



336

Hydraulic Excavator

Technical Specifications

Configurations and features may vary by region. Please consult your Cat® dealer for availability in your area.

Table of Contents

Specifications	2
Engine	2
Swing Mechanism	2
Weights	2
Track	2
Drive	2
Hydraulic System	2
Service Refill Capacities	2
Standards	2
Sound Performance	2
Air Conditioning System	2
Operating Weights and Ground Pressures	3
Major Component Weights	3
Dimensions	4
Working Ranges and Forces	5
Bucket Specifications and Compatibility	6
Attachments Offering Guide	7
Standard and Optional Equipment	8
Dealer Installed Kit and Attachments	9
336 Environmental Declaration	10

336 Hydraulic Excavator Specifications

Engine

Engine Model	Cat® C7.1 TTA	
Net Power		
ISO 9249	223.5 kW	300 hp
ISO 9249 (metric)	304 PS	
Engine Power		
ISO 14396	225 kW	302 hp
ISO 14396 (metric)	306 PS	
Bore	105 mm	4 in
Stroke	135 mm	5 in
Displacement	7.01 L	428 in ³
Biodiesel capability	Up to B20 ⁽¹⁾	

- Meets China Nonroad Stage IV emission standards.
- Recommended for use up to 4500 m (14,760 ft) altitude with engine power derate above 3000 m (9,840 ft).
- Net power is the power available at the flywheel when the engine is equipped with fan, air intake system, exhaust system, and alternator with engine speed at 2,000 rpm.

⁽¹⁾Cat diesel engines are required to use ULSD (ultra-low sulfur diesel fuel with 15 ppm of sulfur or less) or ULSD blended with the following lower-carbon intensity fuels** up to:

- ✓ 20% biodiesel FAME (fatty acid methyl ester)*
- ✓ 100% renewable diesel, HVO (hydrotreated vegetable oil) and GTL (gas-to-liquid) fuels

Refer to guidelines for successful application. Please consult your Cat dealer or “Caterpillar Machine Fluids Recommendations” (SEBU6250) for details.

**Engines with no aftertreatment devices can use higher blends, up to 100% biodiesel.*

***Tailpipe greenhouse gas emissions from lower-carbon intensity fuels are essentially the same as traditional fuels.*

Swing Mechanism

Swing Speed	8.84 rpm	
Maximum Swing Torque	143 kN·m	105,250 lbf·ft

Weights

Operating Weight	36 900 kg	81,400 lb
• Long Wide Undercarriage, Heavy Duty (HD) Reach Boom, HD R3.2 m DB (10'6") Stick, Severe Duty (SD) 2.2 m³ (2.9 yd³) Bucket, 600 mm (24") Double Grouser Shoes, 6.8 mt (15,000 lb) Counterweight.		

Track

Optional Track Shoes Width	600 mm	24 in
Optional Track Shoes Width	700 mm	28 in
Number of Shoes (each side)	49	
Number of Track Rollers (each side)	8	
Number of Carrier Rollers (each side)	2	

Drive

Maximum Gradeability	35°/70%	
Maximum Travel Speed	4.7 km/h	2.9 mph
Maximum Drawbar Pull	302.5 kN	68,005 lbf

Hydraulic System

Main System – Maximum Flow (Implement)	560 L/min (280 × 2 pumps)	148 gal/min (74 × 2 pumps)
Maximum Pressure – Equipment – Implement	35 000 kPa	5,076 psi
Maximum Pressure – Equipment – Lift Mode	38 000 kPa	5,511 psi
Maximum Pressure – Travel	35 000 kPa	5,076 psi
Maximum Pressure – Swing	29 400 kPa	4,264 psi
Boom Cylinder – Bore	150 mm	6 in
Boom Cylinder – Stroke	1440 mm	57 in
Stick Cylinder – Bore	170 mm	7 in
Stick Cylinder – Stroke	1738 mm	68 in
DB Bucket Cylinder – Bore	150 mm	6 in
DB Bucket Cylinder – Stroke	1151 mm	45 in

Service Refill Capacities

Fuel Tank Capacity	600 L	158.5 gal
Cooling System	39 L	10.2 gal
Engine Oil (with filter)	25 L	6.6 gal
Swing Drive	18 L	4.8 gal
Final Drive (each)	8 L	2.1 gal
Hydraulic System (including tank)	373 L	98.5 gal
Hydraulic Tank (including suction pipe)	161 L	42.5 gal
Diesel Exhaust Fluid (DEF) Tank	50 L	13.2 gal

Standards

Brakes	ISO 10265:2008
Cab/Operator Protective Guards (OPG) (optional)	ISO 10262:1998 Level II
Cab/Rollover Protective Structure (ROPS)	ISO 12117-2:2008

Sound Performance

GB/T 25614-2010 external	105 dB(A)
GB/T 25615-2010 internal	72 dB(A)

- Hearing protection may be needed when operating with an open operator station and cab (when not properly maintained or doors/windows open) for extended periods or in a noisy environment.

Air Conditioning System

The air conditioning system on this machine contains the fluorinated greenhouse gas refrigerant R134a (Global Warming Potential = 1430). The system contains 1.00 kg of refrigerant, which has a CO₂ equivalent of 1.430 metric tonnes.

336 Hydraulic Excavator Specifications

Operating Weights and Ground Pressures

	600 mm (24") Double Grouser Track Shoes		600 mm (24") HD Triple Grouser Track Shoes		700 mm (28") Triple Grouser Track Shoes	
	Weight kg (lb)	Ground Pressure kPa (psi)	Weight kg (lb)	Ground Pressure kPa (psi)	Weight kg (lb)	Ground Pressure kPa (psi)
Base Machine Configurations						
Base Frame with Track Rollers and Carrier Rollers						
6.8 mt (15,000 lb) Counterweight + Long Wide Undercarriage						
HD Reach Boom + HD R3.2 m DB (10'6") Stick + 2.2 m ³ (2.9 yd ³) SD Bucket	37 000 (81,600)	68.9 (10.0)	36 900 (81,400)	68.8 (10.0)	36 600 (80,700)	58.4 (8.5)
HD Reach Boom + HD R2.8 m DB (9'2") Stick + 2.2 m ³ (2.9 yd ³) SD Bucket	36 900 (81,400)	69.0 (10.0)	36 800 (81,100)	68.6 (9.9)	36 500 (80,500)	58.3 (8.5)
7.56 mt (16,700 lb) Counterweight + Long Wide Undercarriage						
HD Reach Boom + HD R3.2 m DB (10'6") Stick + 2.2 m ³ (2.9 yd ³) SD Bucket	37 900 (83,500)	70.5 (10.2)	37 800 (83,300)	70.4 (10.2)	37 500 (82,600)	59.8 (8.7)
HD Reach Boom + HD R2.8 m DB (9'2") Stick + 2.2 m ³ (2.9 yd ³) SD Bucket	37 800 (83,300)	70.4 (10.2)	37 700 (83,000)	70.2 (10.2)	37 400 (82,400)	59.7 (8.7)

All operating weights include a 90% fuel tank with 75 kg (165 lb) operator.


Major Component Weights

	kg	lb
Base machine with 6.8 mt (15,000 lb) Counterweight, Standard Swing Frame, Base Frame with Track Rollers and Carrier Rollers for Long Wide Undercarriage	24 160	53,270
Base machine with 7.56 mt (16,700 lb) Counterweight, HD Swing Frame, Base Frame with Track Rollers and Carrier Rollers for Long Wide Undercarriage	25 020	55,160
Track Shoes:		
600 mm (24") Width, 15.5 mm (0.61") Thick, Double Grouser (DG) Track Shoes	4850	10,700
600 mm (24") Width, 15.5 mm (0.61") Thick, HD Triple Grouser (TG) Track Shoes	4750	10,470
700 mm (28") Width, 11 mm (0.43") Thick, TG Track Shoes	4450	9,800
Two Boom Cylinders	670	1,470
Weight of 90% Fuel Tank and 75 kg (165 lb) Operator	550	1,210
Counterweights:		
6.8 mt (15,000 lb) Counterweight	6800	14,990
7.56 mt (16,700 lb) Counterweight	7560	16,670
Swing Frames:		
Standard Swing Frame	3160	6,960
HD Swing Frame	3260	7,180
Undercarriage:		
Base Frame with Track Rollers and Carrier Rollers for Long Wide Undercarriage	8750	19,290
Boom (including lines, pins, stick cylinder):		
HD Reach Boom 6.5 m (21'4")	3480	7,670
Sticks (including lines, pins, bucket cylinder, bucket linkage):		
HD Reach Stick R2.8DB (9'2")	1810	4,000
HD Reach Stick R3.2DB (10'6")	1920	4,220
Bucket (without linkage):		
2.2 m ³ (2.9 yd ³) SD	2060	4,530

336 Hydraulic Excavator Specifications

Dimensions

All dimensions are approximate and may vary depending on bucket selection.

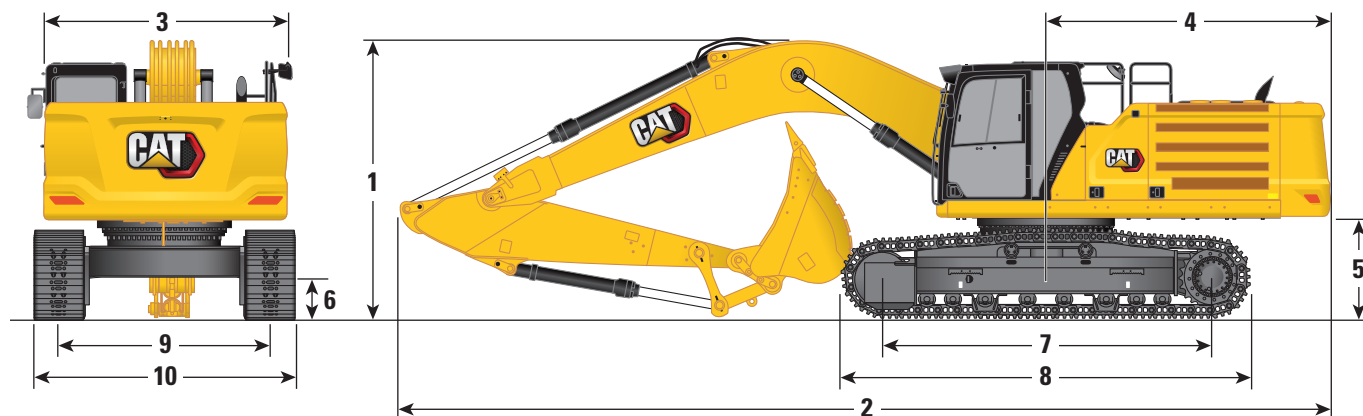


Undercarriage Options		Long Wide Undercarriage			
Boom Option		Reach Boom 6.5 m (21'4")			
Stick Options		Reach Stick			
		R3.2DB (10'6")		R2.8DB (9'2")	
1 Machine Height:					
Cab height	3180 mm	10'5"	3180 mm	10'5"	
OPG height	3330 mm	10'11"	3330 mm	10'11"	
Guardrails/Handrails height	3180 mm	10'5"	3180 mm	10'5"	
With Boom/Stick/Bucket Installed	3520 mm	11'7"	3670 mm	12'0"	
With Boom/Stick Installed	3330 mm	10'11"	3450 mm	11'4"	
With Boom Installed	2880 mm	9'5"	2880 mm	9'5"	
With Boom/Stick/Bucket Installed (with auxiliary lines)	3560 mm	11'8"	3680 mm	12'1"	
With Boom/Stick Installed (with auxiliary lines)	3410 mm	11'2"	3500 mm	11'6"	
With Boom Installed (with auxiliary lines)	2970 mm	9'9"	2970 mm	9'9"	
2 Machine Length:					
With Boom/Stick/Bucket Installed	11 160 mm	36'7"	11 200 mm	36'9"	
With Boom/Stick Installed	11 120 mm	36'6"	11 170 mm	36'8"	
With Boom Installed	9960 mm	32'8"	9960 mm	32'8"	
With Boom/Stick/Bucket Installed (with auxiliary lines)	11 160 mm	36'7"	11 200 mm	36'9"	
With Boom/Stick Installed (with auxiliary lines)	11 120 mm	36'6"	11 170 mm	36'8"	
With Boom Installed (with auxiliary lines)	10 010 mm	32'10"	10 010 mm	32'10"	
3 Upperframe Width without Walkways	2970 mm	9'9"	2970 mm	9'9"	
4 Tail Swing Radius	3530 mm	11'7"	3530 mm	11'7"	
5 Counterweight Clearance	1260 mm	4'2"	1260 mm	4'2"	
6 Ground Clearance	510 mm	1'8"	510 mm	1'8"	
7 Track Length – Length to Center of Rollers	4040 mm	13'3"	4040 mm	13'3"	
8 Track Length	5030 mm	16'6"	5030 mm	16'6"	
9 Track Gauge – Extended	2740 mm	9'0"	2740 mm	9'0"	
10 Track Width/Undercarriage Width:					
600 mm (24") Shoes	3340 mm	10'11"	3340 mm	10'11"	
700 mm (28") Shoes	3440 mm	11'3"	3440 mm	11'3"	
Bucket Type	SD		SD		
Bucket Capacity	2.2 m³	2.9 yd³	2.2 m³	2.9 yd³	
Bucket Tip Radius	1820 mm	6.0 ft	1820 mm	6.0 ft	

336 Hydraulic Excavator Specifications

Working Ranges and Forces

All dimensions are approximate and may vary depending on bucket selection.

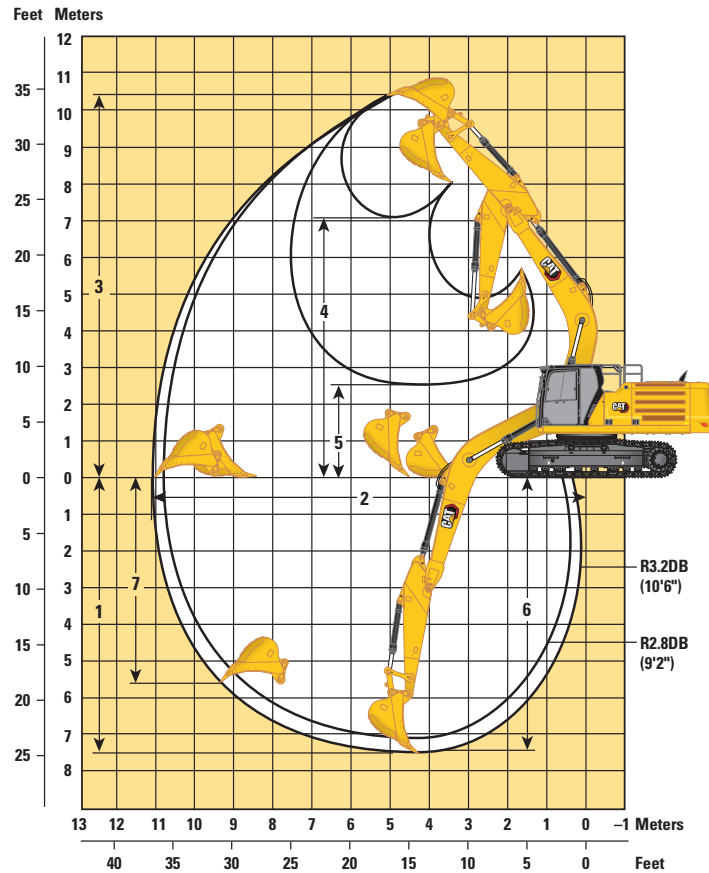

Undercarriage Options

Boom Option

Stick Options

Long Wide Undercarriage

Reach Boom 6.5 m (21'4")

Reach Stick

R3.2DB (10'6")

R2.8DB (9'2")

1 Maximum Digging Depth	7550 mm	24'9"	7150 mm	23'5"
2 Maximum Reach at Ground Line	11 090 mm	36'5"	10 790 mm	35'5"
3 Maximum Cutting Height	10 340 mm	33'11"	10 400 mm	34'1"
4 Maximum Loading Height	7050 mm	23'2"	7050 mm	23'2"
5 Minimum Loading Height	2550 mm	8'4"	2950 mm	9'8"
6 Maximum Depth Cut for 2440 mm (8'0") Level Bottom	7390 mm	24'3"	6980 mm	22'11"
7 Maximum Vertical Wall Digging Depth	5790 mm	19'0"	5750 mm	18'10"
Bucket Digging Force (ISO)	209 kN	46,910 lbf	209 kN	46,910 lbf
Stick Digging Force (ISO)	166 kN	37,270 lbf	184 kN	41,460 lbf
Bucket Type	SD		SD	
Bucket Capacity	2.2 m ³	2.9 yd ³	2.2 m ³	2.9 yd ³
Bucket Tip Radius	1820 mm	6'0"	1820 mm	6'0"

336 Hydraulic Excavator Specifications

Bucket Specifications and Compatibility

									Long Wide Undercarriage			
	Linkage	Width		Capacity		Weight		Fill	6.8 mt (15,000 lb) Counterweight		7.56 mt (16,667 lb) Counterweight	
		mm	in	m³	yd³	kg	lb	%	Reach HD			
									R2.8 HD (9'2")	R3.2 HD (10'6")	R2.8 HD (9'2")	R3.2 HD (10'6")
Pin-On (No Quick Coupler)												
Heavy Duty	DB	1800	71	2.30	3.01	1807	3,980	100	⊖	⊖	⊙	⊖
	DB	1750	69	2.60	3.40	1918	4,224	100	○	○	⊖	○
Severe Duty	DB	1700	67	2.12	2.77	2004	4,417	90	⊙	⊖	●	⊙
	DB	1650	65	2.12	2.77	2019	4,447	90	⊙	⊖	●	⊙
	DB	1750	69	2.20	2.88	2057	4,530	90	⊙	⊖	⊙	⊙
	DB	1800	72	2.31	3.02	2186	4,819	90	⊖	⊖	⊙	⊖
	DB	1650	65	2.38	3.11	2136	4,704	90	⊖	⊖	⊙	⊖
	DB	1750	69	2.20	2.88	2336	5,145	90	⊖	⊖	⊙	⊖
	DB	1650	65	2.38	3.11	2363	5,204	90	⊖	○	⊖	⊖
Severe Duty Spade	DB	1550	61	1.90	2.48	1864	4,109	90	●	⊙	●	●
	DB	1550	61	1.90	2.49	1946	4,286	90	●	⊙	●	●
Severe Duty Extreme	DB	1700	67	2.05	2.68	2274	5,007	90	⊙	⊖	⊙	⊙
	DB	1650	65	2.40	3.14	2362	5,202	90	⊖	○	⊖	⊖
Maximum load with pin-on (payload + bucket)								kg	5540	5220	5950	5620
								lb	12,214	11,508	13,118	12,390
With Cat Pin Grabber Coupler												
Heavy Duty	DB	1800	71	2.30	3.01	1807	3,980	100	○	○	⊖	○
	DB	1750	69	2.60	3.40	1918	4,224	100	◇	◇	○	○
Severe Duty	DB	1700	67	2.12	2.77	2004	4,417	90	⊖	○	⊖	⊖
	DB	1650	65	2.12	2.77	2019	4,447	90	⊖	○	⊖	⊖
	DB	1750	69	2.20	2.88	2057	4,530	90	○	○	⊖	⊖
	DB	1800	72	2.31	3.02	2186	4,819	90	○	◇	⊖	○
	DB	1650	65	2.38	3.11	2136	4,704	90	○	◇	⊖	○
	DB	1750	69	2.20	2.88	2336	5,145	90	○	◇	⊖	○
	DB	1650	65	2.38	3.11	2363	5,204	90	○	◇	○	○
Severe Duty Spade	DB	1550	61	1.90	2.48	1864	4,109	90	⊙	⊖	⊙	⊙
	DB	1550	61	1.90	2.49	1946	4,286	90	⊖	⊖	⊙	⊙
Severe Duty Extreme	DB	1700	67	2.05	2.68	2274	5,007	90	○	○	⊖	⊖
	DB	1650	65	2.40	3.14	2362	5,202	90	○	◇	○	○
Maximum load with coupler (payload + bucket)								kg	4842	4522	5252	4922
								lb	10,675	9,970	11,579	10,852

The above loads are in compliance with hydraulic excavator standard EN474-5:2006 + A3:2013, they do not exceed 87% of hydraulic lifting capacity or 75% of tipping capacity with front linkage fully extended at ground line with bucket curled.

Capacity based on ISO 7451:2007.

Bucket weight with General Duty tips.

Maximum Material Density:

- 2100 kg/m³ (3,500 lb/yd³)
- ⊙ 1800 kg/m³ (3,000 lb/yd³)
- ⊖ 1500 kg/m³ (2,500 lb/yd³)
- 1200 kg/m³ (2,000 lb/yd³)
- ◇ 900 kg/m³ (1,500 lb/yd³)

Caterpillar recommends using appropriate work tools to maximize the value customers receive from our products. Use of work tools, including buckets, which are outside of Caterpillar's recommendations or specifications for weight, dimensions, flows, pressures, etc. may result in less-than-optimal performance, including but not limited to reductions in production, stability, reliability, and component durability. Improper use of a work tool resulting in sweeping, prying, twisting and/or catching of heavy loads will reduce the life of the boom and stick.

336 Hydraulic Excavator Specifications

Attachments Offering Guide

Not all Attachments are available in all regions. Consult your Cat dealer for configurations available in your region.



Match



Working range front only



No Match

PIN-ON ATTACHMENTS

Undercarriage		Long Wide		Long Wide	
Counterweight		6.8 mt (15,000 lb)		7.56 mt (16,667 lb)	
Boom Type		Reach HD		Reach HD	
Stick Length		2.8 m (9'2") HD	3.2 m (10'6") HD	2.8 m (9'2") HD	3.2 m (10'6") HD
Hydraulic Hammers	H130 GC	✓	✓	✓	✓
	H130 GC Side-mount	✓	✓	✓	✓
	H130 GC S	✓	✓	✓	✓
	H140 GC	✓	✓	✓	✓
	H140 GC S	✓	✓	✓	✓
	H160 GC	✓	✓	✓	✓
	H160 GC S	✓	✓	✓	✓
	H175-Side Mount	✓	✓	✓	✓
	H180 GC	✓	✓*	✓	✓
	H180 GC S	✓	✓	✓	✓
	H185 Side-mount	✓*		✓	✓*
Compactors (Vibratory Plate)	CVP110	✓	✓	✓	✓

336 Standard and Optional Equipment

Standard and Optional Equipment

Standard and optional equipment may vary. Consult your Cat dealer for details.

	Standard	Optional		Standard	Optional
BOOMS, STICKS AND LINKAGES			SAFETY AND SECURITY		
6.5 m (21'4") HD Reach boom		✓	Caterpillar One Key security system	✓	
2.8 m (9'2") HD Reach stick		✓	Lockable external tool/storage box	✓	
3.2 m (10'6") HD Reach stick		✓	Lockable door, fuel, and hydraulic tank locks	✓	
DB family bucket linkage without lifting eye		✓	Lockable fuel drain compartment	✓	
CAT TECHNOLOGY			Lockable disconnect switch	✓	
Remote flash	✓		Service platform with anti-skid plate and recessed bolts	✓	
Remote troubleshoot	✓		Right Hand (RH) handrail and handhold	✓	
ELECTRICAL SYSTEM			Signaling/warning horn	✓	
Maintenance-free 1,000 CCA batteries (×2)	✓		Ground-level secondary engine shutoff switch	✓	
Maintenance-free 1,000 CCA batteries (×4)		✓	Rearview camera	✓	
Centralized electrical disconnect switch	✓		Operator Protective Guards		✓
LED exterior chassis and boom lights	✓		UNDERCARRIAGE AND STRUCTURES		
Premium surround working lights		✓	Long wide undercarriage	✓	
ENGINE			Towing eye on base frame	✓	
115 Amp alternator	✓		Full-length track guiding guards		✓
Cold start block heater		✓	Segmented two-piece track guiding guards		✓
Three selectable modes: Power, Smart, Eco	✓		Swivel guard	✓	
Auto engine speed control	✓		HD bottom guard		✓
52° C (126° F) high-ambient cooling		✓	HD travel motor guards		✓
Hydraulic reverse fan		✓	HD rollers		✓
-18° C (0° F) cold start capability	✓		Grease lubricated track	✓	
-32° C (-25° F) cold start capability		✓	HD swing frame		✓
Double element air filter with integrated pre-cleaner	✓		HD swing bearing		✓
Dual stage four micron main filter	✓		6.8 mt (15,000 lb) counterweight		✓
10 micron primary filter with water separator	✓		7.56 mt (16,700 lb) counterweight		✓
Electric fuel priming pump	✓		600 mm (24") double grouser track shoes		✓
Secure start with PIN code	✓		600 mm (24") HD triple grouser track shoes		✓
Remote disable	✓		700 mm (28") triple grouser track shoes		✓
HYDRAULIC SYSTEM			CAB		
Boom and stick regeneration circuit	✓		Operator Protective Guards (OPG)		✓
Electronic main control valve	✓		High-resolution 203 mm (8") LCD touchscreen monitor	✓	
Auto hydraulic oil warmup	✓		High-resolution 254 mm (10") LCD touchscreen monitor		✓
Bio hydraulic oil capability	✓		Auto bi-level air conditioner	✓	
Reverse swing damping valve	✓		Keyless push-to-start engine control	✓	
Auto swing parking brake	✓		Air-suspension seat	✓	
High performance hydraulic return filter	✓		51 mm (2") seat belt	✓	
Two speed travel	✓		Bluetooth radio with USB/Auxiliary ports	✓	
Single one-way circuit	✓		24V DC outlet	✓	
Combined two-way circuit		✓	Beverage holder	✓	
Hydraulic efficiency monitoring		✓	Openable two-piece front window	✓	
SERVICE AND MAINTENANCE			Rear window emergency exit	✓	
Grouped engine oil and fuel filters	✓		Radial wiper with washer	✓	
Scheduled Oil Sampling (S·O·S SM) ports	✓		Openable steel hatch	✓	
Integrated vehicle health management system	✓		LED dome light	✓	
			Roller front sunscreen	✓	
			Roller rear sunscreen		✓
			Washable floor mat	✓	

Dealer Installed Kit and Attachments

Attachments may vary. Consult your Cat dealer for details.

CAB • Polycarbonate roof hatch • Radial lower wiper • Left Hand (LH)/RH electrical pedal for tool control • Rain protector plus cab light cover	ELECTRICAL • Premium surround working lights GUARDS • Mesh guard full front • Mesh guard lower half front • Full protecting vandalism guard	SAFETY AND SECURITY • Bluetooth® receiver kit • Bluetooth key fob • Operator Protective Guards
--	--	---

336 Environmental Declaration

The following information applies to the machine at the time of final manufacture as configured for sale in the regions covered in this document. The content of this declaration is valid as of the date issued; however, content related to machine features and specifications are subject to change without notice. For additional information, please see the machine's Operation and Maintenance Manual.

For more information on sustainability in action and our progress, please visit <https://www.caterpillar.com/en/company/sustainability>.

Engine

- The 336 meets China Nonroad Stage IV emission standards.
- Cat diesel engines are required to use ULSD (ultra-low sulfur diesel fuel with 15 ppm of sulfur or less) or ULSD blended with the following lower-carbon intensity fuels** up to:
 - ✓ 20% biodiesel FAME (fatty acid methyl ester)*
 - ✓ 100% renewable diesel, HVO (hydrotreated vegetable oil) and GTL (gas-to-liquid) fuels

Refer to guidelines for successful application. Please consult your Cat dealer or "Caterpillar Machine Fluids Recommendations" (SEBU6250) for details.

**Engines with no aftertreatment devices can use higher blends, up to 100% biodiesel.*

***Tailpipe greenhouse gas emissions from lower-carbon intensity fuels are essentially the same as traditional fuels.*

Air Conditioning System

- The air conditioning system on this machine contains the fluorinated greenhouse gas refrigerant R134a (Global Warming Potential = 1430). The system contains 1.0 kg (2.2 lb) of refrigerant which has a CO₂ equivalent of 1.430 metric tonnes (1.576 tons).

Paint

- Based on best available knowledge, the maximum allowable concentration, measured in parts per million (PPM), of the following heavy metals in paint are:
 - Barium < 0.01%
 - Cadmium < 0.01%
 - Chromium < 0.01%
 - Lead < 0.01%

Sound Performance

GB/T 25614-2010 external	105 dB(A)
GB/T 25615-2010 internal	72 dB(A)

- Hearing protection may be needed when operating with an open operator station and cab (when not properly maintained or doors/windows open) for extended periods or in a noisy environment.

Oils and Fluids

- Caterpillar factory fills with ethylene glycol coolants. Cat Diesel Engine Antifreeze/Coolant (DEAC) and Cat Extended Life Coolant (ELC) can be recycled. Consult your Cat dealer for more information.
- Cat Bio HYDO™ Advanced is an EU Ecolabel approved biodegradable hydraulic oil.
- Additional fluids are likely to be present, please consult the Operations and Maintenance Manual or the Application and Installation guide for complete fluid recommendations and maintenance intervals.

Features and Technology

- The following features and technology may contribute to fuel savings and/or carbon reduction. Features may vary. Consult your Cat dealer for details.
 - Advanced hydraulic systems balance power and efficiency
 - Smart mode matches machine power to digging requirements automatically
 - Eco mode supports reduced fuel consumption for light applications
 - Reduce fuel consumption with the high-efficiency hydraulic fan that cools the engine on demand
 - Extended service intervals help decrease maintenance costs

For more complete information on Cat products, dealer services, and industry solutions, visit us on the web at www.cat.com

© 2024 Caterpillar
All rights reserved

Materials and specifications are subject to change without notice. Featured machines in photos may include additional equipment. See your Cat dealer for available options.

CAT, CATERPILLAR, LET'S DO THE WORK, their respective logos, "Caterpillar Corporate Yellow," the "Power Edge" and Cat "Modern Hex" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

AEXQ4083-00 (10-2024)
Build Number: 08D
(China)

