
BARFORD

MACHINE SPECIFICATION

SX9000

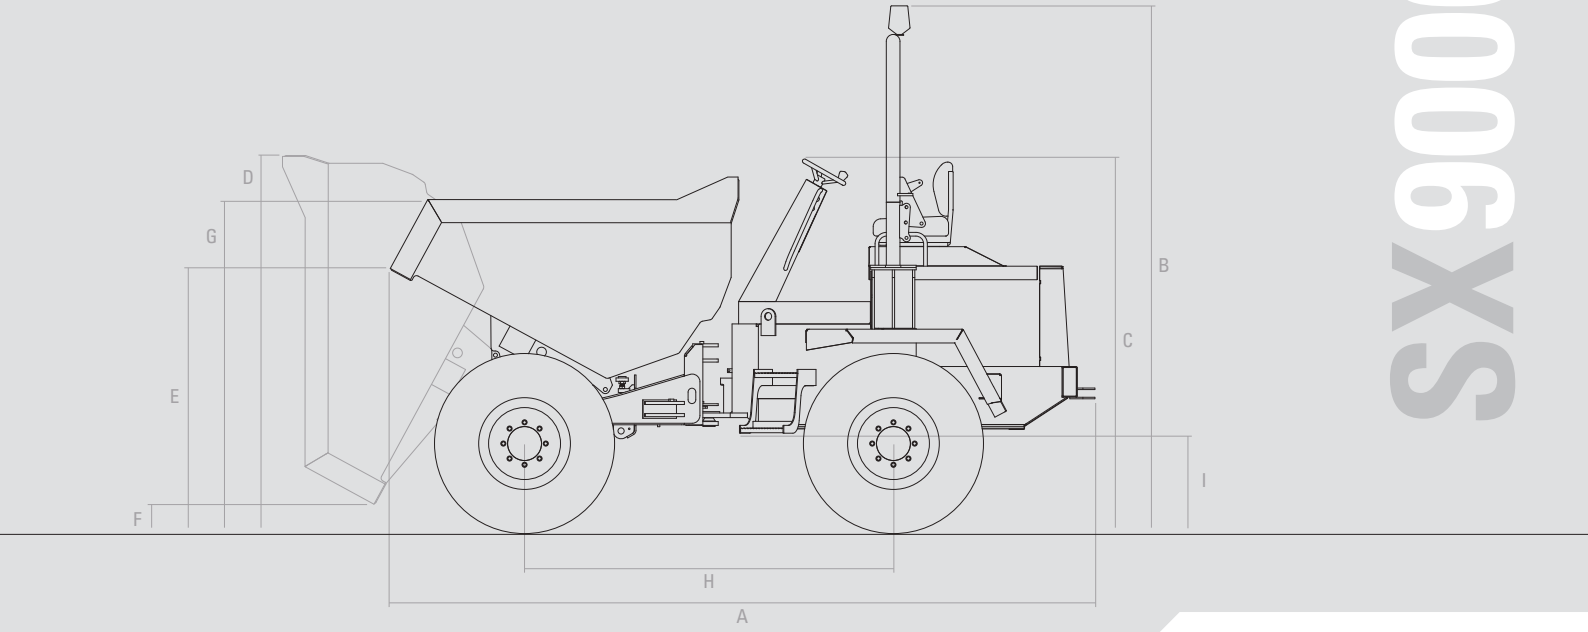


## SX9000: NINE TONNE FORWARD TIPPING DUMPER

| Capacities: | |
|---|---|
| Payload capacity – tonnes | 9 |
| Liquid capacity – ltr | 2052 |
| Struck capacity – ltr | 3287 |
| Heaped capacity – ltr | 4320 |

| Dimensions: | |
|---|---|
| A = overall length – mm | 4250 |
| B = overall height - ROPS up – mm | 3170 |
| C = overall height - ROPS down – mm | 2140 |
| D = overall height - skip tipped – mm | 3633 |
| E = prow height – mm | 1685 |
| F = tipped prow height – mm | 956 |
| G = side loading height – mm | 1960 |
| H = wheel base – mm | 2400 |
| I = ground clearance – mm | 430 |
| Overall width – mm | 2495 |
| Width over tyres – mm | 2310 |
| Outer turning circle – metres | 12.4 |

| Weight: | |
|---|---|
| Unladen weight – kg (with ROPS and full tanks) | 4473 |

| Engine type: | |
|---|---|
| Iveco N45MSSX00 74kW @ 2300rpm | 4485cc |

**Transmission:**

Powershuttle transmission, 4 speeds forward and reverse with torque converter. Heavy duty drive train.

**Axles and brakes:**

Heavy duty double reduction axles with totally enclosed oil immersed disc brake. Transmission parking brake (front only)

| Wheels and tyres: | |
|---|---|
| 18.0 - 19.5 | 16 ply |

| Tank capacities: | |
|---|---|
| 68 ltr fuel tank | 40 ltr hydraulic tank |

| Road speed mph/kph: | | |
|---|---|---|
| 1st gear: | 3.0 | 4.8 |
| 2nd gear: | 4.9 | 7.8 |
| 3rd gear: | 9.2 | 14.7 |
| 4th gear: | 16.7 | 26.8 |

Barford Construction Equipment Houghton Road Grantham Lincolnshire NG31 6JE Tel +44 (0)1476 515510 Fax +44 (0)1476 515450 www.barforddumpers.co.uk

Barford's policy is one of continuous improvement and the right to change prices, specifications or equipment at any time without prior notice is reserved.
All data given on this sheet is subject to production variations. For exact model information and equipment details, please contact your Barford dealer.