



Aftermarket & Technical Manual



This page is intentionally left blank.



Portable Power



Portable Power

Aftermarket and Technical Manual

Copyright 2013. All rights Reserved. Photographs, text and layout of this manual are protected under copyright laws. No part of this manual may be used or reproduced in any manner whatsoever without written permission from Doosan Infracore Co., Ltd.

Doosan Infracore Portable Power

Aftermarket Support and Parts Marketing Manual

Toll Free – 1-800-633-5206

Fax – 704-883-3760

Distributor Portal – www.doosanpassport.com

Public Web Site – www.doosanportablepower.com

Customer Support

Parts identification – Prompt 1

Parts order questions – Prompt 2

8:00 AM to 6:00 PM (EST, USA)

Monday through Friday

After-hours parts emergency support hotline – 336-909-0945

**See policy manual for terms and conditions.*

Technical Support

Machine trouble shooting – Prompt 3

Warranty Administration – Prompt 5

8:00 AM to 5:00 PM (EST, USA)

Monday through Friday

Doosan Infracore Portable Power

1293 Glenway Drive

Statesville, NC 28628

Doosan purchased the Utility Equipment business from Ingersoll-Rand Company in 2007. Any reference to Ingersoll-Rand Company or use of trademarks, service marks, logos, or other proprietary identifying marks belonging to Ingersoll-Rand Company in this manual is historical or nominative in nature, and is not meant to suggest a current affiliation between Ingersoll-Rand Company and Doosan Infracore Portable Power or the products of either.

Last Revised on: April 20, 2015

Section 1: Aftermarket Parts & Support

Merchandise and Marketing	2
Warranties	4
Extended Optional Airend Warranty	4
Extended Optional Powertrain Warranty	4
Compressor Oil	5
Lubricants	6
ProTec™ Lubricants	6
XHP 605	7
XHP 405	7
XHP 1001	8
Doosan Engine Oil	8
Doosan Premium Tier 4 Engine Oil	9
Kilfrost Pneumatic Tool Anti-Freeze Lubricant	10
Starters & Alternators	11
Hoses	21
General Purpose Air Hose	21
Lay Flat Hose	22
Air Hose Fittings	23
Hitch Adapters	24
Safety Lanyards & Clips	25
Paint	25
Doosan Decals	26

Section 2: Airends

Airend Exchange Program	28
Airend Replacement Precautions	28
Airend Exchange Program Objective	29
Doosan Warranty	29

Return of Used Airends	30
Extended Warranty Program	30
Airend Exchange Program Parts List	31
Compressor Modules	40
Oil Field Rigs & Specialized Applications	41
Drill Rigs	42
Footnotes	44
Airend Notes	45
178.5mm Airend Piping Kits	45
XL Airend Adapter Plates (255mm)	45
Oil Piping (General)	46
Tapered Roller Bearings	46
Bearing Oil Cooler Kits	47
High Pressure Airends	47
HR-2 Over/Under Airends	48
CE128 Airends	48
178.5mm and 226mm Airends	49
285mm Airends	49
350mm Airends	49
Airend Serial Code Listing	50

Section 3: Compressors

Legacy Maintenance Kits	56
Maintenance Kits	76
Valves	116
Safety Check Valves	116
Ball Valves - Single	117
Ball Valves - Double	117
Air Line Lubricators with Relief Valve	117
Swing Check Valves	118
Miscellaneous Products	119
Discharge Air Muffler	119
Synflex Hose & Fittings (used on regulation lines)	119
Couplings	120
Hose Reels	128
Legacy Dealer-Installed Options	129
Platinum w/JD4024T	129
250cfm Utility Mount	129
Platinum Models (with metal end panel)	129
Platinum Models (with plastic end panel)	130

Family 1 Models	131
Family 2 Models	132
Miscellaneous Options for Various Models	132
Dealer-Installed Options	134
Small Compressors	134
Medium Compressors	136
Large Compressors	137
Wool-Packed Products	139
Wool-Packed Separator Screens	139
Wool-Packed Kits	139
Vane Sets / Repair Kits	140
Vane Sets	140
Portable Compressor Discharge Sizes	140
Blowdown Valve Diaphragm / Repair Kits	141
UL88 Regulator Repair Kits	141
UL89 Unloader Repair Kits	142
Miscellaneous Repair Kits	142
Door Keys, Latches and Shocks	143
Common Switches	144
Legacy Oil Cooler/Radiator List	146
Oil Cooler/Radiator List	150
Legacy Compressor Manuals	153
Non P-Line Portable Compressor Manuals	153
Compressor Manuals	175

Section 4: Generators

Legacy Maintenance Kits	180
Maintenance Kits	185
Legacy Oil Cooler/Radiator List	195
Oil Cooler/Radiator List	195
E-Series Generator Manuals	197
Legacy Generator Manuals	198
Generator Manuals	199

Legacy Dealer-Installed Options	201
Dealer-Installed Options	202

Section 5: Lighting Systems

Light Towers - Bulbs	208
Value Replacement Bulbs	209
Balloon Lights	209
Legacy Maintenance Kits	210
Maintenance Kits	211
Legacy Light Tower Manuals	214
Light Tower Manuals	214
Legacy Oil Cooler/Radiator List	215
Oil Cooler/Radiator List	215
Dealer-Installed Options	216

Section 6: Light Compaction

Attachments	218
--------------------	------------

Section 7: Reference

Airend Serial Numbers	222
Reading Airend Serial Numbers	222
Airend Serial Number Location	223
Airend Serial Number Locations on Small to Medium Air Compressors	224
Airend Serial Number Locations on Large Air Compressors	224
Compressor Serial Numbers	225
Small to Medium Air Compressor Serial Number Location	225
C185 Air Compressor Serial Number Location	225
Large Air Compressor Serial Number Location	226
Generator Serial Numbers	227
Example of metal plate for models G3.5V-G575	227
Example of decal for models G115/4231703-001	227
Small to Medium Generator Serial Number Location	228
Large Generator Serial Number Location	229
Lighting System Serial Numbers	231
L20	231
L6\L8	231
LS	232
LSC	232

Light Compaction Serial Numbers	233
Reading Light Compaction Serial Numbers	233
Vehicle Identification Numbers (VIN)	234
17 Digit VIN Number Logic	235
Parts Determination	236
A. Model	236
B. Serial Number of Model	239
Doosan Serial Code Listing	242
Product History - By Serial Number	255
Product History - Timeline	257





SECTION 1

Aftermarket Parts & Support

MERCHANDISE AND MARKETING

For all your Doosan branding merchandise and marketing needs please visit:

www.doosanstuff.com



Co-op dollars, credit cards and purchase orders can be used when purchasing items.

Promote the Doosan brand with these **DIECAST MODELS**

We have 3 models to choose from:



part number 36143097

The P185 1:24 scale with opening doors, and fully detailed!



part number 36141406

Doosan LIMITED EDITION Doosan #11 NASCAR®



part number 36141398

Doosan G240 Generator WITH F350 Truck


Order yours today!

www.doosanstuff.com or with your parts orders through SmartEquip

WARRANTIES

Portable Power Aftermarket offers two Extended warranty programs for Portable Power Air Compressors.

Extended Optional Airend Warranty

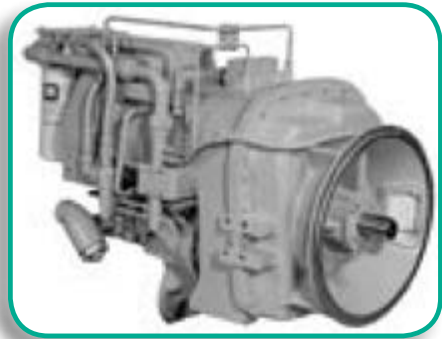


Coverage is applicable for 5 years from compressor shipment or the accumulation of 10,000 hours of service by the user, whichever comes first. The Optional Extended Airend Warranty is limited to defects in major components, and it is automatically available to the user when the following three conditions are met:

- ◇ The original airend is returned assembled and unopened
- ◇ Use of genuine Doosan parts, fluids and filters
- ◇ Maintenance is performed at the prescribed intervals listed in the compressor's maintenance manual

Extended Optional Powertrain Warranty

Doosan Portable Power offers a 5 year/10,000 hour Extended Airend, Engine, & Coupling Warranty with the use of Doosan Protective lubricants and filters on any Platinum or Titanium series compressor.

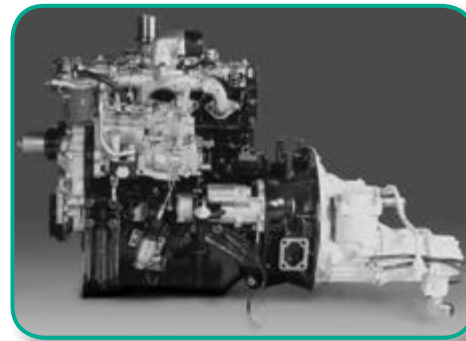

Compressor Fluids				
Properties	ProTec™	XHP405 ⁽¹⁾	XHP605 ⁽¹⁾	XHP1001
Gravity, API	32.2	29.0	35.9	33.2
Specific Gravity	0.869	0.95	.085	0.866
Flash Point COC, C (F)	188(370)	218 (425)	245 (48z9)	230 (440)
Pour Point C (F)	-43°C (-45°F)	-40°C (-40°F)	-42°C (-44°F)	-40°C (-40°F)
Ambient Temperature	-23°C to 52°C (10°F to 125°F)	-23°C to 52°C (-10°F to 125°F)	-23°C to 52°C (-10°F to 125°F)	-21°C to 52°C (70°F to 125°F)

Viscosities				
@ 40°C (cSt)	36	61.2-74.8	64.6	141
@ 100°C (cSt)	7.5	9.5	10.4	18.6
Viscosity Index	163	145	150	149


Packaging				
1 Gallon	36899698	N/A	N/A	N/A
5 Gallon	36899706	22252126	22252076	35612738
55 Gallon	36899714	22252100	22252050	35300516
Bulk Tote	36899722*	22252118**	22252068**	N/A

Reference to this chart for correct compressor fluid is required.

* 275 Gallons ** 220 Gallons

⁽¹⁾ XHP405 and XHP605 is designed for use in compressor systems with operating pressure >300 psi.

Note: The selection of fluid is dependent on the designed operating pressure of the machine and the ambient temperature expected to be encountered before the next oil change.

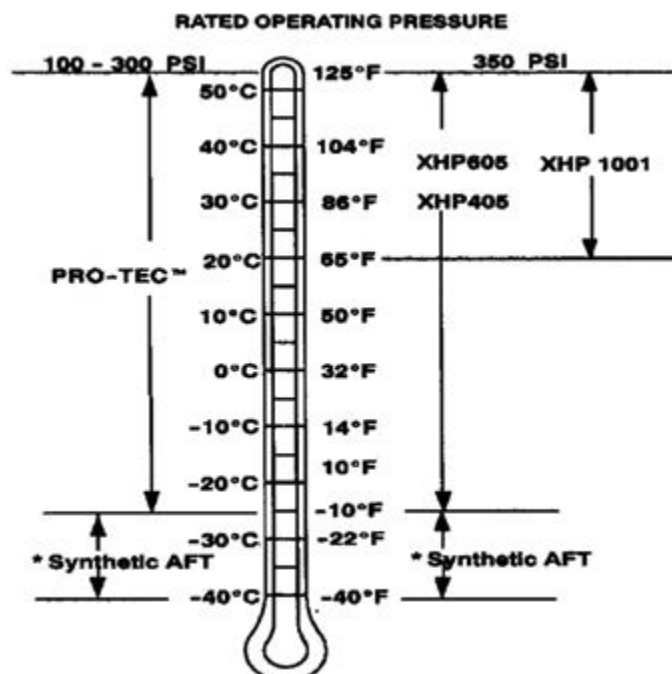

3* Does not qualify for extended warranty.

Fluids		
Type	Pkg Size	Part #
Airend Oil		
ProTec™	1 Gallon	36899698
	5 Gallons	36899706
	55 Gallons	36899714
	1 Tote – 275 Gallons	36899722
XHP605	5 Gallons	22252076
	55 Gallons	22252050
	220 Gallons	22252068
XHP405	5 Gallons	22252126
	55 Gallons	22252100
	220 Gallons	22252118
XHP1001	55 Gallons	35300516
Engine Oil		
Doosan Engine Oil	1 Gallon	54480918
	5 Gallons	36875938
	55 Gallons	36866903
Doosan Premium Tier 4 Oil	1 Gallon	46557017
	5 Gallons	46557016
	55 Gallons	46557015
Other		
Kilfrost	Pint Cans (24/case)	35379718
	1 Gallon (4/case)	35379726
	5 Gallons	35379734
	55 Gallons	35379742

ProTec™ Lubricants

ProTec™ Compressor Fluid is designed specifically for the high performance demands of Doosan compressors up to 300 psi. Our proprietary formulation achieves superior performance and extends your equipment life.

- ◇ Exceptional equipment wear protection
- ◇ High-performing lubricating wear strength
- ◇ Reduced foaming and fluid loss
- ◇ Excellent low-temperature performance
- ◇ Protection against high-temperature deposit formation

Part #	Pkg Size	Description
36899698	1 Gallon	
36899706	5 Gallons	
36899714	55 Gallons	
36899722	275 Gallons	Tote

XHP 605

XHP 605 is a hydrocarbon-based synthetic lubricant, using a patented process, designed and approved for Doosan compressors operating above 300 psi.

- ◇ Your best choice for high operating temperatures – providing outstanding thermal & oxidation stability
- ◇ With its high level of purity and refinement, along with unique additives, this lubricant provides a high viscosity index, high flash point, and a low pour point
- ◇ Prevents excessive carry-over into service air
- ◇ Reduced oil consumption – low volatility and lower evaporation loss means less oil goes downstream

Part #	Pkg Size	Description
22252076	5 Gallons	Red Plastic Pail
22252050	55 Gallons	Red Drum
22252068	220 Gallons	Disposable Kraft Tote



XHP 405

An exclusive Doosan lubricant created and approved for all makes of rotary screw compressors operating above 300 psi.

- ◇ Low carbon tendencies minimize sludge and deposits
- ◇ Excellent protection against rust & oxidation
- ◇ Non-Hazardous fluid: XHP 405 passed the acute aquatic toxicity (LC-50) criteria adopted by the U.S. Fish and Wildlife Service & the U.S. Environmental Protection Agency

Part #	Pkg Size	Description
22252126	5 Gallons	Black Plastic Pail
22252100	55 Gallons	Black Drum
22252118	220 Gallons	

XHP 1001

The steadiness of its thermal, hydrolytic and oxidation behavior, high viscosity index and flash point, and low pour point extends crankcase drain intervals compared with those obtained with mineral oils. Compressor operators can realize minimal equipment downtime and used oil disposal costs.

- ◇ Synthetic lubricant promotes long life in high temperature operations and less frequent oil changes
- ◇ Helps promote long service intervals which can minimize the costs of maintenance and downtime
- ◇ Maximum compressor efficiency due to low carbon-forming tendency minimizes deposits
- ◇ Reduces oil carryover downstream and less makeup oil is needed

Part #	Pkg Size	Description
XHP1001	55 Gallons	35300516

Doosan Engine Oil

Doosan Engine Oil is designed to provide superior protection in diesel and gasoline engines. The anti-wear additive safeguards engine from valve and lifter damage under severe loading conditions while the alkalinity delivers protection from acids formed by oxidation and heavy duty service. Doosan engine oil satisfies the critical lubrication needs of the most modern engine while continuing to excel in pre 1999 diesel engines.

Doosan 15W-40 engine oil meets or exceeds the following requirements:

- ◇ API service CH-4, CI-4, CG-4, CF, SJ, SL
- ◇ ACEA E7

Part #	Pkg Size	Description
54480918	1 Gallon	
36875938	5 Gallons	Pail
36866903	55 Gallons	Drum



Doosan Premium Tier 4 Engine Oil

Doosan 15W-40 Tier 4 diesel engine oil delivers the highest performance for the most severe on and off-highway applications. Specially formulated for extra high performance in Tier 4, low-emission engines including those with Exhaust Gas Recirculation (EGR) and After-treatment systems with Diesel Oxidation Catalysts (DOCs) and Diesel Particulate Filters (DPFs). One oil for mixed fleets: 100% backwards compatible for engines with or without emissions control devices.

Doosan 15W-40 Tier 4 certified engine oil meets or exceeds the following requirements:

- ◇ API service classification CJ-4, CI-4 PLUS, CH-4, CI-4, CF/SM, SL
- ◇ API Service CF-2
- ◇ ACEA E7/E5
- ◇ Caterpillar ECF-3
- ◇ Cummins CES 20081
- ◇ Detroit Diesel Power Guard Oil Specification 93K218
- ◇ API SM specification for gasoline engines

Performance Features:



- ◇ Component compatibility providing long life to critical components such as after-treatment systems
- ◇ One oil for mixed fleets: 100% backwards compatible for engines with or without emissions control devices
- ◇ Patented additive technology helps reduce ash deposits while delivering outstanding oxidation and wear performance
- ◇ Superior low temperature pumpability offers faster oil flow and reduced engine wear
- ◇ Stay-in-grade sheer stability maintains viscosity in severe, high temperatures
- ◇ Shows outstanding performance in the ability to handle soot efficiency and longer engine life
- ◇ Excellent thermal and oxidative stability to minimize sludge build-up and deposits
- ◇ Excellent protection against corrosive wear
- ◇ Outstanding protection against abrasive wear

Part #	Pkg Size	Description
46557017	1 Gallon	
46557016	5 Gallons	Pail
46557015	55 Gallons	Drum

Kilfrost Pneumatic Tool Anti-Freeze Lubricant

- ◇ Prevents freezing of pneumatic equipment
- ◇ Provides superior lubrication of working surfaces
- ◇ Easily fed by airline lubricators , used in oil reservoirs, or introduced by an oil can
- ◇ SHOULD NOT be mixed with ordinary tool oils
- ◇ Tool reservoir MUST be emptied before use so deicing properties are not impaired

Part #	Pkg Size	Description
35379718	Pint Cans	24 per Case
35379726	1 Gallon	4 per Case
35379734	5 Gallons	w/ Pour Spouts
35379742	55 Gallons	Non-returnable

Kilfrost Pneumatic Tool Anti-Freeze Lubricant* Conforms to the following physical constants:

Specific Gravity @ 60°F	1.076
Density, Pounds per gallon	8.964
Viscosity, SUS @ 100°F	300
PH Value (50:50 mix with water)	8.2
Pour Point, °F	-20
Color ASTM	3 1/2 - 4 1/2
Cast Iron Chip Rust (50:50 mix with water)	Negative

**Kilfrost is a synthetic lubricant which combines permanently with water. However, its lubricating ability is independent of water content. Kilfrost is non-corrosive, non-toxic and non-flammable. The use of Kilfrost Pneumatic Tool Anti-Freeze Lubricant has been approved by leading manufacturers of pneumatic equipment throughout the world. Doosan Infracore Portable Power is not responsible for misuse and/or misapplication of this product.*

STARTERS & ALTERNATORS

Model Name	Serial Code	Reman Alternator	New Alternator	Reman Starter	New Starter
Air Compressors 65 CFM - 650 CFM					
XP185AWIR ENG. MOD.		36140085		36140325	
XP185JD GALV	016	36140259		36140515	
XP185WIR		36140085		36140325	
XP185WIR-D14 ENG./AE	D14	36140085		36140325	
XP185WJD		36140259		36140515	
XP375A WIR	080	36140218 & 36140283		36140457	
XP375BWIR	A57	36140218 & 36140283		36140457	
XP375BWIR 2007 (credit permitted)	C75			36140457	
XP375BWIR 2007 (export only)	C71	36140218 & 36140283		36140457	
XP375BWIR 2007 IR FLEX	C99			36140457	
XP375BWJD EXPORT	757	36140218 & 36140283		36140457	
XP375WIR	061	36140192	36140556	36140424	36140317
XP375WJD	047	36140218 & 36140283		36140457	
XP375WJD-T3	C48	36140283	22206221	36140457	22206213
XP525AWCU		36140218 & 36140283			
AIRSOURCE 160 T2 OPC		36140176		36140366	
AIRSOURCE PLUS IR OPC		36140176		36140366	
AIRSOURCE PLUS JD OPC CP		36140242		36140499	
AIRSOURCE+JD-T4I	D68	36140242	22607576	36140499	22607519
BAP185		36140259		36140515	
BAP185R				36140515	
C185WKUB-T2	E04	36140176	22568182	36140366	22496939
C185WKUB-T2 (before 9/28/2009)	D80	36140127	22496947	36140366	22496939
C185WKUB-T2 (after 9/28/2009)	D80	36140218	22567929	36140366	22496939
HP300BWCU	396	36140226			
HP300BWCU GALV	025	36140226			
HP300WJD		36140259			
HP300WJD GALV	026	36140259			
HP365WIR	062	36140192	36140556	36140424	36140317
HP375A		36140218 & 36140283		36140457	

Model Name	Serial Code	Reman Alternator	New Alternator	Reman Starter	New Starter
HP375BWIR	A59	36140218 & 36140283		36140457	
HP375BWIR	D02	36140283	22206221	36140457	22206213
HP375BWIR	C73	36140283	22206221	36140457	22206213
HP375BWIR 2007 (export only)		36140218 & 36140283		36140457	
HP375BWIR 2007 IR FLEX				36140457	
HP375BWJD (export only)	758	36140218 & 36140283		36140457	
HP375CWIR	C47	36140283	22206221	36140457	22206213
HP375WIR-T2	085	36140218 & 36140283		36140457	
HP375WJD-T3	D54	36140218	23229511	36140457	22206213
HP375WJD	064	36140218 & 36140283		36140457	
P425BWIR	D01	36140283	22206221	36140457	22206213
P425BWIR	C72	36140283	22206221	36140457	22206213
P425WJD-T3	C46	36140283	22206221	36140457	22206213
HP450AWCU		36140218 & 36140283			
HP450AWIR	A61	36140218 & 36140283		36140457	
HP450AWIR	C86	36140283	22206221	36140457	22206213
HP450AWIR 2007	C80			36140457	
HP450AWIR AE/ENG. GROUP 2007 IR FLEX	C83			36140457	
HP450WIR		36140218 & 36140283		36140457	
HP450WIR-T2	279	36140218 & 36140283		36140457	
HP450WIR-T2-KS				36140457	
HP450WIR-T2-NL				36140457	
HP450WJD-T3	C55	36140283	23229511	36140457	22206213
HP600CWCU GALV	742	36140184	36140549		
HP600WJD		36140200		36140440	
HP675CWCU	B74	36140184	36140549		
KUBOTA D722 TIER 4 ENG. VHP40RMD-T4	D64	36140119	36140572	36140358	
HP375BWIR 2007 (credit permitted)	C77			36140457	
P600WIR-T2	278	36140218 & 36140283		36140457	
P90WIRU-T4I	D50	36140093	22255434	36140333	22255442
P105JD GALV	010	36140234		36140507	
P110AWIR ENG. MOD.		36140093		36140341	
P125WJD GALV	011	36140234		36140507	

Model Name	Serial Code	Reman Alternator	New Alternator	Reman Starter	New Starter
P130JDU MOD. UTILITY		36140234		36140507	
P130WJD GALV	012	36140234		36140507	
P135BWIR ENG. MOD.	D10	36140093		36140341	
P135WIR		36140093		36140341	
P160BWIR ENG. MOD.		36140176		36140366	
P160CWIR ENG. MOD.		36140127		36140366	
P160WJD GALV	013	36140234		36140507	
P175JDU MOD. UTILITY		36140234		36140507	
P175WJD GALV	014	36140234		36140507	
P175WJDU		36140234		36140507	
P185BWIR ENG. MOD.		36140176		36140366	
P185FWJD ENG./AE MOD. JD	D09	36140242		36140499	
P185GWJD ENG./AE MOD.	D08	36140242		36140499	
P185GWJD RE-RATE TIER2	B73	36140242		36140499	
P185GWJD TIER2 ENG.		36140242		36140499	
P185HWJD RE-RATE TIER4I	D11	36140242		36140499	
P185JD CA RERATE	231			36140515	
P185JD CA RERATE GALV				36140515	
P185JD ENG. MOD.		36140242		36140499	
P185JD GALV	015	36140259		36140515	
P185JD MOD.		36140259		36140515	
P185JDU RERATE				36140515	
P185WIR		36140085		36140325	
P185WIR-D07 ENG. MOD.	D07	36140085		36140325	
P185WJD HK		36140259		36140515	
P185WJD-D75 ENG./AE MOD.	D75	36140242		36140499	
P185WJDU		36140259		36140515	
P185WJDU W/SAE B AUX		36140234		36140515	
P185WJDU-T4I	D99	36140242	22607576	36140499	22607519
P185WYM-T4I	D76		46555550	36140341	22255558
P250AWCU		36140226			
P250BWJD					
P250JDU W/AUX MOD.		36140234		36140515	
P250WJD		36140259		36140515	
P250WJDU		36140234		36140515	
P250WJD-T3	D81	36140259	36125334	36140507	36120269
P260AWIR ENG. AE GROUP		36140085		36140325	
P260WIR-T3	D13	36140085	22255574	36140325	22255566
P260AWIR MIL 24V		36140085		36140325	
P260/HP220WYM-T3	D82	36140085	22255574	36140325	22255566
P375BWCU		36140226			
P375BWCU GALV	023	36140226			
P375WJD		36140259			

Model Name	Serial Code	Reman Alternator	New Alternator	Reman Starter	New Starter
P375WJD GALV	024	36140259			
P425BWIR 2007 (credit permitted)	C76			36140457	
P425BWIR 2007 (export only)		36140218 & 36140283		36140457	
P425BWIR 2007 IR FLEX				36140457	
P425BWIR JD ENG.	A58	36140218 & 36140283		36140457	
P425CWIR AIREND MOD.		36140218 & 36140283		36140457	
P425WIR	060	36140192	36140556	36140424	36140317
P425WIR-T2-EB JD ENG.	081	36140218 & 36140283		36140457	
P600AWCU		36140218 & 36140283			
P600AWIR 2007 CP SUPER STD	C85			36140457	
P600AWIR 2007 (export only)	C79			36140457	
P600AWIR AE/ENG. GROUP 2007 IR FLEX				36140457	
P600WIR-T3-GAL		36140218 & 36140283		36140457	
P600WIR-FLEX	C82	36140283	22206221	36140457	22206213
P600WJD-T3	C54	36140218	23229511	36140457	22206213
P65WK	D52	36140135		36140374	36140291
P65WKU	D53	36140135		36140374	36140291
P90BWIR-STD	C17	36140093		36140333	
P90BWIR-UTM	C16	36140093		36140333	
P90WIR		36140093		36140333	
P90WIRU		36140093		36140333	
USMC P260WIR MIL 24V	004			36140432	
VHP110JDU ENG. MOD.		36140234		36140507	
VHP300A WIR	086	36140218 & 36140283		36140457	
VHP300BWIR	A60	36140218 & 36140283		36140457	
VHP300BWIR	D03	36140283	22206221	36140457	22206213
VHP300BWIR 2007 (credit permitted)	C78			36140457	
VHP300BWIR 2007 (export only)	C74	36140218 & 36140283		36140457	
VHP300BWIR 2007 IR FLEX				36140457	
VHP400AWIR	A62	36140218 & 36140283		36140457	
VHP400AWIR 2007	C81			36140457	

Model Name	Serial Code	Reman Alternator	New Alternator	Reman Starter	New Starter
VHP400AWIR 2007 CP SUPER STD	C87			36140457	
VHP400AWIR AE/ENG. GROUP 2007 IR FLEX				36140457	
VHP400WIR-T2-EB	289	36140218 & 36140283		36140457	
VHP400WIR-T2-FLEX	C84	36140283	22206221	36140457	22206213
VHP400WJD-T3	C56	36140283	23229511	36140457	22206213
VP300WIR	063	36140192	36140556	36140424	36140317
WW600 TIER 3 ESA		36140218 & 36140283		36140457	
Air Compressors 725 CFM and Greater					
HP750CWCU	B76	36140184	36140549		
HP750CWCU GALV	744	36140184	36140549		
HP750WCU-FX-T3	E19		22616965		22345755
HP750WJD		36140200		36140440	
HP750WJD GALV	745	36140200		36140440	
HP825DWCU MOD.	722	36140184	36140549		
HP900AWCAT	055	36140184	36140549	36140416	36140309
HP900WCAT		36140184	36140549		
HP915WCU		36140184	36140549		
HP915WCU-FX-T3	E16		23061674		22178107
HP935WCU-T1-LRGP	E78	36140184	36140549		
950 HA-CAT		36140184	36140549		
CAT C-18 SAO XHP1170		36140077			
OBSOLETE ENG./AE MHP825WCAT		36140184	36140549		
MHP825 W CAT EMU RERATE		36140184	36140549		
MHP825 WCAT	C04	36140184	36140549		
MHP825A CAT EXPORT		36140184	36140549		
MHP825AWCAT EXPORT	B19	36140184	36140549		
MHP825BWCAT RERATE MSA	B15	36140184	36140549		
MHP825C W CAT		36140184	36140549		
MHP825WCAT MSA	B98	36140184	36140549		
MHP825WCU-FX-T3	E17		23061674		22178107
MIXAIR-741 PORTABLE COMP		36140093		36140341	
P1060 W-CAT	C06	36140184	36140549		
RHP1070WCAT EXPORT 290		36140184	36140549		
SHP750AWCAT	B95	36140184	36140549		
SHP750WCAT RERATE	B17	36140184	36140549		
SHP825AWCAT EXPORT	B21	36140184	36140549		
SHP825WCAT	843	36140184	36140549		
VHP750 W-CAT	C03	36140184	36140549		

Model Name	Serial Code	Reman Alternator	New Alternator	Reman Starter	New Starter
VHP750AWCAT		36140184	36140549	36140416	36140309
VHP750B W-CAT		36140184	36140549		
VHP750BWCAT MSA	844	36140184	36140549		
VHP750CWCAT EXPORT	B18	36140184	36140549		
VHP750DWCAT RERATE MSA	B14	36140184	36140549		
VHP750E W CAT		36140184	36140549		
VHP750WCU		36140184	36140549		
VHP825WCU MOD.		36140184	36140549		
VHP850AWCAT		36140184	36140549	36140416	36140309
XHP1070 CAT		36140184	36140549		
XHP1070 CAT EXPORT		36140184	36140549		
XHP1070ACAT		36140184	36140549		
XHP1070CSCAT EXPORT	B48	36140184	36140549		
XHP1070DWCAT EXPORT	B46	36140184	36140549		
XHP1070SCAT		36140184	36140549		
XHP1070SCAT A/E		36140184	36140549		
XHP1070WCAT		36140184	36140549		
XHP1070WCAT TIER 3	B41	36140184	36140549		
XHP1170 A FRAME-CAT-S		36140184	36140549		
XHP1170BSCAT EXPORT	B47	36140184	36140549		
XHP1170BWCAT EXPORT	B45	36140184	36140549		
XHP1170CAT		36140184	36140549		
XHP1170FRAMECAT	B78	36140184	36140549		
XHP1170SCAT		36140184	36140549		
XHP1170SCAT		36140184	36140549		
XHP1170SCAT A/E		36140184	36140549		
XHP1170WCAT	B40	36140184	36140549		
XHP650 CAT EXPORT		36140184	36140549	36140416	36140309
XHP650AWCAT		36140184	36140549	36140416	36140309
XHP650BWCAT EXPORT	445	36140184	36140549	36140416	36140309
XHP700A		36140184	36140549		
XHP700AWCAT		36140184	36140549		
XHP700WCAT RERATE	B16	36140184	36140549		
XHP750 CAT EXPORT		36140184	36140549	36140416	36140309
XHP750 E W CAT		36140184	36140549		
XHP750AWCAT		36140184	36140549	36140416	36140309
XHP750CWCAT MSA		36140184	36140549		
XHP750EWCAT		36140184	36140549		
XHP750SCAT		36140184	36140549		
XHP750W CAT		36140184	36140549		
XHP750WCAT-T2-WRG EXPORT	B20	36140184	36140549		
XHP825AWCAT		36140184	36140549	36140416	36140309
XHP825CAT EXPORT		36140184	36140549	36140416	36140309

Model Name	Serial Code	Reman Alternator	New Alternator	Reman Starter	New Starter
XHP900AWCAT		36140184	36140549		
XHP900BCAT EXPORT		36140184	36140549		
XHP900WCU		36140184	36140549		
XP1000AWCAT		36140184	36140549	36140416	36140309
XP1000WCU		36140184	36140549		
HP1600ASCAT EXPORT	B49	36140184	36140549		
HP1600SCAT		36140184	36140549		
HP1600WCAT		36140184	36140549		
XP1050WCU MOD.		36140184	36140549		
XP1050WCU-T1-LRGP		36140184	36140549		
XP1050WCU-T1-LRGP-CD-GAL		36140184	36140549		
XP1050WCU-T1-LRGP-PT-XX DTL		36140184	36140549		
XP1050WCU-T1-LRG-PT-XX DTL		36140184	36140549		
XP1060 HA-CAT EMU 226	A19	36140184	36140549		
XP750CWCU	B75	36140184	36140549		
XP750CWCU GALV		36140184	36140549		
XP750WCU-ML-T3	E33		23061674		22345755
XP750WCU-T2	C08		22616965		22345755
XP750WJD		36140200		36140440	
XP825CWCU		36140184	36140549		
XP825CWCU GALV		36140184	36140549		
XP825WCU-FX-T3	E20		22616965		22345755
XP825WJD		36140200		36140440	
XP825WJD GALV		36140200		36140440	
XP900DWCU MOD.		36140184	36140549		
XP950 W-CAT	C05	36140184	36140549		
XP1000WCU-FX-T3	E18		23061674		22178107
XXHP1270FCAT-T3	E13		46490603		46490611
XXHP1270FCAT-FX-T3	E12		46490603		46490611
XXHP1300/1500 TIER3	D58	36140184	36140549		
Generators					
PowerSource G145	C27	36140267		36140465	
PowerSource G185	C28	36140267		36140473	
PowerSource G240	C31	36140267		36140473	
PowerSource G450	C34	36140184	36140549		
PowerSource G570	C37	36140184	36140549		
PowerSource G70	D63	36140267		36140465	
PowerSource G80		36140234			
PowerSource G90	C24	36140267		36140465	
G10A	B63	36140143		36140382	
G10B 60HZ	D60			36140382	
G125	B61	36140267		36140473	

Model Name	Serial Code	Reman Alternator	New Alternator	Reman Starter	New Starter
G125 2007	C89	36140267		36140473	
G125 2007 (credit permitted)	C91	36140267		36140473	
G125 2007 FLEX ENG./ALT 60HZ	C93	36140267		36140473	
G145 2003 MOD.		36140234			
G145WJD-2A-FX-T3	E22	36140267	36125813	36140465	36115921
G185WJD-2A-FX-T3	E23	36140226	36125813		36126092
G20 50Hz		36140150		36140390	
G25A 2004 MOD.		36140150		36140390	
G25B ENG./ALT	B54	36140150		36140390	
G25C 60HZ	D61	36140150		36140390	
G290WCU-3C-FX-T3	E27		23061674		22345755
G290WCU-3B-FX-T3	E26		23061674		22345755
G240WJD-2C-FX-T3	E25				46556153
G240WJD-2B-FX-T3	E24				46556153
G240WJD-2C-T3	D97	36140226		36140473	36126092
G40 2003 MOD.		36140150		36140390	
G40 NOVA ENG./ALTERNTR	B50	36140150		36140390	
G400-50HZ		36140184	36140549		
G450WCU-2C-FX-T3	E29	36140184	36867836		46556155
G450WCU-2B-FX-T3	E28	36140184	36867836		46556155
G450WCU-2C-T2	D96	36140184	36867836		23061633
G40A 2004 MOD.		36140150		36140390	
G40C 60HZ	D62	36140150		36140390	
G500-50HZ		36140184	36140549		
G570WCU-2C-FX-T3	E31	36140184	36867836		23061633
G570WCU-2B-FX-T3	E30	36140184	36867836		23061633
G570WCU-2C-T2	D78	36140184	36867836		23061633
G60-T2-CL		36140242		36140499	
G70 2003 MOD.		36140234			
G75 2004 MOD.		36140234			
G80 ENG./ALT		36140267		36140465	
G80A 2007	C88	36140267		36140465	
G80A 2007 (credit permitted)	C90	36140267		36140465	
G80A 2007 FLEX ENG./ALT G60HZ	C92	36140267		36140465	
G90 2003 MOD.		36140234			
NOVA G10 50Hz ENG./ALT		36140150		36140382	
NOVA G30 50HZ ENG./ALT	B85	36140150		36140390	
ENG./GEN 50HZ		36140101		36140358	
ENG./GEN HA 60HZ		36140101		36140358	
ENG./ALT G160-50HZ		36140267		36140473	
ENG./ALT G200-50HZ		36140267		36140473	

Model Name	Serial Code	Reman Alternator	New Alternator	Reman Starter	New Starter
ENG./ALT G40-50HZ		36140168		36140390	
ENG./ALT G60-50HZ		36140234		36140465	
ENG./ALT MOD. G80-50HZ		36140234		36140465	
Light Towers					
UK LIGHTSOURCE		36140101		36140358	
L20-4MH	D55	36140150		36140390	
L5K	836	36140101		36140358	
L6 ENG. & GEN		36140119	36140572		
L6 ENG./GEN 50HZ TIER2		36140101		36140358	
L6 ENG./GEN 60HZ TIER2		36140101		36140358	
L6D ENG./GEN 60HZ TIER2	C45	36140101		36140358	
L6E 60HZ LS T4 ENG./ALT	D48	36140101		36140358	
L8 ENG. & GEN		36140101		36140358	
L8 ENG./GEN 60HZ TIER2		36140101		36140358	
L8D 60HZ LS T4 ENG./ALT	D49	36140101		36140358	
LIGHTSOURCE B 60HZ T4		36140101		36140358	
LIGHTSOURCE ENG./GEN 50HZ		36140101		36140358	
LIGHTSOURCE ENG./GEN 60HZ		36140119	36140572		
LIGHTSOURCE ENG./GEN CHIN		36140101		36140358	
LTSOURCE A 50HZ ENG./GEN	D57	36140101		36140358	
LTSRC ENG./GEN 50HZ TIER2		36140101		36140358	
LTSRC ENG./GEN 60HZ TIER2		36140101		36140358	
LTSRC ENG./GEN C 60HZ	D56	36140101		36140358	
LTSRC ENG./GEN HA TIER2		36140101		36140358	
LTSRC ENG./GEN A 60HZ		36140101		36140358	
LTSRC ENG./GEN A HA 60HZ		36140101		36140358	
LTSRC ESA 50HZ		36140101		36140358	
LTSRC UK 50HZ		36140101		36140358	
LSCWKUB-60HZ-T4F	E83	36140101	36888170	36140358	22986517
LSC-60HZ-T4F Mitsubishi	E06		46549648		46549655
LS-60HZ-T4F	D98	36140101	36888170	36140358	22986517
LS-60HZ-T4F	D92	36140101	36888170	36140358	22986517
L8-60HZ-T4F	D89		36888501	36140358	22986517
L6-60HZ-T4F	D88	36140101	36888170	36140358	22986517
L20-60HZ-T4I	D59	36140143	22843585	36140390	85400570
NAVY 6KW HS HA LS ENG. FEATURE		36140101		36140358	
NAVY 6KW HS HA LS TIER2		36140101		36140358	
ESA LTSRC		36140101		36140358	

Model Name	Serial Code	Reman Alternator	New Alternator	Reman Starter	New Starter
NAVY 6KW HS HA LS TIER 2 W/FRAME 36 ALTERNATOR		36140101		36140358	
ENG./ALT L20T4		36140150		36140390	
USMC 6KW MH HA LS TIER2		36140101		36140358	

General Purpose Air Hose

- ◇ Handles medium working pressure in moderately tough service conditions
- ◇ Wire braided, oil-resistant, and ruggedly protects from abrasion
- ◇ Easily identifiable by its blue rubber and beige spiral stripe



Doosan's Best Wire Braided Air Hose				Cost Effective Wire Braided Air Hose		
Size	Part #	Length	WPSI	Part #	Length	WPSI
1/2"	N/A			35375450	100	1000
3/4"	35366707	100	850	35366566	50	850
1"	35366715	100	850	35366574	50	1000
1 1/4"	35366723	50	800	35366582	50	650
1 1/2"	35366731	50	600	35366590	50	500
2"	35366749	50	500	35367010	50	400
2"	35612712	100	500	35612720	100	500
2 1/2"	35366756	50	500	35366616	50	500
3"	35366764	50	500	35366624	50	400
4"	35366772	50	400	35366632	50	400
Temperature Rating: -40°F to 268°F				Temperature Rating: -40°F to 180°F		

The above non-coupled part numbers represent a "per foot" measurement.
Example – A quantity of 50 would be ordered if customer wants a 50' section.

	Part #	
3/4" x 50 ft. coupled with Dixon GF26 Fitting and B9 Clamp	35380872	(N3)
1" x 50 ft. coupled with Dixon GF36 Fitting and MS11 Fitting and BU14 Clamp	35380880	(N3)
2" x 33 ft. continuous length not coupled	36894079	(N1460-500 WPSI)
2" x 50 ft. coupled with Dixon brand fittings	35367671	(N3)
2" x 50 ft. coupled with Dixon brand fittings	36891919	(N730-500WPSI -40°F to 180°F Rating)
2" x 50 ft. coupled with Dixon brand fittings	35366608	(Cost effective hose)
2" x 100 ft. coupled with Dixon brand fittings	35367689	(N3)
2" x 100 ft. coupled with Dixon brand fittings	36895365	(N1460-500WPSI)
2" x 100 ft. continuous length not coupled	35377746	(N3)
2" x 100 ft. continuous length not coupled	35394014	(N3000-900 WPSI)
2 1/2" x 100 ft. continuous length not coupled	36921104	(N-3-600 WPSI)
3" x 100 ft. coupled with Dixon brand fittings	35379866	(N3)
3" x 50 ft. coupled with Dixon brand fittings	35379874	(N3)
3" x 25 ft. coupled with Dixon brand fittings	35387471	(N3)
4" x 25 ft. coupled with Dixon brand fittings	35387943	(N3)
4" x 50 ft. coupled with Dixon brand fittings	35387950	(N3)

CAUTION: THE APPLICATION SHOULD NOT EXCEED THE ESTABLISHED TEMPERATURE RATING OF AIR HOSES. ALWAYS INSPECT AIR HOSES FOR DAMAGE BEFORE USE. ALL WORN OR DAMAGED AIR HOSES SHOULD BE REPLACED IMMEDIATELY.

All hose assemblies are furnished with Safety Lanyards. Hose assemblies with Bolt Type clamps are furnished with Safety Lanyards and Safety Clips.

Bulk Air Hose is available on the 300 psi hose. Each reel contains 600-700 ft.

Part # – 35370824 – Unit of measurement is 1 ft. x 3/4”.

Also available: Goodall L91 bulk Air hose - 3/4”. Part # 35393990.


Sold by the foot. 300 WPSI.

Size	Part #	Length	WPSI	Coupling Specifications
3/4”	35370832	50	300	Dixon Fittings with Bolt Type Clamps
3/4”	35394006	50	300	Universal Fitting with Band Type Clamps (Construction Yellow)
3/4”	35370840	100	300	Dixon Fittings with Bolt Type Clamps
3/4”	35370865	100	300	Dixon Fittings with Bolt Type Clamps
3/4”	35378181	50	300	Dixon Fittings with Bolt Type Clamps
1”	36892313	50	200	Dixon AM-11 Couplings with Double Band Clamps
1”	36891018	100	200	Dixon AM-11 Couplings with Double Band Clamps

Lay Flat Hose


Doosan is now offering a 3/4” Lay Flat air hose. This hose is light weight and requires no hose reels. Lay Flat air hose can withstand temperatures from -30°F to 180°F.

- ◇ Easy to move
- ◇ Easy to store
- ◇ Light weight
- ◇ 325 wpsi with 5:1 burst ratio
- ◇ No hose reels required
- ◇ Immediate recognition if hose is under pressure
- ◇ Competitively priced
- ◇ 3/4” hose available in 50’, 100’, or bulk lengths

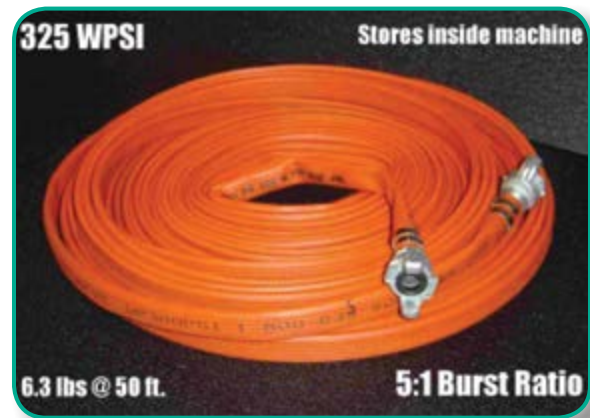


Hose	Part #
Lay Flat 3/4” X 50’	54660121
Lay Flat 3/4” X 100’	54660139

Air Hose Fittings



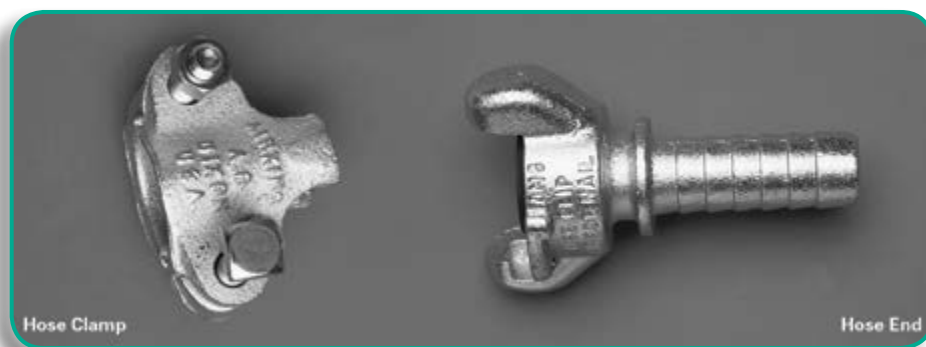


Dixon Number	Size	Description	Part #	Dixon Number	Size	Description	Part #
AM1	1/2"	Hose Ends	35379072	AM28	2"	Female NPT Ends	35379213
AM2	1/2"	Male NPT Ends	35221910	AWR4	Rubber Washers	35370170	
AM3	1/2"	Female NPT Ends	35379148	AC1	Safety Clips	35379080	
AM5	5/8"	Hose Ends	35379155	A4	1/2"	Bolted Clamps	35379114
AM6	3/4"	Hose Ends	35233220	A10	7/8"	Bolted Clamps	35379122
AM7	3/4"	Male NPT Ends	35233014	A14	1"	Bolted Clamps	35379130
AM8	3/4"	Female NPT Ends	35225945	BU29	2"	Clamp	36891844
AM9	3/4"	Clamp	35325976	GF81	2"	CPLG	36891851
AM11	1"	Hose Ends	35379163	B35	3"	Clamp	36891869
AM12	1"	Male NPT Ends	35367028	GF111	3"	CPLG	36891877
AM13	1"	Female NPT Ends	35323633	GF141	4"	CPLG	36891885
AM16	1 1/4"	Hose End	35379171	BS49	4"	Clamp	36891893
AM18	1 1/4"	Female NPT Ends	35225655	ACL - 8	Lanyards	35379098	
AM21	1 1/2"	Hose End	35379189				
AM23	1 1/2"	Female NPT Ends	35379205				
AM26	2"	Hose Ends	35379197				

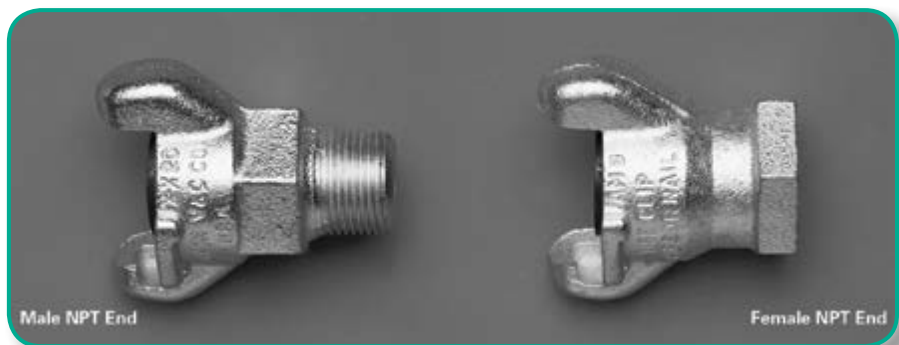


HITCH ADAPTERS

Item	Description	Part #
1	Body	Not sold separately
2	Flange bolt	35131440
3	Lock washer	95081808
4	Hex nut	95084778
5	Loop handle nut	35131457
6	Bolt	35131465
7	Lock washer	95081790
8	Spring	35131481
9	Lip	35131499

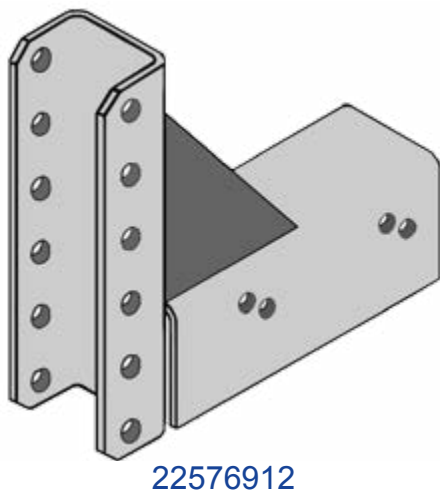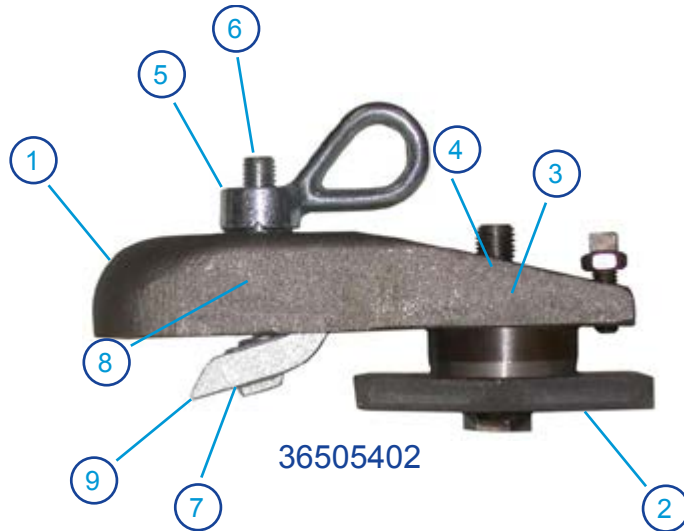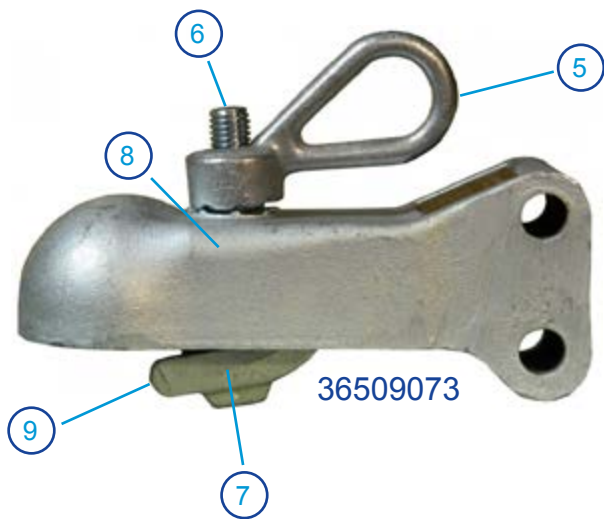


SAFETY LANYARDS & CLIPS

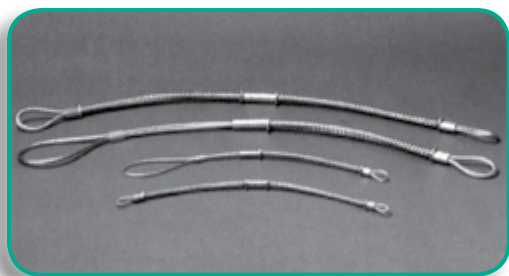

35382076*	Dixon WA2 Whip Check-Cable
	Hose to Hose ¼H Cable
	For 1 ½F to 3 hose
	Sizes- 38" Long
35382092*	Dixon WSR2
	Hose to Tool Service ¼H Cable
	For 1 ½F to 3 Hose
	Sizes- 38" Long
35382068*	Dixon WB1 Whip Check-Cable
	Hose to Hose, 1/8" Cable
	For ½F to 1 ¼ Hose
	Sizes- 20 ½S Long
35370808	Dixon AC1 Safety Clip
35382050	Dixon AC7 Stainless Steel Safety Clip
35379098	Dixon ACL8 Lanyard
35382084	Dixon WSR1
	Hose to Tool Service 1/8" Cable
	For 1/2F to 1 ¼ hose
	Sizes- 20 ¼S Long

*** THESE WHIP CHECK-CABLES ARE DESIGNED TO RESTRAIN HOSES RATED >200 PSI.**

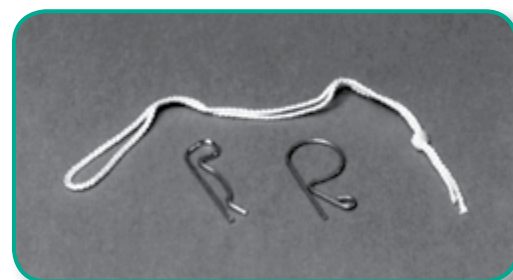

PAINT

Color	Container Size	Part #
Beige Standard Spray	16 oz.	35304286
Beige Standard	1 Gallon	35323567

Doosan Logo		
Part #	X	Y
46573919	8.0	1.1
46573920	12.0	1.6
46573921	18.0	2.4
46573922	24.0	3.2
46573923	32.0	4.3
46573924	45.0	5.8
46573925	55.0	7.1

DOOSAN

DoosanPortablePower.com

Doosan Web Site			
Part #	Description	X	Y
46556139	Black	12.0	1.14
46573899	Black	18.0	1.5
46556137	Black	22.0	1.73
46556138	White	22.0	1.73
46554780	Black	33.0	2.35



Doosan Boxes		
Part #	X	Y
46573863	4.0	1.9
46573859	8.0	3.7
46573860	12.0	5.6
46573861	18.0	8.4
46573862	24.0	11.2





SECTION 2

Airends

To help ensure warranty, these measures should be followed:

Airend Replacement Precautions

When replacing any airend with either a new or rebuilt airend, it is essential that certain precautionary measures be taken before, during, and after installation- **no matter what the reason for the failure.**

I. Before Replacement Airend Is Installed:

- A. Drain the entire lubrication oil system completely.
- B. Remove the old oil filter element. Discard.
- C. Flush all components in the system separately; i.e. valves, switches, manifolds, piping and/or hose, oil cooler and separator tank. If necessary, remove component, flush, and replace if either inner or outer covering is visibly damaged.
- D. Check condition of all compressor airend oil hoses and replace if either inner or outer covering is visibly damaged.
- E. Replace separator element.

II. During Installation

- A. Take every precaution to prevent foreign material of any kind from entering any opening of the installed airend. If at all possible, the airend should be replaced in dust and moisture-free surroundings.

III. After Installation

- A. Install new oil filter.
- B. Refill system with recommended oil. Use Doosan Pro-Tec™ Fluid for machines designed to operate at 300 psi and below. Use Doosan XHP fluids for machines designed to operate at >300 psi. Proof that Doosan Protective lubricants and filters have been used for the life of the airend is required when submitting warranty claims for extended coverage.
- C. Pour one gallon of oil into intake to aid lubrication on initial start up. (This applies to screw airends only.)
- D. Run unit for one hour. Replace oil filter element.
- E. Replace oil filter element again after initial 50 and 150 operating hours and thereafter every 500 operating hours.
- F. Resume normal maintenance.

Airend Exchange Program Objective

The objective of the airend exchange program is to provide a variety of solutions to our customers and promote the sale of Doosan re-manufactured airends with competitive advantages:

Quality:	Re-manufactured airends are built by trained and certified craftsman.
Reliability:	All airends are built to original factory specifications with OEM parts.
Performance:	All airends are upgraded with newest technology to ensure optimum performance.
Availability:	Best in the industry.
Warranty:	5 year extended warranty available. Second to none.
Support:	Aftermarket parts and service support.

The airend exchange program is a three-tier solution structure. When an airend needs to be replaced, the customer has three alternative solutions:

1. New Airend
2. Re-manufactured Airend
3. Airend Rebuild Kit

This option may be less money short term, but only parts are covered for 6 months. Order a genuine factory rebuild for peace of mind and optimum airend performance.

Doosan Warranty

Doosan will exchange any used airend, including a non-Doosan airend, for a re-manufactured or new airend regardless of condition of the returned airend. Doosan will not accept a core if it has flashed.

A) Doosan Airends:

- 1) Standard Warranty on new Doosan airends is two years or 4000 hours of operation.
- 2) Standard Warranty on re-manufactured Doosan airends is two years or 4000 hours of operation.
- 3) Extended Warranty of 5 years or 10,000 hours of operation is available on new and re-manufactured Doosan airends provided the following conditions are met:
 - ◇ Continued use of Doosan genuine lubricants, filters and parts
 - ◇ Compressor maintenance is performed at prescribed scheduled intervals
 - ◇ Proper installation of airend

B) Competitive (Non-Doosan) Airends:

- 1) Standard Warranty of 1 year or 2000 hours of operation.
- 2) Extended Warranty of 5 years or 10,000 hours of operation is available on re-manufactured non-Doosan airends provided the following conditions are met:
 - ◇ Continued use of Doosan supplied filters and fluids for non-Doosan airends
 - ◇ Compressor maintenance is performed at prescribed scheduled intervals
 - ◇ Proper installation of airend

C) 6 months standard parts warranty on Doosan airend rebuild kits.

Return of Used Airends

- ◇ US and Canada, all used airends must be returned to Doosan Portable Power, Statesville, NC.
- ◇ Latin America, used airends, at Doosan discretion, can be either returned to closest Doosan location or held at distributor location.
- ◇ Asia-Pacific, used airends, at Doosan's discretion, can be either returned to Doosan Singapore within 60 days from date of order, or held at distributor location.
- ◇ Doosan Distributor / Equipment Store can place order directly on Smart Equip for replacement airend. The order must contain the returned airend serial number.
- ◇ Returned airend must be tagged with the core return number (ex. CO12345) and shipped prepaid to the factory.
- ◇ Warranty registration cards are shipped with each rebuilt exchange airend. These must be filled out and returned or faxed to the Field Service Department.
- ◇ Do not seek an exchange airend to satisfy a warranty claim. Contact a Field Service representative to process your warranty claim.
- ◇ Doosan reserves the right to ship new or rebuilt airends to satisfy both warranty claims and exchanges.
- ◇ Drive coupling are not included with airends in this program.
- ◇ Airends will be shipped collect or prepaid, with charges added to the invoice.
- ◇ Doosan will not accept a core if it has flashed.

Contact the Field Service Department at Doosan Portable Power if you have any questions concerning warranty of an airend.

Extended Warranty Program

Doosan Portable Power offers extended warranty coverage on new and rebuilt airends when Doosan Protective lubricants and filters are used. The customer must agree to perform maintenance on the compressor airend according to the Doosan recommendations. Contact a Customer Service Representative for more details.

Customer must have airend serial number when placing orders

For more information call 800.633.5206

AIREND EXCHANGE PROGRAM PARTS LIST

Model	Product Code*	MM Size	New Part #	Rebuilt Part #	Weight (approx lbs)	Notes
Airend		178.5	39234059			
Airend, Bare No Gears H-Green		85	42476093		110	
Airend, 3.333UK		85	36007896		110	
Airend, HE127 1.407 Gr A/E	NR	127.5	46499307	44034585	250	
Airend, HE127 2.095 Gr A/E	NV	127.5	46499315	44034585	250	
Airend, HE127 1.03 Gr A/E	TB	127.5	46591800		250	
Airend, Assy		CD26	54434147			
Airend, Assy	HJ	CF90	36058832	36054088		
Airend, Assy	HXB	CF90	23039167			
Airend, Assy Special		178.5	36018042			
Airend, Assy PBA		178.5	36011534			
Airend, Assy PBA		178.5	36010643			
Airend, Assy PBA R1.975 w/Tubing Fo		178.5	36044295			
Airend Assy, PBA 1.26GR		226	36075083		1370	
Airend, R1.378		226	36078731		1370	
Airend, Assy PBA R1.465		178.5	36084184			
Airend, Assy PBA R1.289		178.5	36084168			
A/E Ratio 1.163	MA	178.5	36084218	42665695		
Airend, Assy PBA R1.255		178.5	36083996	42665745		
A/E Ratio 1.289	ME	178.5	36084259	42665711		
Airend, Assy Std Bore	HR	100	39882766			
Airend, Assy PBA R1.355 Port		178.5	36084143	42665661		
A/E Assy PBA R1.488		226	36093953			
Airend, PBA R1.465		178.5	36083988	42665679		
A/E Assy PBA R1.548		226	36043503		1370	
Airend, G5 2.467		CF90	22281729			
A/E Assy PBA R1		226	36064228		1370	
Airend, Belt Drive		CE55	22465926			
Airend, Assy Belt Drive		CE55	23091564			
Airend, NK w/ Ratio 1.188		HR4	23164502			
Airend, NT w/ Ratio 1.188		HR4	46556205			

Model	Product Code*	MM Size	New Part #	Rebuilt Part #	Weight (approx lbs)	Notes
Airend, w/ Unloader and Oil Piping			36044337			
Airend w/ Unloader	WW-FQ	226	36064210	36049815		
DAMCO-625	G5	226	35066885	35356757	1200	
Nirvana	GZ	226	42476127	42593558	1300	
P90WIR	FCD	CE55	54564927	36058436	90	*
P100WW	A1, W4	100	35073253	35349752	190	
P100AWW						
P100WD						
P125WW						
P125AWW						
P125	KG	85	42533497	36066140	110	
P125BWJD	BS	85	36007870	36007219	110	
P135WIR						
P185WD						
P185AWD						
P130BWJD	BE, BS					
P130CWJD						
P130DWJD						
P175CWD						
P175DWD						
P130AWJDU	EK	85	42430918	36043594	110	
135 CFM, 100 PSIG	ND	85	22833107	42630517	110	
P160/2100	BG	85	36007854	36007201	110	
P175/2300						
P160BWIR	MQ	85	42579409	42630475	110	
P175AWJDU	EL	85	42430926	36043602	110	
P1851WJDU						
P185BWIR	MU	85	42579417	42630483	110	
P185WJDU	CM	100	36015014	36019974	230	
P100BWW	Q4, W7, X4	100	35089366	35085661	190	
P100WF						
P100AWF						
P125BWW						
P125WF						
P100BWF	BF	85	36007839	36007193	110	
P100WJD						
P100EWD						
P100FWD						
P110WIR						
P125BWF						
P125EWD						
P125FWD						

* = No serial code is on the older P90 airends.

Model	Product Code*	MM Size	New Part #	Rebuilt Part #	Weight (approx lbs)	Notes
P130WD						
P125/2300						
P100AWD	J5, W8, X5	100	35089382	35356658	190	
P100BWD						
P100CWD						
P110AWD						
P110BWD						
P110CWD						
P100DWD	AE	85	36007888	36007185	110	
P125DWD						
P100WFD	X6	100	35089374	35356666	230	
P100WJDU						
P125WFD						
P125WJDU						
P175WJDU						
P125WD	A6	100	35073030	3534729	230	
P125AWD						
P150AWW						
P150WW						
P150WD						
P150AWD						
P160WW						
P160AWW						
P175WW						
P175AWW						
P175WD						
P175AWD						
P160/2300						
P175/2500						
P185WW						
P185AWW						
XP175AWJD	S9, W5, X6	100	35089374	35356666	230	
XP175BWJD						
P125WJD	X7	100	35089390	35356674	230	
P185/2100						
P125AWJD						
P130WJD						
P130AWJD						
P185WJD	P7, W6, X7	100	35089390	35356674	230	New Style
P185AWJD						
P185BWJD						
P185WJD	C1	100	35073048	35349737	230	Old Style
P185AWJD						

Model	Product Code*	MM Size	New Part #	Rebuilt Part #	Weight (approx lbs)	Notes
P125WD	P6, W5, X6	100	35089374	35356666	230	
P125AWD						
P125BWD						
P150WJD						
P150AWJD						
P150WW						
P150AWW						
P150BWW						
P150WD						
P150AWD						
P150BWD						
P160WW						
P160AWW						
P160BWW						
P160WFU						
P160WJD						
P160WJDU						
P160AWJD						
P175/2500						
P175WW						
P175WFU						
P175BWW						
P175WD						
P175AWD						
P175BWD						
P185WW						
P185AWW						
P185BWW						
VHP300WIR	JU	CE128	42514521	36065977	890	**
HP450WIR	LG	CE128	22187660	42593483	890	**
VHP300WIR	LH	CE128	22187652	42593491	890	**
P425WIR	JQ	CE128	42514489	42593509	890	**
P230	KD	CF90	54523899	36066165	250	
P230/125	F1, Z6, BN, CN	127.5	36017317	36021319	250	
HP300WCU	BZ	178.5	36010791	36014066	770	
HP300AWCU						
HP300BWCUC						
HP300WJD						
HP290	J3, T2	178.5	35085067	35356682	770	
VHP300WD						
VHP300AWD						
P375WD						

** = Discontinued, see note on CE128 airends at end of this section.

Model	Product Code*	MM Size	New Part #	Rebuilt Part #	Weight (approx lbs)	Notes
P375AWD						
VHP300AWIR	KZ	CE128	22176853	N/A	890	**
XP375AWIR	KX	CE128	22176853	N/A	890	**
HP375AWIR	KY	CE128	22176846	N/A	890	**
P425AWIR	KW	CE128	22176812	N/A	890	**
HP450AWIR	ML	178.5	36084325	42593467	770	
HP450WCU;AWCU	Z5	178.5	35094440	35099183	770	
P365/150						
VHP400AWIR	MN	178.5	36084333	42593475	770	
HP320	S7	178.5	35086131	35088525	770	
P335	A3, T5	178.5	35085091	35349224	770	
PCD350/1800	M7,EY	350	42441279	35085919	4900	
PCD350/2200	AK,EU	350	42441303	35099266	4900	
PCD350/2600	CR,EX	350	42441287	36020048	4900	
PCD350/2600	DH,EW	350	42441295	36038990	4900	
HP365WIR	JT	CE128	42514513	36065985	890	**
P375WCUA	BY	178.5	36008761	36014074	770	
BWCU						
P375WJD						
HP375AWD	AD	178.5	35097096	36007235	770	
XP400AWD						
P425AWD						
HP375WD	JS	178.5	42514505	36065993	770	
XP375WIR	JR	CE128	42514489	36066017	890	
VHP400WCU	CS	178.5	36018059	36019982	770	
VHP4400AWCU						
P425WGM	A4, T4	178.5	35085075	35356690	770	
P450WCAT						
HP425WCAT	P8, T3	178.5	35085075	35356690	770	
HP450WCAT						
HP525WGM	B8	226	35048719	35349307	1235	
HP525AWGM	E8	226	35082205	35349598	1235	
HP525BWGM						
HP525CWGM						
HP525WCU	A7	26	35044023	35349133	1235	
DXL600A;B(GM)	F2	226	35082023	35085679	1350	
DXL600A (CAT)						
DXL600AH (CAT)						
DXL600H (CAT)	J4	255	35071950	35356716	1545	
DXL600H (GM)	52	255	35022805	35348903	1545	
DXL600AH;BH (GM)	F3	226	35082221	35349646	1350	
HP600A;BWGM	D1	226	35082288	35349406	1350	
HP600A;BWCU	C6	226	35097062	35349414	1235	

** = Discontinued, see note on CE128 airends at end of this section.

Model	Product Code*	MM Size	New Part #	Rebuilt Part #	Weight (approx lbs)	Notes
HP600CWCU	CW	226	36020758	36022762	1235	
HP600WJD						
HP600CWCU(WW)	FY	226	42437558	36049716	1235	
HP600WJD (WW)						
P600	A0	226	35098235	35099217	1200	
XP600WGM	A8	226	35048727	35349315	1235	
XP600A;B;CWGM	D8	226	35082213	35349570	1235	
XP600WCU	C6	226	35097062	35349414	1235	
XP750;A;BWGM						
XHP600SCAT	S8	HR2	35086339	35088640	2140	
XHP650;AWCAT	S1	HR2	35086347	35088657	2140	
P700WGM	B9	226	35048735	35349323	1235	
P700A;B;CWGM	E9	226	35082197	35349604	1235	
P700WCU	B3	226	35082346	35349158	1235	
DXL700A;B (GM)	F4	226	35082270	35349638	1350	
DXL700A (CAT)	F4, P1	226	35080522	35085695	1350	
D750; XHP750WCU;	48,86,G1,J8	226 / 163	35078252	35349703	1550	N/A
D750S			35078849	35349380		
DXL70(XL-1) (GM)	55	255	35114958	35349877	1545	@
DXL70(XL-02) (GM)	55	255	35019611	35348812	1545	@
DXL750CAT	55	255	35051689	35349463	1545	
DXL750A;BWGM	F5	226	35082254	35349650	1350	
DXL750A(CAT)	F5, P2	226	35082254	35349653	1350	
P750	AN	226	35098227	35099225	1200	
XHP750SCAT	S1	HR2	35096205	35099100	2140	
XHP750;AWCAT	AA	HR2	35096205	35099100	2140	
HP675DWCU (WW)	FW	226	42437566	36049724	1370	
XP750CWCU (WW)						
XP750/XP750 ORION		226	36075067			
XP750BWCU	R9	226	35094135	35085703	1370	
P750WGM						
P750;AWCU						
HP750H;AWCU						
XP750CWCU	CX	226	36020766	36022770	1370	
XP750WJD						
HP750BWCU	CD	226	36011997	36020014	1370	
HP750CWCU	DB	226	42407064	36038925	1370	
HP750WJD						
HP750CWCU(WW)	FU	226	42437574	36049732	1370	
HP750CWCU(WW)						
HP750DWCU						
XP750DWCU(WW)						

N/A = Not Available

@ = See Footnote 2 at end of Parts Listing

Model	Product Code*	MM Size	New Part #	Rebuilt Part #	Weight (approx lbs)	Notes
HP750WJD(WW)						
VHP750WCAT	FH	226	36046886	36047595	1370	
VHP50WCAT	FR	226	42455352	36049740	1370	
VHP750AWCAT (WW)						
VHP750WCU (WW)						
XP825;A;BWCU	S3	226	35097070	35085711	1370	
XP825CWCU	DA	226	42407072	36038933	1370	
XP825WJD						
VHP750WCU	FV	226	42437582	36049757	1370	
VHP750BWCAT						
XP825CWCU (WW)						
XP825DWCU (WW)						
XP825WJD (WW)						
XHP825;AWCAT	S2	HR2	35086354	35088665	2140	
XHP825CM(1850)						
XHP825CMH(1850)						
XHP900CMH(2100)						
HR2-900						
XHP825CMH(2100)	X8	HR2	35089879	35091172	2140	
HR2-825						
HP825A;B;CWCU	CE	226	36012003	36019990	1370	
HP825DWCU	FF	226	36046456	36047579	1370	
HP825DWCU (WW)	FL	226	42437590	36049765	1370	
MHP825WCU						
MHP825WCAT						
VHP825WCU (WW)						
VHP850WCAT (WW)						
VHP850AWCAT (WW)						
VHP825WCU	FB	226	36043461	36047546	1370	
VHP850WCAT						
P850;A;VWGM	D2	226	35082304	35349422	1370	
HP850;A;BWGM	D3, 57	255	35019660	35348820	1545	
DXL850 (GM)	57	255	35019660	35348820	1545	
DXL850H (GM)						
DXL850A;B (GM)	F6	226	35082247	35349661	1350	
DXL850 (CAT)	F8	255	35064906	35349687	1545	
DXL850A (CAT)	P4	226	35081488	35085729	1350	
DL900	61	250	72056385	35348580	1600	
EL900	61	250	N/A	35348325	1600	
EXL900	70	255	35019835	35348846	1545	
DXL900 (XL-1)	60	255	35114982	35349885	1545	@
DXL900 (XL-2)	60	255	35019710	35348838	1545	@
XP900;A;BWGM						

@ = See Footnote 2 at end of Parts Listing

Model	Product Code*	MM Size	New Part #	Rebuilt Part #	Weight (approx lbs)	Notes
P900	AM	226	35098219	35099233	1200	
XHP900SCAT	AG	HR2	35097468	35099118	2140	
XHP900;AWCAT						
XP900A;B;CWCU	CG	226	36011112	36020006	1370	
XP900DWCU	FG	226	36046464	36047587	1370	
XP900DWCU (WW)	GS	226	42474270	36049773	1370	
HP915WCU (WW)						
P900;A;BWCU	S4	226	35097088	35085737	1370	
HP900WCAT	FJ	226	36046894	36047603	1370	
HP900WCAT (WW)	FS	226	42455360	36049781	1370	
HP900AWCAT (WW)						
XL900	T1	255	35087063	35088590	1545	
HP935WCU	FA	226	36043479	36047553	1370	
HP935WCU (WW)	FP	226	42455337	36049799	1370	@
P950						
XP950WCAT	FT	226	42455378	36049807	1370	
XP1000WWCU (WW)						
XP1000WCAT (WW)						
XP1000WCAT	FK	226	36046902	36047611	1370	
HP1000A;B;CWCU	AH	285	35097450	36000909	2910	
HR2-1050	BH	HR2	36001535	36006104	2140	
P1050	FZ	226	42464768	36049930	1370	
P1050	DR	226	42427559	36038966	1370	
XP1050WCU	EZ	226	36043487	36047561	1370	
XP1050WCU (WW)	FQ	226	42455345	36049815	1370	
XP1060WCAT						
DXL1050	58	255	35022300	35348895	1545	
XHP1070WCAT	BV, CQ	HR2.5	36017549	36020055	2140	
XHP1070AWCAT	CQ	HR2.5	36017549	36020055	2140	
XP1070SCAT						
XHP1170WCAT	HN	HR2.5	54637905	36066025	2140	
XHP1170WCU						
P1100;A;BWGM	D5, 70	255	35019868	35348853	1545	
DXL1100	70	255	35019868	35348853	1545	
DXL1100H						
DL1200	67	250	31358237	35348564	1600	
EL1200	67	250	35338953	35348309	1600	
EXL1200	65	255	35002864	35348747	1545	
DXL1200 (XL-1)(1800)	74	255	35115013	35349893	1545	@
DXL1200 (XL-1)(2100)	74	255	35115013	35369792	1545	@
DXL1200 (XL-2)	74	255	35019918	35348861	1545	@
DXL1200 (CAT)	74	255	35019918	35348861	1545	
DXL1400	72	255	35022045	35348879	1545	

@ = See Footnote 2 at end of Parts Listing

Model	Product Code*	MM Size	New Part #	Rebuilt Part #	Weight (approx lbs)	Notes
P1200	GL	226	42470781	36049948	1370	
XP1200A;B;CWCU	Z9	285	35095033	35099126	2910	
XL1200	U2	255	35088202	35088608	1545	
HP1300;AWGM	C7	285	35051127	35349430	2910	
HP1300BWGM	U8	285	35088350	35089895	2910	
HP1300;A;B;CWCU	Z8	285	35095025	35099134	2910	
P1300A;B;CWCU	Z8	285	35095025	35099134	2910	
EXL1400	M5	255	35080209	35085901	1545	
XL1400	S5	255	35085505	35088616	1545	
XP1400;AWGM	C8	285	35051135	35349448	2910	
XP1400BWGM	U7	285	35088343	35089903	2910	
XP1400;A;BWCU	Z7	285	35095017	35099142	2910	
P1600;AWGM	C9	285	35051143	35349455	2910	
P1600BWGM	U6	285	35088335	35089911	2910	
HP1600CWCU	Z2	285	35092014	35099159	2910	
HP1600;A;BWCU						
D1750	75	330 / 275	35002591	35348739	5260	N/A
D2000	80	330 / 275	35002419	35348721	5260	N/A
E2100	81	330 / 275	35008143	35348754	5260	N/A
D2300	85	330 / 275	35011311	35348770	5260	N/A
PTO-85MM	HP	85	54403670	36054096	110	
PTO-85MM	GJ	85	42470260	36049823	110	
PTO-5	27	127.5	35043355	35349109	285	
PTO-7-260	29	178.5	35036235	35348929	780	
PTO-7-330	28,06	178.5	35044684	35349190	780	
PTO-9-450	26, 07, 01	226	35082338	35349539	1210	
PTO-9-600	24, 08, 02	226	35082338	35349539	1210	
PTO-9-750	22, 03	226	35082320	35349554	1210	
PTO-750 / 250-2100	34, K2	226 / 163	35078237	35349372	1770	N/A
PTO-750 / 250-1800	23, K1	226 / 163	35078245	35349299	1770	N/A
OBP Cat 1 Ford	GXU	CF75D8	22637219	N/A	210	
OBP Cat 3						
OBP Cat 2	HAA	CF75G	22234595	N/A	120	
OBP Cat 1 Belt-Drive	FCD	CE55RW	54564927	N/A	50	
OBP Ct 1 Ford	HWZ	CF90D3	22643043	N/A	210	
OBP Cat 2 Ford						
HP185CMH	JM	85	36052736	36066041	110	
VHP30CMH (recip)	TS10	Recip	16545006	N/A	50	
VHP40CMH (recip)						
VHP90CMH	HL	CE55G	54629563	N/A	90	
OBP Cat 1						
P250CWJD	HJ	CF90	54390943	36054088	250	
P250WIR						

N/A = Not Available

Model	Product Code*	MM Size	New Part #	Rebuilt Part #	Weight (approx lbs)	Notes
P260WIR						
VHP200CMH						
VHP300CMH						
VHP300/200						
XP525WCU;AWCU	Z4	178.5	35093665	35099191	770	
P600WIR						
VHP400CMH						
VHP500CMH						
VHP550CMH						
VHP500/200						
P600/125						
P600WCU;AWCU	BX	178.5	36010254	36014082	770	
VHP550CMH						
HP600CMH						
XP650CMH						
P600/110						
XHP650CM (1850)	S1	HR2	35086347	35088657	2140	
XHP650CMH (1850)						
XHP750 (2100)						
XHP750CM	JY	HR2	36052215	36066058	2140	
XHP750CM (2100)	JW	HR2	36051381	36066066	2140	
XHP750CMH (1850)	AA	HR2	35096205	35099100	2140	
XHP900CM (1800)	KA	HR2	36052231	36066082	2140	
XHP900CM(2100)	JZ	HR2	36052223	36066090	2140	
PCD1400	FX	285	42467597	36049955	2910	
PCD1600	AQ	285	35098052	35099258	2910	
PCD1600	AT	285	36000693	36006070		
PCD1900	BJ	285	36001543	36006096	2910	
PCD3800	HF	2 x 285	42477851	36054104	6400	

Compressor Modules

Model	Serial Code	MM Size	New Part #	Rebuilt Part #	Weight (approx lbs)	Notes
HXP825CM (1850)	S2	HR2	35086354	35088665	2140	
XHP825CMH (1850)						
XHP800CMH (2100)						
XHP825CM (2100)	JX	HR2	36052868	36066074	2140	
XHP825CMH (2100)	X8	HR2	35089879	35091172	2140	
XHP900CM (1800)	KA	HR2	36052231	36066082	2140	
XHP900CM (2100)	JZ	HR2	36052223	36066090	2140	
XHP900CMH (1800)	AG	HR2	35097468	35099118	2140	
XHP1070CM (1800)	JP	HR2.5	36052710	36066108	2140	
XHP1070CM (2100)	JN	HR2.5	36052728	36066116	2140	
XHP1070CMH (1800)	CQ	HR2.5	36017549	36020055	2140	

Model	Serial Code	MM Size	New Part #	Rebuilt Part #	Weight (approx lbs)	Notes
XHP1070CMH (2100)	CV	HR2.5	36020519	36020964	2140	
XHP1250CM	KU	HR2.5	36069243	42593525	2140	

Oil Field Rigs & Specialized Applications

Model	Serial Code	MM Size	New Part #	Rebuilt Part #	Weight (approx lbs)	Notes
P100	BR	85	36007847	36066124	110	
P275	FC	127.5	43204536	36049831	250	
P300	FD	127.5	42452722	36049849	250	
VHP300 / 200	HJ	CF90	54390943	36054088	250	
P330	EP	178.5	36032936	36049856	770	
P350	HQ	178.5	36051787	36066132	770	
P375	GK	178.5	3604526	36049864	770	
VHP500 / 200	Z4	178.5	35093665	35099191	770	
P520	CS	178.5	36018059	36019982	770	
NIRVANA	GZ	226	42476157	42593558	1300	
P600	EN	226	42431999	36049872	1370	
P750	DS	226	39865407	36038941	1370	
XHP750 / 350	S1	HR2	35086347	35088657	2140	
P780	DU	226	42429241	36039386	1370	
P850	EM	226	42431981	36049880	1370	
P900	FS	226	42474270	36049773	1370	
P950	DJ	226	36032084	36038958	1370	
P950	FP	226	42455337	36049799	1370	
P1050	DR	226	42427559	36038966	1370	
P1750	DT	226	36032381	36038974	2910	
P2200	JL	297 / 250	39849609	36066033	3800	
XHP	87, J9	226 / 163	325078195	35349695	1770	N/A
XHP	C3, K7, R1	255 / 204	35084433	35349505	2680	N/A
XHP	C4, K8, R2	255 / 204	35084441	35349471	2680	N/A
XHP	D6, K9, R3	255 / 204	35084458	35349810	2680	N/A
XHP	D9, L1, R4	255 / 204	35084466	35349588	2680	N/A
XHP	84, K6, Q9	255 / 204	35084425	35349273	2680	N/A
XHP	L3, L4, R6	255 / 204	35084482	35356727	2680	N/A
XHP	J7	285.178.5	35076314	35086818	4300	N/A
XL750	T7	255	35087824	35088582	1545	
XL900	60, H2	255	35085141	35085760	1545	
XL750	T7	255	35087824	35088582	1545	
XL900	T1	255	35087063	35088590	1545	
XL1050	70, H4	255	35085158	35085778	1545	
XL1050	W2	255	35088707	35091149	1545	
XL1200	74, H5	255	35085166	35085786	1545	
XL1200	U2	255	35088202	35088608	1545	

N/A = Not Available

Model	Serial Code	MM Size	New Part #	Rebuilt Part #	Weight (approx lbs)	Notes
XL1400	S5	255	35085505	35088616	1545	
EXL750	60, H2	255	35069210	35085794	1545	
EXL750 / 900	70, H4	255	35019835	35019835	1545	
EXL900	H3	255	35069228	35085810	1545	
EXL1050	74,H5	255	35028489	35085836	1545	
EXL1050	H6	255	35083898	35085844	1545	
EXL1050 / 1200	65	255	35022011	35085851	1545	
EXL1200	CA	255	36011211	36020030	1545	
EXL1200	H7	255	35069277	35085869	1545	
EXL1400	G7	255	35069244	35085877	1545	
EXL1400	M6	255	35080217	35085885	1545	
EXL1400	H8	255	35069285	35085893	1545	
EXL1400	M5	255	35080209	35085901	1545	
PCD1400	FX	285	42467597	36049955	2910	
PCD1600	AQ	285	35098052	35099258	2910	
HP450AWIR	ML	178.5	36084325	42593467	2910	
VHP400AWIR	MN	178.5	36084333	42593475	2910	
PCD1800	AS	285	36000883	36006088	2910	
PCD	BJ	285	36001543	36006096	2910	

Drill Rigs

Model	Serial Code	MM Size	New Part #	Rebuilt Part #	Weight (approx lbs)	Notes
P90 / 2300	X4	100	35089366	35085661	190	
P125	KG	85	42533497	36066140	110	
P230	JK	CF90	54523907	36066157	250	
P230	KD	CF90	54523899	36066165	250	
		CF90	54387758	46554128	250	
P160 / 2300	A6	100	35073030	35349729	230	
P125 / 2300	BF	85	36007839	36007193	110	
P160 / 2100	BG	85	36007854	36007201	110	
P175 / 2300						
P175 / 2500	A6	100	35073030	35349729	230	
P175 / 2500	P6, W5, X6	100	35089374	35356666	230	
P185 / 2100	X7	100	35089390	35356674	100	
P230 / 125	F1, Z6, BN, CN	127.5	36017317	36021319	250	
HP230 /130	P9, BP	127.5	36006013	35085943	250	
P275 / 150	CZ	127.5	36022150	36038982	250	
HP290	T2	178.5	35085067	35356682	770	
P300 / 200	AC	178.5	35096494	35099175	770	
P365 / 150	Z5	178.5	35094440	35099183	770	
P425 / 200	CS	178.5	36018059	36019982	770	
HP450 / 170	Y1	178.5	35090505	35091156	770	
P600 /100	Y3	178.5	35090653	35091164	770	

Model	Serial Code	MM Size	New Part #	Rebuilt Part #	Weight (approx lbs)	Notes
P600 / 110	BX	178.5	36010254	36014082	770	
P600 / 125	Z4	178.5	35093665	35099191	770	
DAMCO-275	G3	178.5	35066869	35356732	750	
DAMCO-450	G4	226	35066877	35356740	1200	
DAMCO-625	G5	226	35066885	35356757	1200	
P450	AP	226	35098243	35099209	1200	
P450 (WW)	GD	226	42464800	36049898	1370	
P600	A0	226	35098235	35099217	1200	
P600 (WW)	GC	226	42464792	36049906	1370	
P750	AN	226	35098227	35099225	1200	
P750 (WW)	GB	226	42464784	36049914	1370	
P900	AM	226	35098219	35099233	1200	
P900 (WW)	GA	226	42464776	36049922	1370	
P1050	AL	226	35098201	35099241	1200	
P1050 (WW)	FZ	226	42464768	36049930	1370	
P1200	GL	226	42470781	36049948	1370	
HP600-Garland	48, 86, G1, J8	226 / 163	35078229	35349828	1550	N/A
HP600-Cyclone	48, 86, G1, J8	226 / 163	35078203	35349562	1550	N/A
HP600- Clarksburg	48, 86, G1, J8	226 / 163	35078229	35349828	1550	N/A
HP750 (750cfm @ 2100rpm or 600cfm @ 1800rpm)						
	82, K5, Q8	255 / 204	35084417	35349026	2680	N/A
HP750 (electric drive, internal gears)						
	89, L2, R5	255 / 204	35084474	35356765	2680	@
HP750 (internal gears, for HL600 and gear box conversion) (Complete kit 35078369)						
	L5	226 / 163	35078377	35356773	1770	N/A
XHP750 (A/E only for 3 stage R600 conversion) (Complete kit 35078369)						
	87, J9	226 / 163	35078195	35349695	1770	N/A
HP900 (900cfm @ 2100rpm or 750cfm @ 1800rpm)						
	83, K4, Q1	255 / 204	35083500	35349794	2680	N/A
VHP1050	79, K3, Q7	255 / 204	35084409	35349802	2680	N/A
(internal gears)						
VHP1050	L7, R7, T8	255 / 204	35088038	35085752	2680	N/A
(series III) (for RD10)						
HP900 (50HZ)	P3, R8	255 / 204	35084508	35085745	2680	N/A
XL600	U3	255	35088277	35088574	1545	
XL7505	55	255	35019611	35088582	1545	
PCD3000	HG	2 x 285	42477869	36054112	6400	†
PCD3800	HF	2 x 285	42477851	36054104	6400	†
PCD3800 (1475RPM)	LL	2 x 285	42489542	42593426	6400	†
PCD2200 (1475RPM)	LM	2 x 285	42489559	42593434	6400	†
PCD2200 (1800RPM)	LN	2 x 285	42489567	42593442	6400	†
PCD350 / 1800	M7, EY	350	42441279	35085919	4900	

@ = See Footnote 2 at end of Parts Listing

N/A = Not Available

† = Used on Pit Viper Drill

Model	Serial Code	MM Size	New Part #	Rebuilt Part #	Weight (approx lbs)	Notes
PCD350 / 1800	M8, ET	350	42441311	35085924	4900	
PCD350 / 1600	M9, ES	350	42441329	35085935	4900	
PCD350 / 1600	W1, ER	350	42441337	35088624	4900	
PCD350 / 1600	U9, EQ	350	42441345	35088632	4900	
PCD350 / 2200	AK, EU	350	42441303	35099266	4900	
PCD350 / 2600	CR, EX	350	42441287	36020048	4900	
PCD350 / 2600	DH, EW	350	42441295	36038990	4900	
HR2-600-2300	Y9	HR2	35091057	35091180	2140	
HR2-600-2100	S8	HR2	35086339	35088640	2140	
HR2-750-2100	S1	HR2	35086347	35088657	2140	
HR2-825	X8	HR2	35089879	35091172	2140	
HR2-900	S2	HR2	35086354	35088665	2140	
HR2-1000	AJ	HR2	35097575	35099274	2140	
HR2-1050	BH	HR2	36001535	36006104	2140	
HR2.5-1250-2100	BV, CQ	HR.5	36017549	36020055	2140	
HR2.5-1050	CV	HR2.5	36020519	36020964	2140	
HR2.5-1150-2100	KC	HR2.5	42520700	36066173	2140	
HR2.5-1250-1800	DG	HR2.5	42420422	36039006	2140	
HR2.5-870-1850	KB	HR2.5	42535294	36066223	2140	N/A

Footnotes

1. The HL750 and XHP750 listed in the drill rig section are available only in the kits offered through Aftermarket. Airends can be purchased directly through the Airend Exchange program only upon "kit" airend failure.
2. XL-1 units are equipped with an unloader valve.
3. XL-2 units are equipped with a butterfly valve.
4. Airend prices are subject to change without prior notification.

N/A = Not Available

178.5mm Airend Piping Kits

For the following airend sizes and applicable airend serial codes, piping kits will be furnished with the replacement airends.

Model	Serial Code	Kit #
P300	A2	35089044
HP300	J3	35089036
HP320	S7	35089036
P335	A3	35089044
P375	J3	35089036
P425	A4	35089044
HP425	P8	35089044
P450	A5	35089044
HP450	P8	35089044

XL Airend Adapter Plates (255mm)

In the past, all XL airends were equipped with unloaders which called for a rectangular port hole on the rotor housing. Now, the butterfly valve is used and the airend has a round port hole. When ordering a replacement XL airend, the customer should inform the Customer Service Representatives as to which they have. In the event a customer is shipped the wrong style airend, adapter plates can be used to remedy the problem.

1. 35787647 – Customer has a machine with an unloader, but is shipped an airend with round port hole. This plate is needed to adapt airend
2. 35904226 – Customer has machine with butterfly valve, but is shipped an airend with a rectangular port hole. This plate is needed to adapt airend.
3. Below are the serial number breaks for XL units that went from XL-1 to XL-2 style housings.

Unit	Serial Number	Unit	Serial Number
DXL750	74208	EXL900	75473
DXL750S	74365	DXL1100	74207
DXL850	74373	DXL1100S	75197
DXL850S	75167	DXL1200	74427
DXL900	74436	DXL1200S	75133
DXL900S	74097	DXL1400	76700
DXLCU900	75327	DXLCA1200	77015
DXL1050	74172	EXL1200	77615

Oil Piping (General)

Another item of great importance when ordering a replacement airend is the method of oil line piping used on the particular unit. When installing your new or rebuilt replacement airend, *Never Guess* at the proper way to pipe the airend. If you are not certain of how the piping goes, contact Portable Power’s Field Service group.

1. 100 mm

In 1986, the above size airends changed from external oil piping to internal piping, utilizing the rotor and bearing housings’ ports. The airend serial codes changed as follows:

W7 to X4	W8 to X5	W5 to X6	W6 to X7
----------	----------	----------	----------

New style airends will be shipped with all necessary parts and drawings for this change.

Tapered Roller Bearings

1. HP600/D750/D750S (Phase 1)

As of November 1977, the HP600, D750, D750S airends (250 psi) were changed from contact ball bearings (Serial Code 48) to the new tapered roller bearing model (Serial Code 86). It should be noted that the new and old airends will interchange. Parts for the old style airend can be obtained but require additional lead time. The serial number break for the above was:

Portable Compressor – 100366
Airend – 3839U7786


2. HP600/D750/D750S (Phase 2)

In October of 1979, the tapered roller bearing changed to the Phase 2 tapered (Serial Code G1). The airends are interchangeable as complete units; many not interchangeable. Serial number break for the above was:

airend (Serial Code 86) was Code G1). The airends are of the detailed parts are break for the airend is

3. XL Airends

As of March 1978, the complete line of Airends (600CFM-1400CFM) went to tapered roller bearings. The airend serial number break was 6291U78. The airends are interchangeable as a unit but many of the detailed parts are not.

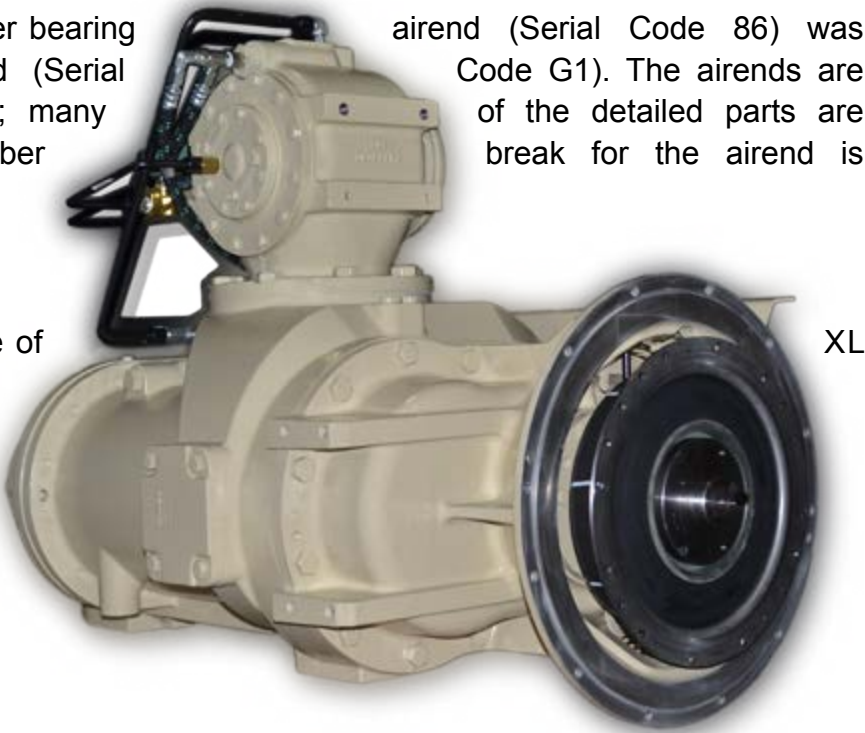

A kit is now available to change an old style ball bearing XL airend to the new tapered roller bearing model. The part number for the kit is 35583566.

4. P100/125/175/185

On the above unit sizes, the airends were changed to tapered roller bearings. Beginning with serial number 101836 or airend serial number 6554U78, the airends are the new style. The tapered style is the only one offered for sale. The units are interchangeable as a unit but some of the detailed parts are not.

5. High Pressure Airends (255/204 mm size)

These airends changed to tapered roller bearings in September 1983. There is not a serial number break, but the serial codes changed to signify the difference. The airends will interchange with the old style, but detailed parts may be different.

The following serial codes designate tapered roller bearings in the 255/204 design: Q1, Q7, Q8, Q9, R1, R2, R3, R4, R5, R6, R7, R8, T8.

Bearing Oil Cooler Kits

D750/D750S/XHP750/XHP750S

Beginning in November 1979, the above units had an airend change which required the use of a small bearing oil cooler to be used in conjunction with the airend. Serial number breaks for the units are as follows:

Unit serial number 113729 for the XHP750 line, and airend serial number 5453U79G1 for the D750 line.

Kit numbers:

- ◇ D750 – 35065325
- ◇ D750S – 35065143
- ◇ XHP750W – 35065283
- ◇ XHP750S – 35065291

Note: The customer must purchase these oil cooler kits with the above airends. There is no warranty on these airends unless the kit is installed and operating.

Note: The Field Service Department has approved the use of these airends without cooler kits if approved synthetic lubricant is used in the airend after installation.

High Pressure Airends

In January 1982, all high pressure airends (250 psi and above) went through extensive engineering changes. The airends took an o-ring seal between the housings along with o-ring hose fittings. The serial codes of the airends affected changed at this time. Airends will interchange as complete units but many of the parts will not.

HR-2 Over/Under Airends

1. This airend underwent a change in the oil pump area which affected the rotor set, oil pump, oil pump coupling and associated hardware. The serial number breaks were: 8661U85S2 and 9529U86S1
2. This airend also had a change in the front drive shaft area which affected the drive shaft, gear case, bearings, spacers and associated hardware. The serial number break was 9770U87S2.
3. The HR-2 Airends changed from a single lube filter arrangement (35367879) to a dual filter system (36860336). The serial number break was 3087U88 and XHP750SCAT S/N 170842.
4. All HR-2 Airends are furnished “less coupling.”
5. Steel tubing. Reference Technical Service Bulletin PC-8-011 for replacing steel tubing with flexible hoses.
6. Rotary Shaft Seal. Effective with airend serial number 9965U96, rotary seal 36865475 began to be used. This style is identified by an anti-rotation pin installed in the seal cover.

The previous design can be identified by an anti-rotation pin installed in the stationary member of the seal that matches a slot in the seal cover. This design also has a visible snap ring at the front of the seal cover.

CE128 Airends

In December of 2005, Portable Power discontinued the manufacturing of the CE128 to improve the efficiency of rotor manufacturing operations. The following field installable kits have been designed to continue the support of machines that use this discontinued airend:

Compressor	Compressor Model Serial Code	Discontinued A/E Serial Code	Conversion Doosan Kit Part #
HP450WIR	279	LG	44003853
VHP400WIR	289	LH	44003861
P425AWIR	081	KW	44003887
HP375AWIR	085	KY	44003895
XP375AWIR	080	KX	44003903
VHP300AWIR	086	KZ	44003911
P425WIR	060	Call for Assistance	
7/120WIR	065	Call for Assistance	
HP365WIR	062	Call for Assistance	
10/105WIR	067	Call for Assistance	

These kits include detailed instructions on how to convert a machine with a CE128 airend to a 178.5mm airend.

178.5mm and 226mm Airends

1. Both of these airends had a drive shaft change in 1988. The old style shaft used a snap ring for placement while the new style uses a clamping plate.
2. The 226mm airend changed rotor housing styles at serial number 7355U88C6.

This affected the housing and front and rear gaskets.

3. The 226mm airend changed front seal covers at 6173U88. This also changed the oil feed line from the gear case to its new location in the seal cover.

285mm Airends

1. Airends for the P1600BWGM family (airend serial codes U6, U7, U8) were originally built without oil pumps. To improve airend lubrication, oil pumps have been installed in some units in the field.
2. Effective 12/1/99 (serial number 0212U99), the rotor set and female inlet bearing changed. Airend serial codes did not change. Airends will interchange as complete units, but these individual parts will not.

350mm Airends

1. This airend had a change to the gear case, drive shaft and drive shaft bearing. New airend serial codes were released at the time of the change. An oil supply line at the gear case also changed.

AIREND SERIAL CODE LISTING

Below is the listing of Airend Serial Codes. They are in Serial Code sequence – for machine size sequence see Airend Exchange Program. If you are working with an airend serial code which does not show up on the above list, call a customer support representative at (800) 633-5206.

Serial Code	Description
01	PTO9 (450) TRB Metric
02	PTO9 (600) TRB Metric
03	PTO9 (750) TRB Metric
06	PTO7 (330) Metric B.B.
07	PTO9 (450) Metric B.B.
08	PTO9 (600) Metric B.B.
10	R85
11	RR85
12	RS85CW
13	RS85CCW
15	RB125
16	RS125CW
17	RS125CCW
21	R150/RA 125/140
22	PTO9 (750) B.B.
23	PTO750 H.P. (250 PSI)
24	PTO9 (620) B.B.
25	RR160
26	PTO9 (460) B.B.
27	PTO5
28	PTO7 (330) B.B.
29	PTO7 (260) B.B.
30	XL175
31	R175
32	L175
34	PTO750 H.P. (250PSI)
35	R250
40	R365
48	HP600/HL600 B.B.
50	R600
51	L600
52	XL600H
55	XL750
57	XL850
58	XL1050
59	XLCU900
60	XL900
61	L900

Serial Code	Description
62	XLCU900
65	EXL1200 (60 cycle)
67	L1200
70	XL1100/EXL900 (60 cycle)
72	XL1400
74	XL1200
75	L1750
79	1050/350 PSI
80	L2000
81	EL2100
82	HP750
83	HP900
84	XHP1150
85	L2300
86	HP600/HL600 TRB
87	XHP750
88	XHP950
89	HP750 (E.O.)
A1	P100, P100A (except for P100AWD)
A2	P300
A3	P335
A4	P425
A5	P450
A6	P175
A8	XP600GM
A9	XP600CU
AA	HR2-750 (1800 RPM)
AB	XP1100 (285)
AC	HP300 Drill
AD	XP400, HP375, P425AWD
AE	85mm P100DWD
AG	HR2-900/350 CAT
AH	HP1000WCU
AJ	HR2-1000
AK	PCD350 m/m 2200 (50 cycle)
AL	P1050 Drill
AM	P900 Drill
AN	P750 Drill

Serial Code	Description
AO	P600 Drill
AP	P450 Drill
AQ	P1600 Drill
AS	PCD1800 Drill
AT	PCD1600 Drill
B3	P700CU
B8	HP525GM
B9	P700GM
BE	85mm (replaced by BS)
BF	85mm-P100BWF
BG	85mm-P185CWJD
BH	HR2-1050
BJ	PCD1600 Drill
BL	P250JLB
BN	P250WJD
BP	200/130 Drill
BR	85mm-Cust. 1
BS	85mm-P130B, P175CWD
BT	D2500
BV	HR2.5-1250
BX	178.5mm-P600WCU
BY	P375WCU
BZ	HP300WCU
C1	P185WJD
C3	XHP1150
C4	XHP950
C6	XP750, XP600WCU
C7	HP1300GM
C8	XP1400GM
C9	P1600GM
CA	XL1200-50HZ
CD	HP750BWCU
CE	HP825A; BWCU
CF	90mm
CG	XP900A; BWCU
CM	P185WJDU
CN	P230 Drill
CQ	HR2.5-1250 redesign
CR	350mm-2600 CFM
CS	178.5mm-VHP400WCU
CV	HR2.5-1050
CW	HP600WJD; HP600CWCU
CX	XP750WJD; XP750CWCU
CZ	275CFM Drill
D1	HP600 (Portable)

Serial Code	Description
D2	P850
D3	HP850
D4	XP900
D5	P1100
D6	XHP1050
D8	XP600AWGM
D9	XHP1150
DA	XP825WJD; XP825CWCU
DB	HP750WJD; HP750CWCU
DG	HR2.5-1250/1800 RP M
DH	350MM-2600CFM
DJ	950CFM/O.F./226 mm
DR	1050CFM/O.F./226 mm
DS	750CFM/O.F./226 mm
DT	1750CFM/O.F./285 mm
DU	780CFM/O.F./226 mm
E8	HP525AWGM
E9	P700AWGM
EK	P130AWJDU
EL	P175/185AWJDU
EM	P850 Cust.1
EN	P600 Cust.1
EP	P330 Cust.1
EQ	350 mm/1600
ER	350 mm/1600
ES	350 mm/1600
ET	350 mm/1800
EU	350 mm/2200
EW	350 mm/2600
EX	350 mm/2600
EY	350 mm/1800
EZ	XP1050WCU
F1	P250, P250A
F2	DXL600A
F3	DXL600AH
F4	DXL700A
F5	DXL750A
F6	DXL850A
F8	DXL850CAT
FA	HP935WCU
FB	VHP825/850
FC	P275 Cust.1
FD	P300 Cust.1
FF	HP825DWCU
FG	XP900DWCU

Serial Code	Description
FH	VHP750WCAT
FJ	HP900WCAT
FK	XP1000WCAT
FL	226mm-HP825/850
FP	HP935WCU
FQ	XP1050WCU
FR	VHP750WCAT
FS	HP900WCAT
FT	226mm-XP1000WCAT
FU	226mm-HP750
FV	226mm-XP825
FW	226mm-XP750CWCU
FX	PCD1400 Drill
FY	HP600
FZ	P1050 Drill
G1	HP600/HL600
G3	DAMCO 275
G4	DAMCO 450
G5	DAMCO 625
G7	EXL1400 (60 cycle)
G9	DXL525AH
GA	P900 Drill
GB	P750 Drill
GC	P600 Drill
GD	P450 Drill
GJ	85 mm PTO
GK	P375 Cust.1
GL	P1200 Drill
GS	226mm-P900 Cust.1
H1	EXL600 (60 cycle)
H2	XL900
H3	EXL900 (50 cycle)
H4	XL1050
H5	XL1200
H6	EXL1050 (50 cycle)
H7	EXL1200 (50 cycle)
H8	EXL1400 (50 cycle)
HB	85 mm PTO
HF	Dual 285 mm - 3800
HG	Dual 285 mm - 3000
HJ	CF90/250
HN	HR 2.5; XHP1170 CU/CAT
HP6	00WCU
J3	P375
J4	DXLCA600H

Serial Code	Description
J5	P100WDMKII
J7	HR3
J8	HP600/HL600 Redesign
J9	XHP750 Redesign
JK	CF90 Drill
JL	297/250 Cust.1
JM	85mm Cust.1
JN	XHP1070CM-2100
JP	HR 2.5; XHP1070CM-1800
JQ	P425WIR
JR	XP375WIR
JS	HP375WJD
JT	HP365WIR
JU	VHP300WIR
JW	XHP750CM-2100
JX	XHP825CM-2100
JY	XHP750CM-1850
JZ	XHP900CM-2100
K1	PTO750/1800 Redesign
K2	PTO750/2100 Redesign
K3	VHP1050 Redesign
K4	HP900 Redesign
K5	HP750 Redesign
K6	XHP1150 Redesign
K7	XHP1150 Redesign
K8	XHP950 Redesign
K9	XHP1050 Redesign
KA	XHP900CM-1800
KB	HR2.5-870-1850
KC	HR2.5-1150-2100
KD	CF90 Drill
KG	85mm Drill
L1	XHP1150 Redesign
L2	HP750 Electric Redesign
L3	XHP900 Redesign
L4	XHP900 Redesign
L5	HL750 Redesign
L7	VHP1050
LZ	178.5mm
M5	EXL1400 (50 cycle)
M6	EXL1400 (60 cycle)
M7	PCD 350m/m 1800 (50 cycle)
M8	PCD 350m/m 1800 (60 cycle)
M9	PCD 350m/m 1600
MA	178.5mm

Serial Code	Description
MB	178.5mm
MC	178.5mm
ME	178.5mm
MF	178.5mm
MK	178.5mm
MQ	85mm
MU	85mm
ND	85mm
NK	HR4
NR	HE127
NV	HE127
P1	DXL700A CAT
P10	0AWD, P110AWD
P2	DXL750A CAT
P3	HP900 (50 Hz)
P4	DXL850A CAT
P6	P175A (Threaded Discharge)
P7	P185A (Threaded Discharge)
P8	HP450 CAT
P9	HP230 W7
Q1	HP900 TRB
Q4	P100BWW
Q7	VHP1050 TRB
Q8	HP750 TRB
Q9	XHP1150 TRB
R1	XHP1150 TRB
R2	XHP950 TRB
R3	XHP1050 TRB
R4	XHP1150 TRB
R5	HP750 TRB
R6	XHP900 TRB
R7	VHP1050 TRB
R8	HP900 TRB
R9	P750 Cum
S1	HR2-750
S2	HR2-900
S3	XP825 Cum
S4	P900 Cum
S4	P900 Cum
S5	XL1400CSP
S7	HP320WD
S8	HR2-600-2100
S9	XP175AWJD
T1	XL900CSP
T2	P375TRB

Serial Code	Description
T3	HP450TRB
T4	P425TRB
T5	P335TRB
T6	P300TRB
T7	XL750CSP
T8	HP1050-RD10
TRB	New Interstage
TRB	(1800RPM)
TRB	(2100RPM)
U2	XL1200CSP
U3	XL600CSP
U6	P1600BWGM
U7	XP1400BWGM
U8	HP1300BWGM
U9	PCD350/1600
W1	PCD350/1600
W2	XL1050CSP
W4	P100AWW (JLB)
W5	P175 (JLB)
W6	P185 (JLB)
W7	P100BWW (JLB)
W8	P100AWD (JLB)
X4	P100BWW (Internal Oil)
X5	P100AWD (Internal Oil)
X6	P175 (Internal Oil)
X7	P185 (Internal Oil)
X8	HR2-825
X9	RR15-MC2A
Y1	HP450 Drill
Y3	P600 Drill
Y9	HR2-600-2300
Z2	285mm-P1600WCU
Z4	175.5 mm-P600 Drill; XP525WCU
Z5	178.5mm-P365 Drill; HP450WCU
Z6	P230 Drill
Z7	XP1400WCU
Z8	285mm-HP1300WCU
Z9	XP1200WCU

This page is intentionally left blank.



Portable Power



SECTION 3

Compressors

LEGACY MAINTENANCE KITS

Assorted kits have been developed for a wide range of Portable Compressors. The following list provides the contents and part numbers. The kits available below list the quantities of each filter within the assigned kit.

Key:

A= "Filter Change Kit" gives the user one complete change of elements *excluding* separator elements.

B= "Filter Kit" gives the user multiple quantities of all compressor and engine elements *excluding* separator elements.

C= "Maintenance Kit" gives the user one complete change of elements *including* separator elements.

Model	Kit Part #	Kit Hours	Quantities			Contents	
			A	B	C	Part #	Description
P65WK	A 80024425		1	1		22355481	Eng. Oil Filter
P65WKU	B 80024433		1	1		85052744	Comp. Oil Filter
			1	1		22283360	Fuel Filter
			1	1		22284640	Water Sep.
			1	1		22314322	Pre-Fuel Filter
				1		22295794	Air Filter
P90WIR	A 36058261		1	2	1	92128859	Comp. Oil Filter
	B 36058287		2	2	2	54516075	Comp. Air Filter
	C 36058295		1	4	1	54429675	Eng. Oil Filter
			1	6	1	54381306	Eng. Fuel Filter
			1	6	1	54525530	Eng. Fuel/Water Filter
					1	54517776	Sep. Filter
P90BWIR	A 44009215	500 Dry	1	1	1	22476683	Decal
	B 44009231	1000 Dry	2	2	2	22519128	Oil Sample Kit
	C 44009256	2000 Dry		1	1	22226369	Fuel Filter
			1	1	1	22226351	Eng. Oil Filter
				1	1	36897353	Comp. Oil Filter
				1	1	89232474	Air Filter
					1	22570691	Sep. Filter
P100WW	A 35095041		1	2	1	36897353	Comp. Oil Filter
P100WWU	B 35080803		2	2	2	35291509	Comp. Air Filter
P125WW	C 35053537		1	4	1	35303692	Eng. Oil Filter
P100AWW					1	35309566	Eng. Belt
P100AWWU			1	6	1	35330885	Eng. Fuel Filter
P125AWW					1	22402366	Sep. Filter
P100BWW	A 35095058		1	2	1	35327824	Comp. Oil Filter
P125BWW	B 35086776		2	2	2	35291509	Comp. Air Filter
	C 35086768		1	4	1	35303692	Eng. Lube Filter

Model	Kit Part #	Kit Hours	Quantities			Contents	
			A	B	C	Part #	Description
					1	35309566	Eng. Belt
			1	6	1	35330885	Eng. Fuel Filter
					1	22402325	Sep. Filter
P100WF	A 35095066		1	2	1	35327824	Comp. Oil Filter
P100AWF	B 35089143		2	2	2	35291509	Comp. Air Filter
P125WF	C 35089135		1	4	1	35366681	Eng. Oil Filter
P125AWF			1	6	1	35366699	Eng. Fuel Filter
					1	22402325	Sep. Filter
P100BWF	A 36004588		1	2	1	36897353	Comp. Oil Filter
P125BWF	B 36004596		2	2	2	36876423	Comp. Air Filter
	C 36004604		1	4	1	35366681	Eng. Oil Filter
			1	6	1	35366699	Eng. Fuel Filter
					1	22402226	Sep. Filter
P100WD	A 35095074		1	2	1	36897353	Comp. Oil Filter
P100WDU	B 35080811		2	2	2	35291509	Comp. Air Filter
P100SD	C 35053545		1	6	1	92100981	Eng. Fuel Filter
			1	4	1	35302504	Eng. Oil Filter
					1	35285790	Eng. Belt
					1	22402366	Sep. Filter
P100AWD	A 35095082		1	2	1	35327824	Comp. Oil Filter
P110AWD	B 35080829		2	2	2	35291509	Comp. Air Filter
	C 35079672		1	4	1	35336163	Eng. Oil Filter
			1	6	1	92100981	Eng. Fuel Filter
For models thru S/N 153472					1	22402424	Sep. Filter
Excluding models: 147543-147592, 147983-147961, 150770-150794							
P100AWD	A 35095090		1	2	1	35327824	Comp. Oil Filter
P110AWD	B 35090828		2	2	2	35291509	Comp. Air Filter
	C 35090810		1	4	1	35336163	Eng. Oil Filter
			1	6	1	35368604	Eng. Fuel Filter
					1	22402424	Sep. Filter
For models after S/N 153472							
P100BWD	A 35095090		1	2	1	35327824	Comp. Oil Filter
P110BWD	B 35090828		2	2	2	35291509	Comp. Air Filter
P100CWD	C 35090885		1	4	1	35336163	Eng. Oil Filter
P110CWD			1	6	1	35368604	Eng. Fuel Filter
					1	22402325	Sep. Filter
P100DWD	A 36005056		1	2	1	36897353	Comp. Oil Filter
P125DWD	B 36005064		2	2	2	36876423	Comp. Air Filter
P100EWD	C 36005072		1	4	1	92793223	Eng. Oil Filter
P125EWD			1	6	1	92100981	Eng. Fuel Filter
P100FWD*			1	6	1	36845501	In-Line Fuel Filter
P125FWD*					1	22402226	Sep. Filter
P130WD*							
*For models below S/N 294163							

Model	Kit Part #	Kit Hours	Quantities			Contents	
			A	B	C	Part #	Description
P100FWD	A 36047892		1	2	1	36897353	Comp. Oil Filter
P125FWD	B 36047900		2	2	2	35393685	Comp. Air Filter
P130WD	C 36047918		1	4	1	92793223	Eng. Oil Filter
			1	6	1	92100981	Eng. Fuel Filter
			1	6	1	36845493	In-Line Fuel Filter
For models above S/N 294164					1	22402226	Sep. Filter
P110WIR	A 36058444		1	2	1	36897353	Comp. Oil Filter
P135WIR	B 36058451		2	2	2	35393685	Comp. Air Filter
	C 36058469		1	4	1	54429675	Eng. Oil Filter
			1	6	1	54381306	Eng. Fuel Filter
			1	6	1	54525530	Eng. Fuel/Water Filter
					1	22402226	Sep. Filter
P125WJD	A 35095116		1	2	1	36897353	Comp. Oil Filter
P125AWJD	B 35090844		2	2	2	35291509	Comp. Air Filter
P130WJD	C 35090836		1	4	1	35308030	Eng. Oil Filter
P130AWJD			1	6	1	35308048	Eng. Fuel Filter
					1	22402325	Sep. Filter
P130BWJD	A 35095173		1	2	1	36897353	Comp. Oil Filter
P160BWJD	B 35080894		2	2	2	36876423	Comp. Air Filter
P175BWJD	C 35079862		1	4	1	35308030	Eng. Oil Filter
			1	6	1	35308048	Eng. Fuel Filter
			1	6	1	36845493	In-Line Fuel Filter
For models thru S/N 209634					1	22402325	Sep. Filter
P130BWJD*	A 35095173		1	2	1	36897353	Comp. Oil Filter
P160BWJD*	B 35080894		2	2	2	36876423	Comp. Air Filter
P175BWJD*	C 36011070		1	4	1	35308030	Eng. Oil Filter
*Used on models after S/N 209634			1	6	1	35308048	Eng. Fuel Filter
P130CWJD**			1	6	1	36845493	In-Line Fuel Filter
P160CWJD**					1	22402325	Sep. Filter
P175CWJD**							
** For models with glass type fuel filter							
P160CWJD*	B 36023232			2	2	36876423	Comp. Air Filter
P175CWJD*	C 36023240			4	1	35308030	Eng. Oil Filter
P100WJD				6	1	36534659	Eng. Fuel Filter
P125BWJD**				6	1	36845493	In-Line Fuel Filter
P130DWJD**					1	22402226	Sep. Filter
P160DWJD**							
P175DWJD**							
*Used on models with spin-on fuel filter							
**For models below S/N 294163							
P100WJD	A 36047868		1	2	1	36897353	Comp. Oil Filter
P125BWJD	B 36047876		2	2	2	35393685	Comp. Air Filter
P130DWJD	C 36047884		1	4	1	35308030	Eng. Oil Filter

Model	Kit Part #	Kit Hours	Quantities			Contents	
			A	B	C	Part #	Description
P160DWJD			1	6	1	36534659	Eng. Fuel Filter
P175DWJD			1	6	1	36845493	In-Line Fuel Filter
For models above S/N 294164					1	22402226	Sep. Filter
P100WUFU	A 35095124		1	2	1	36897353	Comp. Oil Filter
P125WUFU	B 35090745		2	2	2	36876423	Comp. Air Filter
P160WUFU	C 35090737		1	4	1	35366681	Eng. Oil Filter
P175WUFU			1	6	1	35366699	Eng. Fuel Filter
					1	22402325	Sep. Filter
P150WW	A 35095132		1	2	1	36897353	Comp. Oil Filter
P175WW	B 35080837		2	2	2	36876423	Comp. Air Filter
P185WW	C 35053552		1	4	1	35303692	Eng. Oil Filter
P175WWU			1	6	1	35330885	Eng. Fuel Filter
					1	35309566	Eng. Belt
					1	35288224	Fan Belt
					1	22402366	Sep. Filter
P150AWW	A 35095132		1	2	1	36897353	Comp. Oil Filter
P160AWW	B 35080837		2	2	2	36876423	Comp. Air Filter
P160BWW	C 35079847		1	4	1	35303692	Eng. Oil Filter
P175AWW			1	6	1	35330885	Eng. Fuel Filter
P175BWW					1	35309566	Eng. Belt
P185AWW					1	22402325	Sep. Filter
P185BWW							
P175AWWU							
P125WD	A 35095157		1	2	1	36897353	Comp. Oil Filter
P150WD	B 35080860		2	2	2	36876423	Comp. Air Filter
P175WD	C 35053560		1	4	1	35292358	Eng. Oil Filter
P175WDU			1	6	1	35292366	Eng. Fuel Filter
					1	35305408	Eng. Belt
					1	35288224	Fan Belt
					1	22402366	Sep. Filter
P125AWD	A 35095157		1	2	1	36897353	Comp. Oil Filter
P125BWD	B 35080860		2	2	2	36876423	Comp. Air Filter
P150AWD	C 35079854		1	4	1	35292358	Eng. Oil Filter
P150BWD			1	6	1	35292366	Eng. Fuel Filter
P175AWD					1	35305408	Eng. Belt
P175BWD					1	22402325	Sep. Filter
P175AWDU							
P175ASD							
P175CWD	A 36005056		1	2	1	36897353	Comp. Oil Filter
P175DWD	B 36005064		2	2	2	36876423	Comp. Air Filter
P185WD	C 36005072		1	4	1	92793223	Eng. Oil Filter
P185AWD*			1	6	1	92100981	Eng. Fuel Filter
			1	6	1	36845501	In-Line Fuel Filter
*For models below S/N 294163					1	22402226	Sep. Filter

Model	Kit Part #	Kit Hours	Quantities			Contents	
			A	B	C	Part #	Description
P185AWD	A 36047892		1	2	1	36897353	Comp. Oil Filter
	B 36047900		2	2	2	35393685	Comp. Air Filter
	C 36047918		1	4	1	92793223	Eng. Oil Filter
			1	6	1	92100981	Eng. Fuel Filter
			1	6	1	36845493	In-Line Fuel Filter
For models above S/N 294164					1	22402226	Sep. Filter
P185WJD	A 35095173		1	2	1	36897353	Comp. Oil Filter
	B 35080894		2	2	2	36876423	Comp. Air Filter
	C 35058734		1	6	1	35308048	Eng. Fuel Filter
					1	35288224	Eng. Belt
					1	22402366	Sep. Filter
			1	4	1	35308030	Eng. Oil Filter
P160WJD	A 35095173		1	2	1	36897353	Comp. Oil Filter
P160AWJD	B 35080894		2	2	2	36876423	Comp. Air Filter
XP175BWJD	C 35079862		1	4	1	35308030	Eng. Oil Filter
P185AWJD			1	6	1	35308048	Eng. Fuel Filter
P185BWJD					1	22402325	Sep. Filter
P185CWJD*			1	6	1	36845493	In-Line Fuel Filter
P100WJDU							
P125WJDU							
P160WJDU							
P175WJDU							
P185WJDU							
*For models thru S/N 209634							
P185CWJD*	A 35095173		1	2	1	36897353	Comp. Oil Filter
P185DWJD**	B 35080894		2	2	2	36876423	Comp. Air Filter
	C 36011070		1	4	1	35308030	Eng. Oil Filter
			1	6	1	35308048	Eng. Fuel Filter
*For models after S/N 209634					1	22402226	Sep. Filter
**For models with glass type fuel filter			1	6	1	36845493	In-Line Fuel Filter
P110AWIR	A 22357297		1		1	22226351	Eng. Oil Filter
P135AWIR	C 22357305		1		1	22226369	Eng. Fuel Filter
P185AWIR			2		2	35393651	Safety Air Filter
XP185AWIR			2		2	35393685	Outer Air Filter
			1		1	36897353	Comp. Oil Filter
			1		1	54525530	Eng. Fuel/Water Filter
					1	54625942	Sep. Filter
P185DWJD	A 36023224		1	2	1	36897353	Comp. Oil Filter
XP185DWJD	B 36023232		2	2	2	36876423	Comp. Air Filter
	C 36023240		1	4	1	35308030	Eng. Oil Filter
			1	6	1	36534659	Eng. Fuel Filter
			1	6	1	36845493	In-Line Fuel Filter
For models with spin-on type fuel filter					1	22402226	Sep. Filter

Model	Kit Part #	Kit Hours	Quantities			Contents	
			A	B	C	Part #	Description
P185EWJD	A 36038446		1	2	1	36897353	Comp. Oil Filter
XP185EWJD	B 36038453		2	2	2	36876423	Comp. Air Filter
	C 36038461		1	4	1	36881696	Eng. Oil Filter
			1	6	1	36534659	Eng. Fuel Filter
For models below S/N 294163					1	22402226	Sep. Filter
P185EWJD*	A 36054013		1	2	1	36897353	Comp. Oil Filter
XP185EWJD*	B 36054021		2	2	2	35393685	Comp. Air Filter
	C 36054039		1	4	1	36881696	Eng. Oil Filter
			1	6	1	36534659	Eng. Fuel Filter
			1	6	1	54468178	Eng. Fuel/Water Filter
For models below S/N 294163					1	22402226	Sep. Filter
P185GWJD	A 44000917	500	1	1		22476683	Decal
	B 44000933	1000	1	1		22545867	Eng. Oil Filter
			1	1		22556138	Fuel Filter
			2	2		35393651	Air Filter, Safety
			2	2		35393685	Air Filter, Primary
			1	1		36897353	Comp. Oil Filter
				1		54625942	Sep. Filter
AirSource	A 36096170	500	1	1		22436323	Comp. Oil Filter
	B 36096196	1000	1	1		22476683	Decal
			1	1		22496905	Eng. Oil Filter
			1	1		22532378	Fuel/Water Filter
			2	2		35393651	Air Filter, Safety
			2	2		35393685	Air Filter, Primary
			1	1		36845493	Fuel Filter
				1		22436331	Sep. Filter
AirSource Plus	A 36096170	500	1	1		22436323	Comp. Oil Filter
	B 36096196	1000	1	1		22476683	Decal
			1	1		22496905	Eng. Oil Filter
			1	1		22532378	Fuel/Water Filter
			2	2		35393651	Air Filter, Safety
			2	2		35393685	Air Filter, Primary
			1	1		36845493	Fuel Filter
				1		22436331	Sep. Filter
AirSource	A 36096212	500	1	1		22436323	Comp. Oil Filter
Plus JD	B 36096238	1000	1	1		22476683	Decal
			1	1		22545867	Eng. Oil Filter
			1	1		22556138	Eng. Oil Filter
			2	2		35393651	Air Filter, Safety
			2	2		35393685	Air Filter, Primary
			1	1		36845493	Fuel Filter
				1		22436331	Sep. Filter
P185WIR	A 36054013		1	2	1	36897353	Comp. Oil Filter
XP185WIR	B 36054021		2	2	2	35393685	Comp. Air Filter

Model	Kit Part #	Kit Hours	Quantities			Contents	
			A	B	C	Part #	Description
	C 36054039		1	4	1	54381314	Eng. Oil Filter
			1	6	1	54381306	Eng. Fuel Filter
			1	6	1	54468178	Eng. Fuel/Water Filter
					1	22402226	Sep. Filter
P130AWJDU	A 36038446		1	2	1	36897353	Comp. Oil Filter
P175AWJDU	B 36038453		2	2	2	36876423	Comp. Air Filter
P185AWJDU	C 36038461		1	4	1	36881696	Eng. Oil Filter
			1	6	1	36534659	Eng. Fuel Filter
					1	22402226	Sep. Filter
P250WD	A 35095199		1	2	1	36897353	Comp. Oil Filter
P250SD	B 35090902		2	2	2	35318252	Comp. Air Filter
	C 35079870		1	4	1	35292358	Eng. Oil Filter
			1	6	1	35292366	Eng. Fuel Filter
					1	35305408	Eng. Belt
					1	35288224	Fan Belt
					1	22402382	Sep. Filter
P250AWD	A 35095199		1	2	1	36897353	Comp. Oil Filter
P250BWD	B 35080902		2	2	2	35318252	Comp. Air Filter
	C 35087444		1	4	1	35292358	Eng. Lube Filter
			1	6	1	35292366	Eng. Fuel Filter
					1	35305408	Eng. Belt
					1	35605716	Fan Belt
					1	22402358	Sep. Filter
P250WJD	A 36007268		1	2	1	36897353	Comp. Oil Filter
P250AWJD*	B 36007276		1	1	1	36876423	Eng. Air Filter
	C 36007284		1	1	1	35318252	Comp Air Filter
			1	4	1	35308030	Eng. Oil Filter
			1	6	1	35308048	Eng. Fuel Filter
			1	6	1	36845493	In-Line Fuel Filter
*For models with glass type fuel filter					1	22402267	Sep. Filter
P250AWJD	A 36023527		1	2	1	36897353	Comp. Oil Filter
	B 36023265		1	1	1	36876423	Eng. Air Filter
	C 36023273		1	1	1	35318252	Comp. Air Filter
			1	4	1	35308030	Eng. Oil Filter
			1	6	1	36534659	Eng. Fuel Filter
			1	6	1	36845493	In-Line Fuel Filter
For models with spin-on type fuel filter					1	22402267	Sep. Filter
P250BWJD	A 36034148		1	2	1	36897353	Comp. Oil Filter
	B 36034155		1	1	1	36876423	Eng. Air Filter
	C 36034163		1	1	1	35318252	Comp. Air Filter
			1	4	1	36881696	Eng. Oil Filter
			1	6	1	36534659	Eng. Fuel Filter
			1	6	1	36845493	In-Line Fuel Filter
					1	22402267	Sep. Filter

Model	Kit Part #	Kit Hours	Quantities			Contents	
			A	B	C	Part #	Description
P250CWJD	A 36054047		1	2	1	36897353	Comp. Oil Filter
	B 36054054		1	1	1	35393685	Eng. Air Filter
	C 36054062		1	1	1	54415377	Comp. Air Filter
			1	4	1	36881696	Eng. Oil Filter
			1	6	1	36534659	Fuel Filter
For models thru April 2000					1	92754688	Sep. Filter
P250CWJD	A 36054492		1	2	1	36897353	Comp. Oil Filter
	B 36054500		1	1	1	35393685	Eng. Air Filter
	C 36054518		1	1	1	54471834	Comp. Air Filter
			1	4	1	36881696	Eng. Oil Filter
			1	6	1	36534659	Fuel Filter
For models thru April 2000					1	92754688	Sep. Filter
P250WIR	A 36054468		1	2	1	36897353	Comp. Oil Filter
P260WIR	B 36054476		1	1	1	35393685	Eng. Air Filter
	C 36054484		1	1	1	54471834	Comp. Air Filter
			1	4	1	54381314	Eng. Oil Filter
			1	6	1	54381306	Fuel Filter
			1	6	1	54468178	Eng. Fuel/Water Filter
					1	92754688	Sep. Filter
P250WCU	A 36034171		1	2	1	36897353	Comp. Oil Filter
P250AWCU	B 36034189		1	1	1	36876423	Eng. Air Filter
	C 36034197		1	1	1	35318252	Comp. Air Filter
			1	4	1	35374651	Eng. Oil Filter
			1	6	1	35374669	Fuel Filter
			1	6	1	35374677	Eng. Sec. Fuel Filter
			1	6	1	36845493	In-Line Fuel Filter
					1	22402267	Sep. Filter
P300SGM	B 35080910			2	2	35277078	Comp. Air Filter
	C 35053578			4	1	35290642	Eng. Oil Filter
				6	1	35290543	Eng. Fuel Filter
					1	35308576	Eng. Belt
					1	35280478	Fan Belt
					1	22402382	Sep. Filter
For models with canister style engine elements				6	1	35290550	Eng. Strainer Filter
P300WGM	A 35095223		1	2	1	35328509	Comp. Oil Filter
P300SGM	B 35080928		2	2	2	35277078	Comp. Air Filter
	C 35079888		1	4	1	35330893	Eng. Oil Filter
			1	6	1	35330919	Fuel Strainer Filter
			1	6	1	35330927	Eng. Fuel Filter
					1	35308576	Eng. Belt
					1	35280478	Fan Belt
For models with spin-on style engine elements					1	22402382	Sep. Filter
HP300WD	A 35095231		1	2	1	35328509	Comp. Oil Filter
HP300AWD	B 35089507		2	2	2	35326230	Comp. Air Filter

Model	Kit Part #	Kit Hours	Quantities			Contents	
			A	B	C	Part #	Description
VHP300AWD	C 35089499		1	4	1	35366301	Eng. Lube Filter
			1	6	1	35292366	Eng. Fuel Filter
					1	22402341	Sep. Filter
			2	2	2	35377696	Comp. Saf. Air Filter
			2	2	2	35291475	Air Cleaner Wing Nut
P335WD	A 35095231		1	2	1	35328509	Comp. Oil Filter
P335SD	B 35080936		2	2	2	35277078	Comp. Air Filter
	C 35053586		1	4	1	35330687	Eng. Oil Filter
			1	6	1	35292366	Eng. Fuel Filter
					1	35288224	Fan Belt
					1	35285790	Eng. Belt
					1	22402382	Sep. Filter
P375WD	A 35095256		1	2	1	35328509	Comp. Oil Filter
P375SD	B 35080944		1	1	1	35318252	Eng. Air Filter
HP320WD	C 35079680		1	1	1	35326230	Comp. Air Filter
P375AWD			1	4	1	35330687	Eng. Oil Filter
			1	6	1	35292366	Eng. Fuel Filter
					1	35285790	Eng. Belt
					1	22402341	Sep. Filter
			1	1	1	35377696	Comp. Safety Air Filter
			1	1	1	35328442	Eng. Safety Air Filter
			2	2	2	35291475	Air Cleaner Wing Nut
HP300WCU	A 36013993		1	2	1	36897346	Comp. Oil Filter
P375WCU	B 36014009		2	2	2	35326230	Comp./Eng. Air Filter
	C 36014017		2	2	2	35377696	Com. Safety Air Filter
			1	4	1	35387489	Eng. Oil Filter
			1	6	1	35374669	Eng. Fuel Filter
			1	6	1	35374677	Eng. Fuel Filter
					1	22402341	Sep. Filter
HP300AWCU	A 36034080		1	2	1	36897346	Comp. Oil Filter
HP300BWCU	B 36034098		2	2	2	35326230	Comp./Eng. Air Filter
P375AWCU	C 36034106		2	2	2	35377696	Comp. Safety Air Filter
P375BWCU			1	4	1	35374651	Eng. Oil Filter
			1	6	1	35374669	Eng. Fuel Filter
			1	6	1	35374677	Eng. Fuel Sec. Filter
			1	6	1	36845493	In-Line Fuel Filter
					1	22402259	Sep. Filter
HP300WJD	A 36034114		1	2	1	36897346	Comp. Oil Filter
P375WJD	B 36034122		2	2	2	35326230	Comp. Eng./Air Filter
	C 36034130		2	2	2	35377696	Comp. Safety Air Filter
			1	4	1	36881696	Eng. Oil Filter
			1	6	1	35389527	Eng. Fuel Filter
			1	6	1	36845493	In-Line Fuel Filter
					1	22402259	Sep. Filter

Model	Kit Part #	Kit Hours	Quantities			Contents	
			A	B	C	Part #	Description
HP375WJD	A 36064707		1	2	1	36897346	Comp. Oil Filter
	B 36064715		2	2	2	54717145	Comp. Air Filter
	C 36064723		2	2	2	54717152	Comp. Safety Air Filter
			1	4	1	36881696	Eng. Oil Filter
			1	6	1	36534659	Eng. Fuel Filter
			1	6	1	36845493	In-Line Fuel Filter
					1	22111975	Sep. Filter
VHP300WIR	A 36064673		1	2	1	36897346	Comp. Oil Filter
HP365WIR	B 36064681		2	2	2	54717145	Comp. Air Filter
XP375WIR	C 36064699		2	2	2	54717152	Comp. Safety Air Filter
P425WIR			1	4	1	54565205	Eng. Oil Filter
			1	6	1	54565197	Eng. Fuel Filter
			1	6	1	54468178	Eng. Fuel/Water Filter
					1	22111975	Sep. Filter
VHP300AWIR	A 36089647		2	2		54717145	Comp. Air Filter
HP375AWIR	B 36089662		2	2		54717152	Comp. Fuel Filter
XP375AWIR			1	1		22206197	Eng. Fuel Filter
P425AWIR			1	1		22206148	Eng. Oil Filter
			1	1		36897346	Comp. Oil Filter
			1	1		54468178	Eng. Fuel/Water Filter
				1		22111975	Sep. Filter
VHP300BWIR	No Kits				2	54717145	Comp. Air Filter
HP375BWIR					2	54717152	Comp. Fuel Filter
XP375BWIR					1	22206197	Eng. Fuel Filter
P425BWIR					1	22206148	Eng. Oil Filter
					1	36897346	Comp. Oil Filter
					1	54468160	Eng. Fuel/Water Filter
					1	22111975	Sep. Filter
HP375AWD	A 36006484		1	2	1	35328509	Comp. Oil Filter
XP400AWD	B 36006492		2	2	2	35380773	Pri. Air Filter
P425AWD	C 36006500		2	2	2	35380781	Saf. Air Filter
			1	4	1	35366301	Eng. Oil Filter
			1	6	1	35292366	Eng. Fuel Filter
					1	22402341	Sep. Filter
P425WGM	A 35095264		1	2	1	35330133	Comp. Oil Filter
P425SGM	B 35080951		2	2	2	35277078	Comp. Air Filter
	C 35053594		1	4	1	35290626	Eng. Oil Filter
			1	6	1	35290550	Eng. Strainer Filter
			1	6	1	35290543	Eng. Fuel Filter
					1	35308576	Eng. Belt
					1	35280445	Fan Belt
For models with canister style engine elements					1	22402465	Sep. Filter
P425WGM	A 35095272		1	2	1	35330133	Comp. Oil Filter
P425SGM	B 35080969		2	2	2	35277078	Comp. Air Filter

Model	Kit Part #	Kit Hours	Quantities			Contents	
			A	B	C	Part #	Description
	C 35079896		1	4	1	35330901	Eng. Oil Filter
			1	6	1	35330919	Fuel Strainer Filter
			1	6	1	35330927	Eng. Fuel Filter
					1	35308576	Eng. Belt
					1	35280445	Fan Belt
For models with spin-on style engine elements					1	22402465	Sep. Filter
HP450SCA	A 35095280		1	2	1	35330133	Comp. Oil Filter
P450SCA	B 35080977		2	2	2	35300383	Comp. Saf. Air Filter
HP425SCA	C 35079904		2	2	1	35300375	Comp. Pri. Air Filter
			1	6	1	35309517	Eng. Water Sep. Filter
			1	4	1	35309525	Eng. Oil Filter
					1	35280445	Fan Belt
					1	22402465	Sep. Filter
For models with engine serial #90N39380-90N39379 and anything above 90N39453			1	6	1	35310549	Eng. Fuel Filter
HP450SCA	A 35095298		1	2	1	35330133	Comp. Oil Filter
P450SCA	B 35086396		2	2	2	35300383	Comp. Saf. Air Filter
HP425SCA	C 35086206		2	2	2	35300375	Comp. Pri. Air Filter
			1	6	1	35309517	Eng. Water Sep. Filter
			1	4	1	35358597	Eng. Oil Filter
			1	6	1	35310549	Eng. Fuel Filter
					1	35280445	Fan Belt
For models with engine serial #90N38769-90N39379 and anything above 90N39453					1	22402465	Sep. Filter
VHP400WCU	A 36014025		1	2	1	36897346	Comp. Oil Filter
VHP400AWCU	B 36014033		1	1	1	35300375	Eng. Pri. Air Filter
HP450WCU	C 36014041		1	1	1	35300383	Eng. Saf. Air Filter
HP450AWCU			1	1	1	35384627	Comp. Saf. Air Filter
XP525WCU			1	1	1	35384619	Comp. Pri. Air Filter
XP525AWCU			1	4	1	35387489	Eng. Oil Filter
P600WCU			1	6	1	35374669	Eng. Fuel/ Water Filter
P600AWCU			1	6	1	35374677	Eng. Fuel Filter
					1	22402309	Sep. Filter
VHP400AWIR	No Kits				2	54717145	Comp./Eng. Pri. Air Filter
VHP400WIR					2	54717152	Comp./Eng. Saf. Air Filter
HP450WIR					1	54461878	Eng. Fuel/Water Filter
					1	36897346	Comp. Oil Filter
					1	22206148	Eng. Oil Filter
					1	22206197	Eng. Fuel Filter
					1	22111975	Sep. Filter
VHP400BWIR	No Kits				1	54717145	Comp./Eng. Pri. Air Filter

Model	Kit Part #	Kit Hours	Quantities			Contents	
			A	B	C	Part #	Description
HP450BWIR					1	54717152	Comp./Eng. Saf. Air Filter
					1	22926737	Eng. Fuel/Water Filter
					2	36897346	Comp. Oil Filter
					1	22206148	Eng. Oil Filter
					1	22969257	Eng. Fuel Filter
					1	22111975	Sep. Filter
P600WIR	No Kits				1	22119168	Comp. Pri. Air Filter
					1	22119176	Comp. Saf. Air Filter
					1	54717145	Eng. Pri. Air Filter
					1	54717152	Eng. Saf. Air Filter
					1	54468178	Eng. Fuel/Water Filter
					1	36897346	Comp. Oil Filter
					1	22206148	Eng. Oil Filter
					1	22206197	Eng. Fuel Filter
					1	22111975	Sep. Filter
P600BWIR	No Kits				1	22119168	Comp. Pri. Air Filter
					1	22119176	Comp. Saf. Air Filter
					1	54717145	Eng. Pri. Air Filter
					1	54717152	Eng. Saf. Air Filter
					1	22926737	Eng. Fuel/Water Filter
					1	36897346	Comp. Oil Filter
					1	22206148	Eng. Oil Filter
					1	22969257	Eng. Fuel Filter
					1	22111975	Sep. Filter
HP525WGM	A 35095306		1	2	1	35330133	Comp. Oil Filter
XP600WGM	B 35080985		2	2	2	35109156	Comp. Pri. Air Filter
P700WGM	C 35053602		2	2	2	35109206	Comp. Saf. Air Filter
			1	4	1	35290626	Eng. Oil Filter
			1	6	1	35290618	Eng. Fuel Strainer
			1	6	1	35290600	Eng. Fuel Filter
					1	35308741	Eng. Alt. Belt
					1	35308733	Eng. Water Pump Belt
					1	22402440	Sep. Filter
HP525AWGM	A 35095306		1	2	1	35330133	Comp. Oil Filter
XP600AWGM	B 35080985		2	2	2	35109156	Comp. Pri. Air Filter
P700AWGM	C 35079912		2	2	2	35109206	Comp. Saf. Air Filter
			1	4	1	35290626	Eng. Oil Filter
			1	6	1	35290618	Eng. Fuel Strainer
			1	6	1	35290600	Eng. Fuel Filter
					1	35308741	Eng. Alt. Belt
					1	35308733	Eng. Water Pump Belt
For models with canister style engine oil filters					1	36711950	Sep. Filter
HP525AWGM	A 35095322		1	2	1	35330133	Comp. Oil Filter

Model	Kit Part #	Kit Hours	Quantities			Contents	
			A	B	C	Part #	Description
HP525BWGM	B 35081009		2	2	2	35109156	Comp. Pri. Air Filter
HP525CWGM	C 35079920		2	2	2	35109206	Comp. Saf. Air Filter
XP600AWGM			1	4	1	35330901	Eng. Oil Filter
XP600BWGM			1	6	1	35290618	Eng. Fuel Strainer
XP600CWGM			1	6	1	35290600	Eng. Fuel Filter
P700AWGM					1	35308741	Eng. Alt. Belt
P700BWGM					1	35308733	Eng. Water Pump Belt
P700CWGM					1	36711950	Sep. Filter
For model with spin-on style engine oil filters							
XP600CUM	A 35095330		1	2	1	35330133	Comp. Oil Filter
P700CUM	B 35081017		2	2	2	35109156	Comp. Pri. Air Filter
	C 35053610		2	2	2	35109206	Comp. Saf. Air Filter
			1	4	1	35289099	Eng. Oil Filter
			1	4	1	35289107	Eng. Oil Bypass Filter
			1	6	1	35289081	Eng. Fuel Filter
For models with Cummins V-504 engine					1	22402440	Sep. Filter
HP600WGM	A 35095348		1	2	1	35330133	Comp. Oil Filter
XP750WGM	B 35081025		2	2	2	35109271	Comp. Saf. Air Filter
P850WGM	C 35060706		2	2	2	35109263	Comp. Pri. Air Filter
			1	4	1	35290626	Eng. Oil Filter
			1	6	1	35290618	Eng. Fuel Strainer
			1	6	1	35290600	Eng. Fuel Filter
For models with canister style engine oil filters					1	36711950	Sep. Filter
HP600WGM	A 35095355		1	2	1	35330133	Comp. Oil Filter
HP600AWGM	B 35081033		2	2	2	35109271	Comp. Saf. Air Filter
HP600BWGM	C 35079938		2	2	2	35109263	Comp. Pri. Air Filter
XP750WGM			1	4	1	35330901	Eng. Oil Filter
XP750AWGM			1	6	1	35290618	Eng. Fuel Strainer
XP750BWGM			1	6	1	35290600	Eng. Fuel Filter
P850WGM					1	36711950	Sep. Filter
P850WGM							
P850AWGM							
P850AWGM							
P850BWGM							
For models with spin-on engine oil filters							
HP750WCU	A 35095363		2	4	2	36897353	Comp. Oil Filter
HP600WCU	B 35086404		2	2	2	36867786	Comp. Pri. Air Filter
XP600WCU	C 35085406		2	2	2	36876019	Comp. Saf. Air Filter
P750WCU			1	4	1	35357243	Eng. Oil Filter
XP850WCU			1	4	1	35357250	Eng. Oil Bypass Filter
P900WCU			2	6	2	35357268	Eng. Fuel Filter
For models with Cummins L10-225-C engine			1	6	1	35357276	Eng. Water Sep. Filter
For models with dual engine oil filters use on engines with serial number prior to 34607424					1	22291280	Sep. Filter

Model	Kit Part #	Kit Hours	Quantities			Contents	
			A	B	C	Part #	Description
HP600WCU	A 36002046		2	4	2	36897353	Comp. Oil Filter
HP600BWCU	B 36002053		2	2	2	36867786	Comp. Pri. Air Filter
HP600AWCU	C 36002061		2	2	2	36876019	Comp. Saf. Air Filter
XP600WCU			1	4	1	35378546	Eng. Oil Filter
XP600AWCU			1	6	1	35357268	Eng. Fuel Filter
HP750WCU			1	6	1	35357276	Eng. Water Filter
HP750AWCU					1	22291280	Sep. Filter
HP750BWCU							
XP750BWCU							
P750WCU							
P750AWCU							
HP825AWCU							
HP825BWCU							
XP825WCU							
XP825AWCU							
XP825BWCU							
XP900AWCU							
XP900BWCU							
P900WCU							
P900AWCU							
P900BWCU							
For models with Cummins L10 engine with single oil filter after engine serial # 34607423							
HP600CWCU	A 36020717		1	2	1	36897346	Comp. Oil Filter
HP750CWCU	B 36020725		2	2	2	36876019	Comp. Saf. Air Filter
XP750CWCU	C 36020733		2	2	2	36867786	Comp. Pri. Air Filter
XP825CWCU			1	4	1	35378546	Eng. Oil Filter
			1	6	1	35374669	Eng. Fuel Filter
			1	6	1	36868156	Eng. Water Filter
			1	6	1	35374677	Eng. Sec. Fuel Filter
					1	54641519	Sep. Filter
HP600WJD	A 36023190		1	2	1	36897346	Comp. Oil Filter
XP750WJD	B 36023208		2	2	2	36867786	Comp. Pri. Air Filter
	C 36023216		2	2	2	36876019	Comp. Saf. Air Filter
			1	4	1	36870038	Eng. Oil Filter
			1	6	1	36870046	Eng. Fuel Filter
					1	54641519	Sep. Filter
HP750WJD	A 36039873		1	2	1	36897346	Comp. Oil Filter
XP825WJD	B 36039881		2	2	2	36867786	Comp. Pri. Air Filter
	C 36039899		2	2	2	36876019	Comp. Saf. Air Filter
			1	4	1	36870038	Eng. Oil Filter
			1	6	1	36889657	Eng. Fuel Filter
					1	54641519	Sep. Filter
HP825CWCU	A 36036812		2	4	2	36897353	Comp. Oil Filter

Model	Kit Part #	Kit Hours	Quantities			Contents	
			A	B	C	Part #	Description
XP900CWCU	B 36036820		2	2	2	36867786	Comp. Pri. Air Filter
	C 36036838		2	2	2	36876019	Comp. Saf. Air Filter
			1	4	1	35378546	Eng. Oil Filter
			1	6	1	35357268	Eng. Fuel Filter
			1	6	1	35357276	Eng. Water Filter
					1	22291280	Sep. Filter
VHP750WCU	A 36047629		2	4	2	36897346	Comp. Oil Filter
HP825DWCU	B 36036820		2	2	2	36867786	Comp. Pri. Air Filter
VHP825WCU	C 36047645		2	2	2	36876019	Comp. Saf. Air Filter
XP900DWCU			1	4	1	35378546	Eng. Oil Filter
HP915WCU			1	6	1	35357268	Eng. Fuel Filter
			1	6	1	36896314	Eng. Water Filter
					1	36891315	Sep. Filter
XP1000WCU	A 36047652		2	4	2	36897346	Comp. Oil Filter
XP1050WCU	B 36047660		1	1	1	36867786	Comp. Pri. Air Filter
	C 36047678		1	1	1	36876019	Comp. Saf. Air Filter
			1	1	1	36893840	Eng. Pri. Air Filter
			1	1	1	36893857	Eng. Saf. Air Filter
			1	4	1	35378546	Eng. Oil Filter
			1	6	1	35357268	Eng. Fuel Filter
			1	6	1	36896314	Eng. Water Filter
					1	36891315	Sep. Filter
XHP750WGM	A 35095371		1	2	1	35330125	Comp. Oil Filter
XHP750SGM	B 35081041		2	2	2	35109271	Comp. Saf. Air Filter
XHP750WGM	C 35060680		2	2	2	35109263	Comp. Pri. Air Filter
			1	4	1	35290626	Eng. Oil Filter
			1	6	1	35290618	Eng. Fuel Strainer
			1	6	1	35290600	Eng. Fuel Filter
For models with canister style engine filters thru serial #107770					1	22402507	Sep. Filter
XHP750SGM	A 35095389		1	2	1	35331025	Comp. Oil Filter
	B 35086412		2	2	2	35109271	Comp. Saf. Air Filter
	C 35086214		2	2	2	35109263	Comp. Pri. Air Filter
			1	4	1	35330901	Eng. Oil Filter
			1	6	1	35290618	Eng. Fuel Filter Strainer
			1	6	1	35290600	Eng. Fuel Filter
For models with spin-on style engine oil filters					1	22402507	Sep. Filter
XHP750SCAT	A 35095397		1	2	1	35367879	Comp. Oil Filter
	B 35089770		2	2	2	35109271	Comp. Saf. Air Filter
	C 35089762		2	2	2	35109263	Comp. Pri. Air Filter
			1	4	1	35310556	Eng. Oil Filter
			1	6	1	35310549	Eng. Fuel Filter
			1	6	1	35607605	Eng. Water Filter

Model	Kit Part #	Kit Hours	Quantities			Contents	
			A	B	C	Part #	Description
For models below S/N 170842					1	35864842	Sep. Filter
XHP750SCAT	A 35099043		2	4	2	36860336	Comp. Oil Filter
XHP600SCAT	B 35099050		2	2	2	35109271	Comp. Saf. Air Filter
	C 35099068		2	2	2	35109263	Comp. Pri. Air Filter
			1	4	1	35310556	Eng. Oil Filter
			1	6	1	36921674	Eng. Pri. Fuel Filter
			1	6	1	35310549	Eng. Fuel Filter
			1	6	1	35607605	Eng. Water Filter
For models 170842 and above					1	35864842	Sep. Filter
VHP750AWCAT	B 36050144			2	2	36867786	Comp. Pri. Air Filter
VHP850WCAT	C 36050151			2	2	36876019	Comp. Saf. Air Filter
VHP850AWCAT				4	1	35310556	Eng. Oil Filter
HP900WCAT				6	1	35310549	Eng. Fuel Filter
HP900AWCAT				6	1	35607605	Eng. Water Filter
				6	1	36921674	Eng. Pri. Fuel Filter
					1	36891315	Sep. Filter
XP1000WCAT	A 36050169		2	4	2	36897346	Comp. Oil Filter
XP1000AWCAT	B 36050177		1	1	1	36867786	Comp. Pri. Air Filter
	C 36050185		1	1	1	36876019	Comp. Saf. Air Filter
			1	1	1	36893840	Eng. Pri. Air Filter
			1	1	1	36893857	Eng. Saf. Air Filter
			1	4	1	35310556	Eng. Oil Filter
			1	6	1	35310549	Eng. Fuel Filter
			1	6	1	35607605	Eng. Water Filter
			1	6	1	36921674	Eng. Pri. Fuel Filter
					1	36891315	Sep. Filter
XHP750WGM	A 35095405		1	2	1	35330125	Comp. Oil Filter
	B 35081058		2	2	2	35123520	Comp. Saf. Air Filter
	C 35079946		2	2	2	35123512	Comp. Pri. Air Filter
			1	4	1	35290626	Eng. Oil Filter
			1	6	1	35290618	Eng. Fuel Strainer
			1	6	1	35290600	Eng. Fuel Filter
For models above 107770 with canister style engine oil filters					1	22402507	Sep. Filter
XHP750WGM	A 35095413		1	2	1	35330125	Comp. Oil Filter
XHP750AWGM	B 35081066		2	2	2	35123520	Comp. Saf. Air Filter
XHP750BWGM	C 35079953		2	2	2	35123512	Comp. Pri. Air Filter
			1	4	1	35330901	Eng. Oil Filter
			1	6	1	35290618	Eng. Fuel Strainer
			1	6	1	35290600	Eng. Fuel Filter
For models with spin-on style engine oil filters above 107770					1	22402507	Sep. Filter
XHP650WCAT	A 35096841		2	4	2	36860336	Comp. Oil Filter
XHP750WCAT	B 35096833		1	1	1	36867786	Eng. Pri. Air Filter
XHP825WCAT	C 35096825		1	1	1	35123512	Comp. Pri. Air Filter

Model	Kit Part #	Kit Hours	Quantities			Contents	
			A	B	C	Part #	Description
XHP650AWCAT			1	1	1	36876019	Eng. Saf. Air Filter
XHP750AWCAT			1	1	1	35123520	Comp. Saf. Air Filter
XHP825AWCAT			1	4	1	35310556	Eng. Oil Filter
			1	6	1	36921674	Eng. Pri. Fuel Filter
			1	6	1	35310549	Eng. Fuel Filter
			1	6	1	35607605	Eng. Water Filter
On "A" version models, these air filter housings have round air intake holes					1	22402242	Sep. Filter
XHP650AWCAT	A 36020683		2	4	2	36860336	Comp. Oil Filter
XHP750AWCAT	B 36020691		1	1	1	35123512	Comp. Pri. Air Filter
XHP825AWCAT	C 36020709		1	1	1	35123520	Comp. Saf. Air Filter
			1	1	1	36867786	Eng. Pri. Air Filter
			1	1	1	36876019	Eng. Saf. Air Filter
			1	4	1	36921674	Eng. Pri. Fuel Filter
			1	6	1	35310556	Eng. Oil Filter
			1	6	1	35310549	Eng. Fuel Filter
			1	6	1	35607605	Eng. Water Filter
For models where air filter housings have air intake vents instead of a circular opening					1	22402242	Sep. Filter
HP850WGM	A 35095439		2	4	2	35330133	Comp. Oil Filter
XP900WGM	B 35081082		2	2	2	35123520	Comp. Saf. Air Filter
P1100WGM	C 35079961		2	2	2	35123512	Comp. Pri. Air Filter
107081 (HP850)*			1	4	1	35290626	Eng. Oil Filter
107081 (XP900)*			1	6	1	35290618	Eng. Fuel Strainer
107985 (P1100)*			1	6	1	35290600	Eng. Fuel Filter
*For models with canister style oil filters					1	22402432	Sep. Filter
HP850WGM	A 35095348		2	4	2	35330133	Comp. Oil Filter
XP900WGM	B 35081025		2	2	2	35109271	Comp. Saf. Air Filter
P1100WGM	C 35061282		2	2	2	35109263	Comp. Pri. Air Filter
HP850 up thru 107081			1	4	1	35290626	Eng. Oil Filter
XP900 up thru 107081			1	6	1	35290618	Eng. Fuel Strainer
P1100 up thru 107985			1	6	1	35290600	Eng. Fuel Filter
					1	22402432	Sep. Filter
HP850WGM	A 35095447		2	4	2	35330133	Comp. Oil Filter
HP850AWGM	B 35081090		2	2	2	35123520	Comp. Saf. Air Filter
HP850BWGM	C 35079979		2	2	2	35123512	Comp. Pri. Air Filter
XP900WGM			1	4	1	35330901	Eng. Oil Filter
XP900AWGM			1	6	1	35290618	Eng. Fuel Strainer
XP900BWGM			1	6	1	35290600	Eng. Fuel Filter
P1100WGM					1	22402432	Sep. Filter
P1100AWGM							
P1100BWGM							

Model	Kit Part #	Kit Hours	Quantities			Contents	
			A	B	C	Part #	Description
107081 (HP850)*							
107081 (XP900)*							
107985 (P1100)*							
*For models with spin-on style engine oil filters							
XP900WCAT	A 36002012		2	4	2	36860336	Comp. Oil Filter
XHP900SCAT	B 36002020		4	4	4	36876019	Comp. Saf. Air Filter
	C 36002038		4	4	4	36867786	Comp. Pri. Air Filter
			1	4	1	35362235	Eng. Oil Filter
			1	6	1	35362243	Eng. Sec. Fuel Filter
			1	6	1	35362250	Eng. Pri. Fuel Filter
			1	6	1	35362268	Eng. Water Filter
					1	22402242	Sep. Filter
XHP900AWCAT	A 36020204		2	4	2	36860336	Comp. Oil Filter
XHP1070WCAT	B 36020212		2	2	2	36864361	Comp. Pri. Air Filter
	C 36020220		2	2	2	36864379	Comp. Saf. Air Filter
			1	4	1	35362235	Eng. Oil Filter
			1	6	1	35362243	Eng. Fuel Filter
			1	6	1	35362250	Eng. Fuel Filter
			1	6	1	35362268	Eng. Water Filter
					1	22402242	Sep. Filter
XHP1070AWCAT	A 36066363		2	4	2	36860336	Comp. Oil Filter
XHP1170WCAT	B 36066371		2	2	2	36864361	Comp. Pri. Air Filter
	C 36066389		2	2	2	36864379	Comp. Saf. Air Filter
			1	4	1	35362235	Eng. Oil Filter
			1	6	1	22090526	Eng. Sec. Fuel Filter
			1	6	1	22090534	Eng. Pri. Fuel Filter
			1	6	1	35362268	Eng. Water Filter
					1	22402242	Sep. Filter
XHP1170WCU	A 36065001		2	4	2	36860336	Comp. Oil Filter
	B 36065019		2	2	2	36864361	Comp. Pri. Air Filter
	C 36065027		2	2	2	36864379	Comp. Saf. Air Filter
			1	4	1	54662028	Eng. Oil Filter
			1	6	1	54662036	Eng. Fuel Filter
			1	6	1	54662051	Eng. Water Filter
					1	22402242	Sep. Filter
HP1000WCU	A 35099019		2	4	2	36897346	Comp. Oil Filter
XP1200WCU	B 35099027		3	3	3	36867786	Comp. Pri. Air Filter
	C 35099035		3	3	3	36876019	Comp. Saf. Air Filter
			1	6	1	35357268	Eng. Fuel Filter
			1	6	1	35357276	Eng. Water Filter
					1	22402317	Sep. Filter
			1	4	1	35378546	Eng. Oil Filter
HP1000AWCU	A 36007292		2	4	2	36897346	Comp. Oil Filter
XP1200AWCU	B 36007300		2	2	2	36867786	Element, Primary

Model	Kit Part #	Kit Hours	Quantities			Contents	
			A	B	C	Part #	Description
P1300AWCU	C 36007318		2	2	2	35123512	Element, Primary
			2	2	2	36876019	Element, Safety
			2	2	2	35123520	Element, Safety
			1	4	1	35357243	Element, Oil
			1	4	1	35357250	Filter, Oil
			2	6	2	35357268	Eng. Fuel Filter
			1	6	1	35375914	Eng. Water Filter
					1	22402317	Sep. Filter
HP1000BWCU	A 36020238		2	4	2	36897346	Comp. Oil Filter
XP1200BWCU	B 36020246		2	2	2	36864361	Comp. Pri. Air Filter
P1300BWCU	C 36020253		2	2	2	36864379	Comp. Saf. Air Filter
			1	4	1	35357243	Element, Oil
			1	4	1	35357250	Filter, Oil
			1	6	1	35357268	Eng. Fuel Filter
			1	6	1	35375914	Eng. Water Filter
For models with dual engine oil filters					1	22402317	Sep. Filter
HP1000BWCU	A 36022788		2	4	2	36897346	Comp. Oil Filter
HP1000CWCU	B 36022796		2	2	2	36864361	Comp. Pri. Air Filter
XP1200BWCU	C 36022812		2	2	2	36864379	Comp. Saf. Air Filter
XP1200CWCU			1	4	1	35378546	Eng. Oil Filter
P1300BWCU			1	6	1	35357268	Eng. Fuel Filter
P1300CWCU			1	6	1	35375914	Eng. Water Filter
For models with single engine oil filters					1	22402317	Sep. Filter
HP1300WGM	A 35095454		1	2	1	35330125	Comp. Oil Filter
XP1400WGM	B 35081108		2	2	2	35298108	Comp. Pri. Air Filter
P1600WGM	C 35060698		2	2	2	35298116	Comp. Saf. Air Filter
			1	4	1	35290626	Eng. Oil Filter
			1	6	1	35290618	Eng. Fuel Strainer
			1	6	1	35290600	Eng. Fuel Filter
For models with canister style engine oil filters					1	22402473	Sep. Filter
HP1300WGM	A 35095462		1	2	1	35330125	Comp. Oil Filter
HP1300AWGM	B 35081116		2	2	2	35298108	Comp. Pri. Air Filter
HP1300BWGM	C 35079987		2	2	2	35298116	Comp. Saf. Air Filter
XP1400WGM			1	4	1	35330901	Eng. Oil Filter
XP1400AWGM			1	6	1	35290618	Eng. Fuel Strainer
XP1400BWGM			1	6	1	35290600	Eng. Fuel Filter
P1600WGM					1	22402473	Sep. Filter
P1600AWGM							
P1600BWGM							
For models with spin-on style engine oil filters							
HP1300WCU	A 35096874		2	4	2	36897346	Comp. Oil Filter
XP1400WCU	B 35096866		2	2	2	36867786	Element, Primary
P1600WCU	C 35096858		2	2	2	35123512	Element, Primary
			2	2	2	36876019	Element, Safety

Model	Kit Part #	Kit Hours	Quantities			Contents	
			A	B	C	Part #	Description
			2	2	2	35123520	Element, Safety
			1	4	1	35357243	Element, Oil
			1	4	1	35357250	Filter, Oil
			2	6	2	35357268	Eng. Fuel Filter
			1	6	1	35375914	Eng. Water Filter
					1	22402317	Sep. Filter
HP1000BWCU	A 36020238		2	4	2	36897346	Comp. Oil Filter
HP1300AWCU	B 36020246		2	2	2	36864361	Comp. Pri. Air Filter
XP1400AWCU	C 36020261		2	2	2	36864379	Comp. Saf. Air Filter
P1600AWCU			1	4	1	35357243	Element Oil
			1	4	1	35357250	Filter, Oil
			1	6	1	35357268	Eng. Fuel Filter
			1	6	1	35375914	Eng. Water Filter
For models with dual engine oil filters					1	22402317	Sep. Filter
HP1300AWCU	A 36022788		2	2	2	36897346	Comp. Oil Filter
HP1300BWCU	B 36022796		2	2	2	36864361	Comp. Pri. Air Filter
XP1400AWCU	C 36022804		2	2	2	36864379	Comp. Saf. Air Filter
XP1400BWCU			1	4	1	35378546	Eng. Oil Filter
P1600AWCU			1	6	1	35357268	Eng. Fuel Filter
P1600BWCU			1	6	1	35375914	Eng. Water Filter
					1	22402317	Sep. Filter
HP1300CWCU	A 36064970		2	4	2	36897346	Comp. Oil Filter
HP1600CWCU	B 36064988		2	2	2	36864361	Comp. Pri. Air Filter
	C 36064996		2	2	2	36864379	Comp. Saf. Air Filter
			1	4	1	54662028	Eng. Oil Filter
			1	6	1	54662036	Eng. Fuel Filter
			1	6	1	54662051	Eng. Water Filter
					1	22402317	Sep. Filter

MAINTENANCE KITS

Model	Serial Code	Kit Part #	Maintenance Interval	QTY	Consumable Part #	Description
P185GWJD Re-Rate	B73	44000917	500 hrs/6 mos.			
				1	22476683	Decal, Oil and Filter Change
				1	22556138	Element, 5 Micron
				1	22545867	Element, Oil Filter
				2	35393685	Element, Primary
				2	35393651	Element, Safety
				1	36897353	Filter, Oil
		44000933	1000 hrs/12mos.			
				1	22476683	Decal, Oil and Filter Change
				1	22556138	Element, 5 Micron
				1	22545867	Element, Oil Filter
				2	35393685	Element, Primary
				2	35393651	Element, Safety
				1	54625942	Element, Sep Tank 1st
				1	36897353	Filter, Oil
P425WJD-T3	C46	36089647	500 hrs/6 mos.			
				1	22476683	Decal, Oil and Filter Change
				1	22206197	Element, Fuel Filter
				1	22206148	Element, Oil Filter
				1	36897346	Element, Oil Filter
				2	54717145	Element, Primary
				1	54717152	Element, Safety
				1	54468178	Fuel/Water Elem
		36089662	1000 hrs/12mos.			
				1	22476683	Decal, Oil and Filter Change
				1	22206197	Element, Fuel Filter
				1	22206148	Element, Oil Filter
				1	36897346	Element, Oil Filter
				2	54717145	Element, Primary
				2	54717152	Element, Safety
				1	22111975	Element, Separator

Model	Serial Code	Kit Part #	Maintenance Interval	QTY	Consumable Part #	Description
				1	54468178	Fuel/Water Elem
P425/HP375WCU t4i	E85	46615039	500 hrs/6 mos.			
				1	54717145	Air Element Primary Airend
				1	54717152	Air Element Safety Airend
				1	46595499	Air Filter Primary Direct Flow
				1	46595500	Air Filter Secondary Direct Flow
				1	22476683	Decal, Oil and Filter Change
				1	46587383	Engine Fuel Element
				1	46558720	Engine Lube Element
				1	36897346	Lube Element
				1	46554959	Water/Fuel Filter Element
		46615040	1000 hrs/12mos.			
				1	54717145	Air Element Primary Airend
				1	54717152	Air Element Safety Airend
				1	46595499	Air Filter Primary Direct Flow
				1	46595500	Air Filter Secondary Direct Flow
				1	46595859	Crankcase Filter
				1	22476683	Decal, Oil and Filter Change
				1	22111975	Element, Separator
				1	46587383	Engine Fuel Element
				1	46558720	Engine Lube Element
				1	36897346	Lube Element
				1	46554959	Water/Fuel Filter Element
P600XP535WCU-t4i	E90	46615479	500 hrs/6 mos.			
				1	22476683	Decal, Oil and Filter Change

Model	Serial Code	Kit Part #	Maintenance Interval	QTY	Consumable Part #	Description
				1	36897346	Element, Oil Filter
				1	54717145	Element, Primary
				1	22119168	Element, Primary
				1	54717152	Element, Safety
				1	22119176	Element, Safety
				1	46558720	Filter, Engine Lube Oil
				1	46554959	Filter, Fuel Prefilter w/ Water Separator
				1	46558719	Filter, Fuel Primary
		46615480	1000 hrs/12mos.			
				1	22476683	Decal, Oil and Filter Change
				1	36897346	Element, Oil Filter
				1	54717145	Element, Primary
				1	22119168	Element, Primary
				1	54717152	Element, Safety
				1	22119176	Element, Safety
				1	22111975	Element, Separator
				1	46567299	Filter Element, Crankcase Breather
				1	46558720	Filter, Engine Lube Oil
				1	46554959	Filter, Fuel Prefilter w/ Water Separator
				1	46558719	Filter, Fuel Primary
HP375CWIR	C47	36089647	500 hrs/6 mos.			
				1	22476683	Decal, Oil and Filter Change
				1	22206197	Element, Fuel Filter
				1	22206148	Element, Oil Filter
				1	36897346	Element, Oil Filter
				2	54717145	Element, Primary
				1	54717152	Element, Safety
				1	54468178	Fuel/Water Elem
		36089662	1000 hrs/12mos.			
				1	22476683	Decal, Oil and Filter Change

Model	Serial Code	Kit Part #	Maintenance Interval	QTY	Consumable Part #	Description
				1	22206197	Element, Fuel Filter
				1	22206148	Element, Oil Filter
				1	36897346	Element, Oil Filter
				2	54717145	Element, Primary
				2	54717152	Element, Safety
				1	22111975	Element, Separator
				1	54468178	Fuel/Water Elem
HP450VHP400WCU t4i	E91	46615479	500 hrs/6 mos.			
				1	22476683	Decal, Oil and Filter Change
				1	36897346	Element, Oil Filter
				1	54717145	Element, Primary
				1	22119168	Element, Primary
				1	54717152	Element, Safety
				1	22119176	Element, Safety
				1	46558720	Filter, Engine Lube Oil
				1	46554959	Filter, Fuel Prefilter w/ Water Separator
				1	46558719	Filter, Fuel Primary
		46615480	1000 hrs/12mos.			
				1	22476683	Decal, Oil and Filter Change
				1	36897346	Element, Oil Filter
				1	54717145	Element, Primary
				1	22119168	Element, Primary
				1	54717152	Element, Safety
				1	22119176	Element, Safety
				1	22111975	Element, Separator
				1	46567299	Filter Element, Crankcase Breather
				1	46558720	Filter, Engine Lube Oil
				1	46554959	Filter, Fuel Prefilter w/ Water Separator
				1	46558719	Filter, Fuel Primary
XP375WJD-T3	C48	36089647	500 hrs/6 mos.			

Model	Serial Code	Kit Part #	Maintenance Interval	QTY	Consumable Part #	Description
				1	22476683	Decal, Oil and Filter Change
				1	22206197	Element, Fuel Filter
				1	22206148	Element, Oil Filter
				1	36897346	Element, Oil Filter
				2	54717145	Element, Primary
				1	54717152	Element, Safety
				1	54468178	Fuel/Water Elem
		36089662	1000 hrs/12mos.			
				1	22476683	Decal, Oil and Filter Change
				1	22206197	Element, Fuel Filter
				1	22206148	Element, Oil Filter
				1	36897346	Element, Oil Filter
				2	54717145	Element, Primary
				2	54717152	Element, Safety
				1	22111975	Element, Separator
				1	54468178	Fuel/Water Elem
P185WIR-FLEX	D07	44000917	500 hrs/6 mos.			
				1	22476683	Decal, Oil and Filter Change
				1	22556138	Element, 5 Micron
				1	22545867	Element, Oil Filter
				2	35393685	Element, Primary
				2	35393651	Element, Safety
				1	36897353	Filter, Oil
		44000933	1000 hrs/12mos.			
				1	22476683	Decal, Oil and Filter Change
				1	22556138	Element, 5 Micron
				1	22545867	Element, Oil Filter
				2	35393685	Element, Primary
				2	35393651	Element, Safety
				1	54625942	Element, Sep Tank Ist
				1	36897353	Filter, Oil
P185WJD-CP	D08	44000917	500 hrs/6 mos.			
				1	22476683	Decal, Oil and Filter Change

Model	Serial Code	Kit Part #	Maintenance Interval	QTY	Consumable Part #	Description
				1	22556138	Element, 5 Micron
				1	22545867	Element, Oil Filter
				2	35393685	Element, Primary
				2	35393651	Element, Safety
				1	36897353	Filter, Oil
		44000933	1000 hrs/12mos.			
				1	22476683	Decal, Oil and Filter Change
				1	22556138	Element, 5 Micron
				1	22545867	Element, Oil Filter
				2	35393685	Element, Primary
				2	35393651	Element, Safety
				1	54625942	Element, Sep Tank Ist
				1	36897353	Filter, Oil
P185FWJD ABT AIRSOURCE	D09	44000917	500 hrs/6 mos.			
				1	22476683	Decal, Oil and Filter Change
				1	22556138	Element, 5 Micron
				1	22545867	Element, Oil Filter
				2	35393685	Element, Primary
				2	35393651	Element, Safety
				1	36897353	Filter, Oil
		44000933	1000 hrs/12mos.			
				1	22476683	Decal, Oil and Filter Change
				1	22556138	Element, 5 Micron
				1	22545867	Element, Oil Filter
				2	35393685	Element, Primary
				2	35393651	Element, Safety
				1	54625942	Element, Sep Tank Ist
				1	36897353	Filter, Oil
P185WJDR-T4I	D11	44000917	500 hrs/6 mos.			
				1	22476683	Decal, Oil and Filter Change
				1	22556138	Element, 5 Micron
				1	22545867	Element, Oil Filter
				2	35393685	Element, Primary
				2	35393651	Element, Safety
				1	36897353	Filter, Oil

Model	Serial Code	Kit Part #	Maintenance Interval	QTY	Consumable Part #	Description
		44000933	1000 hrs/12mos.			
				1	22476683	Decal, Oil and Filter Change
				1	22556138	Element, 5 Micron
				1	22545867	Element, Oil Filter
				2	35393685	Element, Primary
				2	35393651	Element, Safety
				1	54625942	Element, Sep Tank 1st
				1	36897353	Filter, Oil
XP375WCU fx t3	E81	46605479	500 hrs/6 mos.			
				2	54717145	Air Element Primary Eng - A/E
				2	54717152	Air Element Safety Eng - A/E
				1	22476683	Decal, Oil and Filter Change
				1	46598799	Eng. Fuel Element
				1	46558720	Eng. Lube Element
				1	36897346	Lube Element
				1	23061666	Water/Fuel Filter Element
		46605499	1000 hrs/12mos.			
				2	54717145	Air Element
				2	54717152	Air Element
				1	22476683	Decal, Oil And Filter Change
				1	22111975	Element, Separator
				1	46598799	Eng. Fuel Element
				1	46558720	Eng. Lube Element
				1	36897346	Lube Element
				1	23061666	Water/Fuel Filter Element
HP375WCU fx T3	E82	46605479	500 hrs/6 mos.			
				2	54717145	Air Element Primary Eng - A/E
				2	54717152	Air Element Safety Eng - A/E
				1	22476683	Decal, Oil and Filter Change
				1	46598799	Eng. Fuel Element
				1	46558720	Eng. Lube Element

Model	Serial Code	Kit Part #	Maintenance Interval	QTY	Consumable Part #	Description
				1	36897346	Lube Element
				1	23061666	Water/Fuel Filter Element
		46605499	1000 hrs/12mos.			
				2	54717145	Air Element
				2	54717152	Air Element
				1	22476683	Decal, Oil And Filter Change
				1	22111975	Element, Separator
				1	46598799	Eng. Fuel Element
				1	46558720	Eng. Lube Element
				1	36897346	Lube Element
				1	23061666	Water/Fuel Filter Element
AIRSOURCE+JD-T4I	D68	36096212	500 hrs/6 mos.			
				1	22476683	Decal, Oil and Filter Change
				1	22556138	Element, 5 Micron
				1	22436323	Element, A/E Oil Filter
				1	22545867	Element, Oil Filter
				2	35393685	Element, Primary
				2	35393651	Element, Safety
				1	36845493	Filter, Fuel .7Mm Media
		36096238	1000 hrs/12mos.			
				1	22476683	Decal, Oil and Filter Change
				1	22556138	Element, 5 Micron
				1	22436323	Element, A/E Oil Filter
				1	22436331	Element, A/E Separator
				1	22545867	Element, Oil Filter
				2	35393685	Element, Primary
				2	35393651	Element, Safety
				1	36845493	Filter, Fuel .7Mm Media
P185WJD-T4I	D75	46612064	250 hrs			
				1	22556138	Element, 5 Micron
				1	22545867	Element, Oil Filter
		46584759	500 hrs/6 mos.			

Model	Serial Code	Kit Part #	Maintenance Interval	QTY	Consumable Part #	Description
				1	22556138	Element, 5 Micron
				1	22545867	Element, Oil Filter
				1	23279078	Element, Oil Filter W/ Bypass M27X2 Thread
				2	35393685	Element, Primary
		44034015	1000 hrs/12mos.			
				1	46543831	Belt, Fan
				1	22556138	Element, 5 Micron
				1	22436331	Element, A/E Separator
				1	22545867	Element, Oil Filter
				1	23279078	Element, Oil Filter W/ Bypass M27X2 Thread
				2	35393685	Element, Primary
C185WKUB-T2	D80	46584760	500 hrs/6 mos.			
				1	22496921	Belt, Fan
				1	22532378	Element, Fuel Fitr 10 Mic
				1	23279078	Element, Oil Filter W/ Bypass M27X2 Thread
				1	35393685	Element, Primary
				1	22496905	Filter, Oil
		44034023	1000 hrs/12mos.			
				1	22496921	Belt, Fan
				1	22436331	Element, A/E Separator
				1	22532378	Element, Fuel Fitr 10 Mic
				1	23279078	Element, Oil Filter w/ Bypass M27X2 Thread
				2	35393685	Element, Primary
				1	22496905	Filter, Oil
C185WKUB-T4i	D95	46584819	500 hrs/6 mos.			
				1	22496921	Belt, Fan
				1	22532378	Element, Fuel Fitr 10 Mic
				1	23279078	Element, Oil Filter W/ Bypass M27X2 Thread

Model	Serial Code	Kit Part #	Maintenance Interval	QTY	Consumable Part #	Description
				1	35393685	Element, Primary
				1	22496905	Filter, Oil
		44034023	1000 hrs/12mos.			
				1	22496921	Belt, Fan
				1	22436331	Element, A/E Separator
				1	22532378	Element, Fuel Fitr 10 Mic
				1	23279078	Element, Oil Filter w/ Bypass M27X2 Thread
				1	35393685	Element, Primary
				1	22496905	Filter, Oil
C185WKUB-FX-T4i	F08	46584819	500 hrs/6 mos.			
				1	22496921	Belt, Fan
				1	22532378	Element, Fuel Fitr 10 Mic
				1	23279078	Element, Oil Filter W/ Bypass M27X2 Thread
				1	35393685	Element, Primary
				1	22496905	Filter, Oil
		44034023	1000 hrs/12mos.			
				1	22496921	Belt, Fan
				1	22436331	Element, A/E Separator
				1	22532378	Element, Fuel Fitr 10 Mic
				1	23279078	Element, Oil Filter w/ Bypass M27X2 Thread
				1	35393685	Element, Primary
				1	22496905	Filter, Oil
P185WJDU-T4I	D99	46612064	250 hrs			
				1	22556138	Element, 5 Micron
				1	22545867	Element, Oil Filter
		46584759	500 hrs/6 mos.			
				1	22556138	Element, 5 Micron
				1	22545867	Element, Oil Filter
				1	23279078	Element, Oil Filter w/ Bypass M27X2 Thread
				2	35393685	Element, Primary

Model	Serial Code	Kit Part #	Maintenance Interval	QTY	Consumable Part #	Description
		44034015	1000 hrs/12mos.			
				1	46543831	Belt, Fan
				1	22556138	Element, 5 Micron
				1	22436331	Element, A/E Separator
				1	22545867	Element, Oil Filter
				1	23279078	Element, Oil Filter w/ Bypass M27X2 Thread
				2	35393685	Element, Primary
P185WDZ-T4F	F24	46652656	500 hr/6 mos.			
				2	46625802	Element, Primary
				1	46650102	Element, Oil Filter
				1	46651560	Final Fuel Filter
				1	46641561	Fuel/Water Separator
				1	46651562	Element, Engine Oil Filter
				1	22476683	Decal, Oil and Filter Change
		46652657	1000 hrs/12 mos.			
				2	46625802	Element, Primary
				1	46650102	Element, Oil Filter
				1	46651560	Final Fuel Filter
				1	46651561	Fuel/Water Separator
				1	46651562	Element, Engine Oil Filter
				1	46645701	Element, Sep
				1	22476683	Decal, Oil and Filter Change
P185WDO-T4F	F63	46670533	500 hr/6 mos.			
				2	46625802	Filter Element, Main
				1	46650102	Filter Element, Oil
				1	46664396	Fuel Filter
				1	46668934	Filter, Engine Oil
				1	22476683	Decal, Oil and Filter Change
		46652657	1000 hrs/12 mos.			
				2	46625802	Filter Element, Main
				1	46650102	Filter Element, Oil
				1	46664396	Fuel Filter

Model	Serial Code	Kit Part #	Maintenance Interval	QTY	Consumable Part #	Description
				1	46668934	Filter, Engine Oil
				1	46652735	Filter Element, Oil Separator
				1	22476683	Decal, Oil and Filter change
C185WDZ-T4F	F23	46652656	500 hr/6 mos.			
				2	46625802	Element, Primary
				1	46650102	Element, Oil Filter
				1	46651560	Final Fuel Filter
				1	46641561	Fuel/Water Separator
				1	46651562	Element, Engine Oil Filter
				1	22476683	Decal, Oil and Filter Change
		46652657	1000 hrs/12 mos.			
				2	46625802	Element, Primary
				1	46650102	Element, Oil Filter
				1	46651560	Final Fuel Filter
				1	46651561	Fuel/Water Separator
				1	46651562	Element, Engine Oil Filter
				1	46645701	Element, Sep.
				1	22476683	Decal, Oil and Filter Change
C185KUBG	F45	46664143	200 hrs			
				1	22496905	Filter, Oil Engine
				1	22476683	Decal, Oil and Filter Change
		46664046	500 hr/6 mos.			
				2	46625802	Element, Primary
				1	46650102	Element, Oil Filter
				1	22476683	Decal, Oil and Filter Change
		46664047	1000 hr/12 mos.			
				2	46625802	Element, Primary
				1	22496905	Filter, Oil Engine
				1	46650102	Element, Oil Filter
				1	46652735	Element, Sep
				1	46664572	Valve, PCV
				1	22476683	Decal, Oil and Filter Change
P125WJDU-T4i	E86	46612064	250 hrs			

Model	Serial Code	Kit Part #	Maintenance Interval	QTY	Consumable Part #	Description
				1	22556138	Element, 5 Micron
				1	22545867	Element, Oil Filter
		46584759	500 hrs/6 mos.			
				1	22556138	Element, 5 Micron
				1	22545867	Element, Oil Filter
				1	23279078	Element, Oil Filter w/ Bypass M27X2 Thread
				2	35393685	Element, Primary
		44034015	1000 hrs/12mos.			
				1	46543831	Belt, Fan
				1	22556138	Element, 5 Micron
				1	22436331	Element, A/E Separator
				1	22545867	Element, Oil Filter
				1	23279078	Element, Oil Filter w/ Bypass M27X2 Thread
				2	35393685	Element, Primary
SUPER STD VHP750 D W CU	B69	22354385	500 hrs/6 mos.			
				2	89288971	Element, Main
				2	36860336	Element, Oil Filter
				1	22177711	Filter, Fuel W/ Sensor
				1	22177737	Filter, Oil
				1	22177745	Filter, Water
		22354377	1000 hrs/12mos.			
				2	36860336	Element, Oil Filter
				2	89288971	Element, Main
				2	89288989	Element, Safety
				1	22177737	Filter, Oil
				1	22177711	Filter, Fuel W/ Sensor
				1	22177745	Filter, Water
SUPER STD MHP825 C W CU	B70	44008506	500 hrs/6 mos.			
				1	22476683	Decal, Oil and Filter Change
				2	89288971	Element, Main
				2	36860336	Element, Oil Filter
				1	22765325	Filter, Fuel
				1	22637904	Filter, Fuel w/ Water Sep

Model	Serial Code	Kit Part #	Maintenance Interval	QTY	Consumable Part #	Description
				1	22177737	Filter, Oil
				1	22345748	Filter, Water
		44008514	1000 hrs/12mos.			
				1	22476683	Decal, Oil and Filter Change
				2	89288971	Element, Main
				2	36860336	Element, Oil Filter
				2	89288989	Element, Safety
				1	22765325	Filter, Fuel
				1	22637904	Filter, Fuel w/ Water Sep
				1	22177737	Filter, Oil
				1	22345748	Filter, Water
SUPER STD HP915 B W CU	B71	44008506	500 hrs/6 mos.			
				1	22476683	Decal, Oil and Filter Change
				2	89288971	Element, Main
				2	36860336	Element, Oil Filter
				1	22765325	Filter, Fuel
				1	22637904	Filter, Fuel w/ Water Sep
				1	22177737	Filter, Oil
				1	22345748	Filter, Water
		44008514	1000 hrs/12mos.			
				1	22476683	Decal, Oil and Filter Change
				2	89288971	Element, Main
				2	36860336	Element, Oil Filter
				2	89288989	Element, Safety
				1	22765325	Filter, Fuel
				1	22637904	Filter, Fuel w/ Water Sep
				1	22177737	Filter, Oil
				1	22345748	Filter, Water
SPER STD XP1000 B W CU	B72	44008506	500 hrs/6 mos.			
				1	22476683	Decal, Oil and Filter Change
				2	89288971	Element, Main
				2	36860336	Element, Oil Filter
				1	22765325	Filter, Fuel
				1	22637904	Filter, Fuel w/ Water Sep

Model	Serial Code	Kit Part #	Maintenance Interval	QTY	Consumable Part #	Description
				1	22177737	Filter, Oil
				1	22345748	Filter, Water
		44008514	1000 hrs/12mos.			
				1	22476683	Decal, Oil and Filter Change
				2	89288971	Element, Main
				2	36860336	Element, Oil Filter
				2	89288989	Element, Safety
				1	22765325	Filter, Fuel
				1	22637904	Filter, Fuel w/ Water Sep
				1	22177737	Filter, Oil
				1	22345748	Filter, Water
XHP700AWCU	B79	22354385	500 hrs/6 mos.			
				2	89288971	Element, Main
				2	36860336	Element, Oil Filter
				1	22177711	Filter, Fuel W/ Sensor
				1	22177737	Filter, Oil
				1	22177745	Filter, Water
		22354377	1000 hrs/12mos.			
				2	89288971	Element, Main
				2	36860336	Element, Oil Filter
				2	89288989	Element, Safety
				1	22177711	Filter, Fuel W/ Sensor
				1	22177737	Filter, Oil
				1	22177745	Filter, Water
SHP750WCU	B80	22354385	500 hrs/6 mos.			
				2	89288971	Element, Main
				2	36860336	Element, Oil Filter
				1	22177711	Filter, Fuel W/ Sensor
				1	22177737	Filter, Oil
				1	22177745	Filter, Water
		22354377	1000 hrs/12mos.			
				2	89288971	Element, Main
				2	36860336	Element, Oil Filter
				2	89288989	Element, Safety
				1	22177711	Filter, Fuel W/ Sensor

Model	Serial Code	Kit Part #	Maintenance Interval	QTY	Consumable Part #	Description
				1	22177737	Filter, Oil
				1	22177745	Filter, Water
SHP750A W CAT	B95	22354310	500 hrs/6 mos.			
				1	22351654	Element Coolant
				1	22284376	Element, Fuel Sec
				1	35362235	Element, Lube 3406
				2	89288971	Element, Main
				2	36860336	Element, Oil Filter
				1	22090534	Element, Primary Fuel
		22354328	1000 hrs/12mos.			
				1	22351654	Element Coolant
				1	22284376	Element, Fuel Sec
				1	35362235	Element, Lube 3406
				2	89288971	Element, Main
				2	36860336	Element, Oil Filter
				1	22090534	Element, Primary Fuel
				2	89288989	Element, Safety
XHP700A W CAT	B96	22354310	500 hrs/6 mos.			
				1	22351654	Element Coolant
				1	22284376	Element, Fuel Sec
				1	35362235	Element, Lube 3406
				2	89288971	Element, Main
				2	36860336	Element, Oil Filter
				1	22090534	Element, Primary Fuel
		22354328	1000 hrs/12mos.			
				1	22351654	Element Coolant
				1	22284376	Element, Fuel Sec
				1	35362235	Element, Lube 3406
				2	89288971	Element, Main
				2	36860336	Element, Oil Filter
				1	22090534	Element, Primary Fuel
				2	89288989	Element, Safety
VHP750WCAT-T3	B97	44008536	500 hrs/6 mos.			

Model	Serial Code	Kit Part #	Maintenance Interval	QTY	Consumable Part #	Description
				1	22476683	Decal, Oil and Filter Change
				1	22351654	Element Coolant
				1	22284376	Element, Fuel Sec
				1	35362235	Element, Lube 3406
				2	89288971	Element, Main
				2	36860336	Element, Oil Filter
				1	22730014	Filter, Assy. w/ Seal Fuel Water Cat Tier
		44008571	1000 hrs/12mos.			
				1	22476683	Decal, Oil and Filter Change
				1	22351654	Element Coolant
				1	22284376	Element, Fuel Sec
				1	35362235	Element, Lube 3406
				2	89288971	Element, Main
				2	36860336	Element, Oil Filter
				2	89288989	Element, Safety
				1	22730014	Filter, Assy. w/ Seal Fuel Water Cat Tier
MHP825 W CAT	B98	22354310	500 hrs/6 mos.			
				1	22351654	Element Coolant
				1	22284376	Element, Fuel Sec
				1	35362235	Element, Lube 3406
				2	89288971	Element, Main
				2	36860336	Element, Oil Filter
				1	22090534	Element, Primary Fuel
		22354328	1000 hrs/12mos.			
				1	22351654	Element Coolant
				1	22284376	Element, Fuel Sec
				1	35362235	Element, Lube 3406
				2	89288971	Element, Main
				2	36860336	Element, Oil Filter
				1	22090534	Element, Primary Fuel
				2	89288989	Element, Safety

Model	Serial Code	Kit Part #	Maintenance Interval	QTY	Consumable Part #	Description
XHP750C W CAT	C01	22354310	500 hrs/6 mos.			
				1	22351654	Element Coolant
				1	22284376	Element, Fuel Sec
				1	35362235	Element, Lube 3406
				2	89288971	Element, Main
				2	36860336	Element, Oil Filter
				1	22090534	Element, Primary Fuel
		22354328	1000 hrs/12mos.			
				1	22351654	Element Coolant
				1	22284376	Element, Fuel Sec
				1	35362235	Element, Lube 3406
				2	89288971	Element, Main
				2	36860336	Element, Oil Filter
				1	22090534	Element, Primary Fuel
				2	89288989	Element, Safety
SHP825 W CAT	C02	22354310	500 hrs/6 mos.			
				1	22351654	Element Coolant
				1	22284376	Element, Fuel Sec
				1	35362235	Element, Lube 3406
				2	89288971	Element, Main
				2	36860336	Element, Oil Filter
				1	22090534	Element, Primary Fuel
		22354328	1000 hrs/12mos.			
				1	22351654	Element Coolant
				1	22284376	Element, Fuel Sec
				1	35362235	Element, Lube 3406
				2	89288971	Element, Main
				2	36860336	Element, Oil Filter
				1	22090534	Element, Primary Fuel
				2	89288989	Element, Safety
VHP750 W CAT	C03	22354310	500 hrs/6 mos.			
				1	22351654	Element Coolant
				1	22284376	Element, Fuel Sec

Model	Serial Code	Kit Part #	Maintenance Interval	QTY	Consumable Part #	Description
				1	35362235	Element, Lube 3406
				2	89288971	Element, Main
				2	36860336	Element, Oil Filter
				1	22090534	Element, Primary Fuel
		22354328	1000 hrs/12mos.			
				1	22351654	Element Coolant
				1	22284376	Element, Fuel Sec
				1	35362235	Element, Lube 3406
				2	89288971	Element, Main
				2	36860336	Element, Oil Filter
				1	22090534	Element, Primary Fuel
				2	89288989	Element, Safety
MHP825 W CAT	C04	22354310	500 hrs/6 mos.			
				1	22351654	Element Coolant
				1	22284376	Element, Fuel Sec
				1	35362235	Element, Lube 3406
				2	89288971	Element, Main
				2	36860336	Element, Oil Filter
				1	22090534	Element, Primary Fuel
		22354328	1000 hrs/12mos.			
				1	22351654	Element Coolant
				1	22284376	Element, Fuel Sec
				1	35362235	Element, Lube 3406
				2	89288971	Element, Main
				2	36860336	Element, Oil Filter
				1	22090534	Element, Primary Fuel
				2	89288989	Element, Safety
XP950 W CAT	C05	22354310	500 hrs/6 mos.			
				1	22351654	Element Coolant
				1	22284376	Element, Fuel Sec
				1	35362235	Element, Lube 3406
				2	89288971	Element, Main
				2	36860336	Element, Oil Filter

Model	Serial Code	Kit Part #	Maintenance Interval	QTY	Consumable Part #	Description
				1	22090534	Element, Primary Fuel
		22354328	1000 hrs/12mos.			
				1	22351654	Element Coolant
				1	22284376	Element, Fuel Sec
				1	35362235	Element, Lube 3406
				2	89288971	Element, Main
				2	36860336	Element, Oil Filter
				1	22090534	Element, Primary Fuel
				2	89288989	Element, Safety
XHP750WCAT-T3	C44	44008536	500 hrs/6 mos.			
				1	22476683	Decal, Oil and Filter Change
				1	22351654	Element Coolant
				1	22284376	Element, Fuel Sec
				1	35362235	Element, Lube 3406
				2	89288971	Element, Main
				2	36860336	Element, Oil Filter
				1	22730014	Filter, Assy. w/ Seal Fuel Water Cat Tier
		44008571	1000 hrs/12mos.			
				1	22476683	Decal, Oil and Filter Change
				1	22351654	Element Coolant
				1	22284376	Element, Fuel Sec
				1	35362235	Element, Lube 3406
				2	89288971	Element, Main
				2	36860336	Element, Oil Filter
				2	89288989	Element, Safety
				1	22730014	Filter, Assy. w/ Seal Fuel Water Cat Tier
MHP825WCU-T3	C59	44008506	500 hrs/6 mos.			
				1	22476683	Decal, Oil and Filter Change
				2	89288971	Element, Main
				2	36860336	Element, Oil Filter
				1	22765325	Filter, Fuel

Model	Serial Code	Kit Part #	Maintenance Interval	QTY	Consumable Part #	Description
				1	22637904	Filter, Fuel w/ Water Sep
				1	22177737	Filter, Oil
				1	22345748	Filter, Water
		44008514	1000 hrs/12mos.			
				1	22476683	Decal, Oil and Filter Change
				2	89288971	Element, Main
				2	36860336	Element, Oil Filter
				2	89288989	Element, Safety
				1	22765325	Filter, Fuel
				1	22637904	Filter, Fuel w/ Water Sep
				1	22177737	Filter, Oil
				1	22345748	Filter, Water
HP915WCU-T3	C60	44008506	500 hrs/6 mos.			
				1	22476683	Decal, Oil and Filter Change
				2	89288971	Element, Main
				2	36860336	Element, Oil Filter
				1	22765325	Filter, Fuel
				1	22637904	Filter, Fuel w/ Water Sep
				1	22177737	Filter, Oil
				1	22345748	Filter, Water
		44008514	1000 hrs/12mos.			
				1	22476683	Decal, Oil and Filter Change
				2	89288971	Element, Main
				2	36860336	Element, Oil Filter
				2	89288989	Element, Safety
				1	22765325	Filter, Fuel
				1	22637904	Filter, Fuel w/ Water Sep
				1	22177737	Filter, Oil
				1	22345748	Filter, Water
XP1000WCU-T3	C61	44008506	500 hrs/6 mos.			
				1	22476683	Decal, Oil and Filter Change
				2	89288971	Element, Main
				2	36860336	Element, Oil Filter
				1	22765325	Filter, Fuel

Model	Serial Code	Kit Part #	Maintenance Interval	QTY	Consumable Part #	Description
				1	22637904	Filter, Fuel w/ Water Sep
				1	22177737	Filter, Oil
				1	22345748	Filter, Water
		44008514	1000 hrs/12mos.			
				1	22476683	Decal, Oil and Filter Change
				2	89288971	Element, Main
				2	36860336	Element, Oil Filter
				2	89288989	Element, Safety
				1	22765325	Filter, Fuel
				1	22637904	Filter, Fuel w/ Water Sep
				1	22177737	Filter, Oil
				1	22345748	Filter, Water
XHP750WCAT-ML-T3	D93	44008536	500 hrs/6 mos.			
				1	22476683	Decal, Oil and Filter Change
				1	22351654	Element Coolant
				1	22284376	Element, Fuel Sec
				1	35362235	Element, Lube 3406
				2	89288971	Element, Main
				2	36860336	Element, Oil Filter
				1	22730014	Filter, Assy. w/ Seal Fuel Water Cat Tier
		44008571	1000 hrs/12mos.			
				1	22476683	Decal, Oil and Filter Change
				1	22351654	Element Coolant
				1	22284376	Element, Fuel Sec
				1	35362235	Element, Lube 3406
				2	89288971	Element, Main
				2	36860336	Element, Oil Filter
				2	89288989	Element, Safety
				1	22730014	Filter, Assy. w/ Seal Fuel Water Cat Tier
XHP750WCAT-FX-T3	E14	44008183	50 hrs			
				2	36860336	Element, Oil Filter
				1	22765325	Filter, Fuel

Model	Serial Code	Kit Part #	Maintenance Interval	QTY	Consumable Part #	Description
				1	22637904	Filter, Fuel w/ Water Sep
				1	22177737	Filter, Oil
		44008536	500 hrs/6 mos.			
				1	22476683	Decal, Oil and Filter Change
				1	22351654	Element Coolant
				1	22284376	Element, Fuel Sec
				1	35362235	Element, Lube 3406
				2	89288971	Element, Main
				2	36860336	Element, Oil Filter
				1	22730014	Filter, Assy. w/ Seal Fuel Water Cat Tier
		44008571	1000 hrs/12mos.			
				1	22476683	Decal, Oil and Filter Change
				1	22351654	Element Coolant
				1	22284376	Element, Fuel Sec
				1	35362235	Element, Lube 3406
				2	89288971	Element, Main
				2	36860336	Element, Oil Filter
				2	89288989	Element, Safety
				1	22730014	Filter, Assy. w/ Seal Fuel Water Cat Tier
		44008589	2000 hrs/12 mos.			
				1	22476683	Decal, Oil and Filter Change
				1	22351654	Element Coolant
				1	22284376	Element, Fuel Sec
				1	35362235	Element, Lube 3406
				2	89288971	Element, Main
				2	36860336	Element, Oil Filter
				2	89288989	Element, Safety
				1	22958144	Element, Sep
				1	22730014	Filter, Assy. w/ Seal Fuel Water Cat Tier
		44008704	2000 hrs/12 mos.			

Model	Serial Code	Kit Part #	Maintenance Interval	QTY	Consumable Part #	Description
				1	22476683	Decal, Oil and Filter Change
				1	22351654	Element Coolant
				1	22284376	Element, Fuel Sec
				1	35362235	Element, Lube 3406
				2	89288971	Element, Main
				2	36860336	Element, Oil Filter
				2	89288989	Element, Safety
				1	22958201	Element, Separator
				1	22730014	Filter, Assy. w/ Seal Fuel Water Cat Tier
XHP750WCAT-EX-T3	E15	44008183	50 hrs			
				2	36860336	Element, Oil Filter
				1	22765325	Filter, Fuel
				1	22637904	Filter, Fuel w/ Water Sep
				1	22177737	Filter, Oil
		44008536	500 hrs/6 mos.			
				1	22476683	Decal, Oil and Filter Change
				1	22351654	Element Coolant
				1	22284376	Element, Fuel Sec
				1	35362235	Element, Lube 3406
				2	89288971	Element, Main
				2	36860336	Element, Oil Filter
				1	22730014	Filter, Assy. w/ Seal Fuel Water Cat Tier
		44008571	1000 hrs/12mos.			
				1	22476683	Decal, Oil and Filter Change
				1	22351654	Element Coolant
				1	22284376	Element, Fuel Sec
				1	35362235	Element, Lube 3406
				2	89288971	Element, Main
				2	36860336	Element, Oil Filter
				2	89288989	Element, Safety

Model	Serial Code	Kit Part #	Maintenance Interval	QTY	Consumable Part #	Description
				1	22730014	Filter, Assy. w/ Seal Fuel Water Cat Tier
		44008589	2000 hrs/12 mos.			
				1	22476683	Decal, Oil and Filter Change
				1	22351654	Element Coolant
				1	22284376	Element, Fuel Sec
				1	35362235	Element, Lube 3406
				2	89288971	Element, Main
				2	36860336	Element, Oil Filter
				2	89288989	Element, Safety
				1	22958144	Element, Sep
				1	22730014	Filter, Assy. w/ Seal Fuel Water Cat Tier
		44008704	2000 hrs/12 mos.			
				1	22476683	Decal, Oil and Filter Change
				1	22351654	Element Coolant
				1	22284376	Element, Fuel Sec
				1	35362235	Element, Lube 3406
				2	89288971	Element, Main
				2	36860336	Element, Oil Filter
				2	89288989	Element, Safety
				1	22958201	Element, Separator
				1	22730014	Filter, Assy. w/ Seal Fuel Water Cat Tier
HP915WCU-FX-T3	E16	44008183	50 hrs			
				1	22637904	Filter, Fuel (Primary)
				1	22765325	Filter, Fuel (Secondary)
				2	36860336	Filter, Oil (Airend)
				1	22177737	Filter, Oil (Engine)
		44008506	500 hrs/6 mos.			
				1	22345748	Canister Coolant Conditioner (Engine)
				2	89288971	Filter, Air (Primary)

Model	Serial Code	Kit Part #	Maintenance Interval	QTY	Consumable Part #	Description
				1	22637904	Filter, Fuel (Primary)
				1	22765325	Filter, Fuel (Secondary)
				2	36860336	Filter, Oil (Airend)
				1	22177737	Filter, Oil (Engine)
		44008514	1000 hrs/12mos.			
				1	22345748	Canister Coolant Conditioner (Engine)
				2	89288971	Filter, Air (Primary)
				2	89288989	Filter, Air (Safety)
				1	22637904	Filter, Fuel (Primary)
				1	22765325	Filter, Fuel (Secondary)
				2	36860336	Filter, Oil (Airend)
				1	22177737	Filter, Oil (Engine)
		44008522	2000 hrs/12 mos.			
				1	22345748	Canister Coolant Conditioner (Engine)
				1	22958144	Element, Sep.
				2	89288971	Filter, Air (Primary)
				2	89288989	Filter, Air (Safety)
				1	22637904	Filter, Fuel (Primary)
				1	22765325	Filter, Fuel (Secondary)
				2	36860336	Filter, Oil (Airend)
				1	22177737	Filter, Oil (Engine)
MHP825WCU-FX-T3	E17	44008506	500 hrs/6 mos.			
				1	22476683	Decal, Oil and Filter Change
				2	89288971	Element, Main
				2	36860336	Element, Oil Filter
				1	22765325	Filter, Fuel
				1	22637904	Filter, Fuel w/ Water Sep
				1	22177737	Filter, Oil
				1	22345748	Filter, Water
		44008514	1000 hrs/12mos.			

Model	Serial Code	Kit Part #	Maintenance Interval	QTY	Consumable Part #	Description
				1	22476683	Decal, Oil and Filter Change
				2	89288971	Element, Main
				2	36860336	Element, Oil Filter
				2	89288989	Element, Safety
				1	22765325	Filter, Fuel
				1	22637904	Filter, Fuel w/ Water Sep
				1	22177737	Filter, Oil
				1	22345748	Filter, Water
XP1000WCU-FX-T3	E18	44008183	50 hrs			
				1	22637904	Filter, Fuel (Primary)
				1	22765325	Filter, Fuel (Secondary)
				2	36860336	Filter, Oil (Airend)
				1	22177737	Filter, Oil (Engine)
		44008506	500 hrs/6 mos.			
				1	22345748	Canister Coolant Conditioner (Engine)
				2	89288971	Filter, Air (Primary)
				1	22637904	Filter, Fuel (Primary)
				1	22765325	Filter, Fuel (Secondary)
				2	36860336	Filter, Oil (Airend)
				1	22177737	Filter, Oil (Engine)
		44008514	1000 hrs/12mos.			
				1	22345748	Canister Coolant Conditioner (Engine)
				2	89288971	Filter, Air (Primary)
				2	89288989	Filter, Air (Safety)
				1	22637904	Filter, Fuel (Primary)
				1	22765325	Filter, Fuel (Secondary)
				2	36860336	Filter, Oil (Airend)
				1	22177737	Filter, Oil (Engine)
		44008522	2000 hrs/12 mos.			
				1	22345748	Canister Coolant Conditioner (Engine)

Model	Serial Code	Kit Part #	Maintenance Interval	QTY	Consumable Part #	Description
				1	22958144	Element, Sep.
				2	89288971	Filter, Air (Primary)
				2	89288989	Filter, Air (Safety)
				1	22637904	Filter, Fuel (Primary)
				1	22765325	Filter, Fuel (Secondary)
				2	36860336	Filter, Oil (Airend)
				1	22177737	Filter, Oil (Engine)
XHP975WCAT-T4I	E45	46572083	500 hrs/6 mos.			
				2	36860336	Element, Oil Filter
				1	36867786	Element, Primary
				1	36864361	Element, Primary Outer
				1	36876019	Element, Safety
				1	36864379	Element, Safety Inner
				1	46594960	Filter Element, Fuel Tank Vent 5 Micron
				1	46578323	Filter, Engine Oil
				1	46578321	Filter, Primary Fuel
				2	22090526	Sec. Fuel Ele
		46572084	1000 hrs/12mos.			
				2	36860336	Element, Oil Filter
				1	36867786	Element, Primary
				1	36864361	Element, Primary Outer
				1	36876019	Element, Safety
				1	36864379	Element, Safety Inner
				1	46594960	Filter Element, Fuel Tank Vent 5 Micron
				1	46578323	Filter, Engine Oil
				1	46578321	Filter, Primary Fuel
				2	22090526	Sec. Fuel Ele
		46572085	2000 hrs/12 mos.			
				2	36860336	Element, Oil Filter
				1	36867786	Element, Primary
				1	36864361	Element, Primary Outer
				1	36876019	Element, Safety

Model	Serial Code	Kit Part #	Maintenance Interval	QTY	Consumable Part #	Description
				1	36864379	Element, Safety Inner
				1	23283559	Element, Separator Xhp975
				1	46594960	Filter Element, Fuel Tank Vent 5 Micron
				1	46578324	Filter, Coolant Conditioner
				1	46613690	Filter, Crankcase Breather Cat C13 T4I
				1	46578323	Filter, Engine Oil
				1	46578321	Filter, Primary Fuel
				2	22090526	Sec. Fuel Ele
XP825WCU-T4I	E47	46586959	500-1000 hrs/6 mos.			
				1	22476683	Decal, Oil and Filter Change
				1	36897346	Element, Oil Filter
				2	36867786	Element, Primary
				2	36876019	Element, Safety
				1	46558720	Filter, Engine Lube Oil
				1	46554959	Filter, Fuel Prefilter w/ Water Separator
				1	46558719	Filter, Fuel Primary
		46586960	2000 hrs/12 mos.			
				1	22476683	Decal, Oil and Filter Change
				1	36897346	Element, Oil Filter
				2	36867786	Element, Primary
				2	36876019	Element, Safety
				1	22291280	Element, Sep
				1	46567299	Filter Element, Crankcase Breather
				1	46558720	Filter, Engine Lube Oil
				1	46554959	Filter, Fuel Prefilter w/ Water Separator
				1	46558719	Filter, Fuel Primary
HP750WCU-T4I	E48	46586959	500-1000 hrs/6 mos.			

Model	Serial Code	Kit Part #	Maintenance Interval	QTY	Consumable Part #	Description
				1	22476683	Decal, Oil and Filter Change
				1	36897346	Element, Oil Filter
				2	36867786	Element, Primary
				2	36876019	Element, Safety
				1	46558720	Filter, Engine Lube Oil
				1	46554959	Filter, Fuel Prefilter w/ Water Separator
				1	46558719	Filter, Fuel Primary
		46586960	2000 hrs/12 mos.			
				1	22476683	Decal, Oil and Filter Change
				1	36897346	Element, Oil Filter
				2	36867786	Element, Primary
				2	36876019	Element, Safety
				1	22291280	Element, Sep
				1	46567299	Filter Element, Crankcase Breather
				1	46558720	Filter, Engine Lube Oil
				1	46554959	Filter, Fuel Prefilter w/ Water Separator
				1	46558719	Filter, Fuel Primary
XP825WCU-T4F	F31	46652922	500/1000 hr			
				2	36867786	Element, Primary
				2	36876019	Element, Safety
				1	36897346	Element, Oil Filter
				1	46587383	Filter, Fuel
				1	46558720	Filter, Engine Lube Oil
				1	46652911	Filter, Fuel Prefilter w/Water Separator
				1	22476683	Decal, Oil and Filter Change
		46652923	2000 hrs/12 mos.			
				2	36867786	Element, Primary
				2	36876019	Element, Safety
				1	36897346	Element, Oil Filter
				1	46587383	Filter, Fuel
				1	46558720	Filter, Oil Engine

Model	Serial Code	Kit Part #	Maintenance Interval	QTY	Consumable Part #	Description
				1	46652911	Filter, Fuel Prefilter w/Water Separator
				1	22476683	Decal, Oil and Filter Change
				1	46567299	Crankcase Breather
				1	22291280	Element, Sep
				1	46652904	Filter, DEF Pump
HP750WCU-T4F	F32	46652922	500/1000 hr			
				2	36867786	Element, Primary
				2	36876019	Element, Safety
				1	36897346	Element, Oil Filter
				1	46587383	Filter, Fuel
				1	46558720	Filter, Oil Engine
				1	46652911	Filter, Fuel Prefilter w/Water Separator
				1	22476683	Decal, Oil and Filter Change
		46652923	2000 hrs/12 mos.			
				2	36867786	Element, Primary
				2	36876019	Element, Safety
				1	36897346	Element, Oil Filter
				1	46587383	Filter, Fuel
				1	46558720	Filter, Oil Engine
				1	46652911	Filter, Fuel Prefilter w/Water Separator
				1	22476683	Decal, Oil and Filter Change
				1	46567299	Crankcase Breather
				1	22291280	Element, Sep
VP900eWBAL-VS	F30	46652663	500/1000 hrs			
				1	36867786	Element, Primary
				1	36876019	Element, Safety
				1	54717145	Element, Primary VSD
				1	54717152	Element, Safety VSD
				1	36897346	Element, Oil Filter
		46652664	2000 hrs/12 mos.			
				1	36867786	Element, Primary
				1	36876019	Element, Safety
				1	54717145	Element, Primary VSD

Model	Serial Code	Kit Part #	Maintenance Interval	QTY	Consumable Part #	Description
				1	54717152	Element, Safety VSD
				1	22291280	Element, Sep
				1	36897346	Element, Oil Filter
XXHP1270FCAT-T3	D58	23352446	250 hrs			
				1	35362243	Element, Fuel
				2	35362235	Element, Lube 3406
				1	22730014	Filter, Assy w/ Seal Fuel Water Cat Tier
		23352479	500 hrs/6 mos.			
				1	22476683	Decal, Oil and Filter Change
				1	35362243	Element, Fuel
				1	35362235	Element, Lube 3406
				2	36860336	Element, Oil Filter
				2	36864361	Element, Primary Outer
				2	36864379	Element, Safety Inner
				1	22730014	Filter, Assy w/ Seal Fuel Water Cat Tier
				1	46491197	Orifice Disk, .060"
				1	46491189	Screen, Valve 100 Mesh
		23352495	1000 hrs/12mos.			
				1	22476683	Decal, Oil and Filter Change
				1	35362243	Element, Fuel
				1	35362235	Element, Lube 3406
				2	36860336	Element, Oil Filter
				2	36864361	Element, Primary Outer
				2	36864379	Element, Safety Inner
				1	22730014	Filter, Assy w/ Seal Fuel Water Cat Tier
				1	46491197	Orifice Disk, .060"
				1	46491189	Screen, Valve 100 Mesh

Model	Serial Code	Kit Part #	Maintenance Interval	QTY	Consumable Part #	Description
		23352529	2000 hrs/12 mos.			
				1	22476683	Decal, Oil and Filter Change
				1	35362243	Element, Fuel
				1	35362235	Element, Lube 3406
				2	36860336	Element, Oil Filter
				2	36864361	Element, Primary Outer
				2	36864379	Element, Safety Inner
				1	46553428	Element, Separator
				1	35362268	Element, Water
				1	22730014	Filter, Assy w/ Seal Fuel Water Cat Tier
				1	46491197	Orifice Disk, .060"
				1	46491189	Screen, Valve 100 Mesh
HP1600WCU-FX-T3	E09					
		36088771	500 hrs/6 mos.			
				1	22476683	Decal, Oil and Filter Change
				2	36897346	Element, Oil Filter
				2	36864361	Element, Primary Outer
				2	36864379	Element, Safety Inner
				1	54662036	Filter, Engine Fuel
				1	54662028	Filter, Engine Oil
		36088805	500 hrs/6 mos.			
				1	22476683	Decal, Oil and Filter Change
				2	36897346	Element, Oil Filter
				2	36864361	Element, Primary Outer
				2	36864379	Element, Safety Inner
				1	54662036	Filter, Engine Fuel
				1	54662028	Filter, Engine Oil
		36089324	1000 hrs/12mos.			

Model	Serial Code	Kit Part #	Maintenance Interval	QTY	Consumable Part #	Description
				1	22476683	Decal, Oil and Filter Change
				2	36897346	Element, Oil Filter
				2	36864361	Element, Primary Outer
				2	36864379	Element, Safety Inner
				2	54662036	Filter, Engine Fuel
				1	54662028	Filter, Engine Oil
		44008910	2000 hrs/12 mos.			
				1	22476683	Decal, Oil and Filter Change
				2	36897346	Element, Oil Filter
				2	36864361	Element, Primary Outer
				2	36864379	Element, Safety Inner
				1	22402317	Element, Separator
				1	54662051	Filter, Engine Coolant QSx15
				1	54662036	Filter, Engine Fuel
				1	54662028	Filter, Engine Oil
HP1600WCU-T3	E10					
		36088771	500 hrs/6 mos.			
				1	22476683	Decal, Oil and Filter Change
				2	36897346	Element, Oil Filter
				2	36864361	Element, Primary Outer
				2	36864379	Element, Safety Inner
				1	54662036	Filter, Engine Fuel
				1	54662028	Filter, Engine Oil
		36088805	500 hrs/6 mos.	1		
				2	22476683	Decal, Oil and Filter Change
				2	36897346	Element, Oil Filter
				2	36864361	Element, Primary Outer
				1	36864379	Element, Safety Inner
				1	54662036	Filter, Engine Fuel
					54662028	Filter, Engine Oil

Model	Serial Code	Kit Part #	Maintenance Interval	QTY	Consumable Part #	Description
		36089324	1000 hrs/12mos.			
				1	22476683	Decal, Oil and Filter Change
				2	36897346	Element, Oil Filter
				2	36864361	Element, Primary Outer
				2	36864379	Element, Safety Inner
				2	54662036	Filter, Engine Fuel
				1	54662028	Filter, Engine Oil
		44008910	2000 hrs/12 mos.			
				1	22476683	Decal, Oil and Filter Change
				2	36897346	Element, Oil Filter
				2	36864361	Element, Primary Outer
				2	36864379	Element, Safety Inner
				1	22402317	Element, Separator
				1	54662051	Filter, Engine Coolant QSx15
				1	54662036	Filter, Engine Fuel
				1	54662028	Filter, Engine Oil
XXHP1270FCAT-FX-T3	E12	23352446	250 hrs			
				1	35362243	Element, Fuel
				2	35362235	Element, Lube 3406
				1	22730014	Filter, Assy w/ Seal Fuel Water Cat Tier
		23352479	500 hrs/6 mos.			
				1	22476683	Decal, Oil and Filter Change
				1	35362243	Element, Fuel
				1	35362235	Element, Lube 3406
				2	36860336	Element, Oil Filter
				2	36864361	Element, Primary Outer
				2	36864379	Element, Safety Inner

Model	Serial Code	Kit Part #	Maintenance Interval	QTY	Consumable Part #	Description
				1	22730014	Filter, Assy w/ Seal Fuel Water Cat Tier
				1	46491197	Orifice Disk, .060"
				1	46491189	Screen, Valve 100 Mesh
		23352495	1000 hrs/12mos.			
				1	22476683	Decal, Oil and Filter Change
				1	35362243	Element, Fuel
				1	35362235	Element, Lube 3406
				2	36860336	Element, Oil Filter
				2	36864361	Element, Primary Outer
				2	36864379	Element, Safety Inner
				1	22730014	Filter, Assy w/ Seal Fuel Water Cat Tier
				1	46491197	Orifice Disk, .060"
				1	46491189	Screen, Valve 100 Mesh
		23352529	2000 hrs/12 mos.			
				1	22476683	Decal, Oil and Filter Change
				1	35362243	Element, Fuel
				1	35362235	Element, Lube 3406
				2	36860336	Element, Oil Filter
				2	36864361	Element, Primary Outer
				2	36864379	Element, Safety Inner
				1	46553428	Element, Separator
				1	35362268	Element, Water
				1	22730014	Filter, Assy w/ Seal Fuel Water Cat Tier
				1	46491197	Orifice Disk, .060"
				1	46491189	Screen, Valve 100 Mesh
XXHP1270FCAT-T3	E13	23352446	250 hrs			
				1	35362243	Element, Fuel

Model	Serial Code	Kit Part #	Maintenance Interval	QTY	Consumable Part #	Description
				2	35362235	Element, Lube 3406
				1	22730014	Filter, Assy w/ Seal Fuel Water Cat Tier
		23352479	500 hrs/6 mos.			
				1	22476683	Decal, Oil and Filter Change
				1	35362243	Element, Fuel
				1	35362235	Element, Lube 3406
				2	36860336	Element, Oil Filter
				2	36864361	Element, Primary Outer
				2	36864379	Element, Safety Inner
				1	22730014	Filter, Assy w/ Seal Fuel Water Cat Tier
				1	46491197	Orifice Disk, .060"
				1	46491189	Screen, Valve 100 Mesh
		23352495	1000 hrs/12mos.			
				1	22476683	Decal, Oil and Filter Change
				1	35362243	Element, Fuel
				1	35362235	Element, Lube 3406
				2	36860336	Element, Oil Filter
				2	36864361	Element, Primary Outer
				2	36864379	Element, Safety Inner
				1	22730014	Filter, Assy w/ Seal Fuel Water Cat Tier
				1	46491197	Orifice Disk, .060"
				1	46491189	Screen, Valve 100 Mesh
		23352529	2000 hrs/12 mos.			
				1	22476683	Decal, Oil and Filter Change
				1	35362243	Element, Fuel
				1	35362235	Element, Lube 3406

Model	Serial Code	Kit Part #	Maintenance Interval	QTY	Consumable Part #	Description
				2	36860336	Element, Oil Filter
				2	36864361	Element, Primary Outer
				2	36864379	Element, Safety Inner
				1	46553428	Element, Separator
				1	35362268	Element, Water
				1	22730014	Filter, Assy w/ Seal Fuel Water Cat Tier
				1	46491197	Orifice Disk, .060"
				1	46491189	Screen, Valve 100 Mesh
HP1600WCU-T4I	E97	46615779	500-1000 hrs/12mos.			
				1	46578120	Element, Fuel Filter 7 Micron
				2	36897346	Element, Oil Filter
				2	36864361	Element, Primary Outer
				2	36864379	Element, Safety Inner
				1	46594960	Filter Element, Fuel Tank Vent 5 Micron
				1	54662051	Filter, Engine Coolant Qsx15
				1	54662028	Filter, Engine Oil
				1	46618460	Filter, Fuel 3 Micron Cu Qsx15 T4I
		46615599	2000 hrs/12 mos.			
				1	46610619	Element, Crankcase Breather Filter Qsx15L
				1	46578120	Element, Fuel Filter 7 Micron
				2	36897346	Element, Oil Filter
				2	36864361	Element, Primary Outer
				2	36864379	Element, Safety Inner
				1	22402317	Element, Separator

Model	Serial Code	Kit Part #	Maintenance Interval	QTY	Consumable Part #	Description
				1	46594960	Filter Element, Fuel Tank Vent 5 Micron
				1	54662051	Filter, Engine Coolant Qsx15
				1	54662028	Filter, Engine Oil
				1	46618460	Filter, Fuel 3 Micron Cu Qsx15 T4I
		22711766	Kit, Maintenance			By-Pass Elements Vented Element
		46615380	Kit, Maintenance			Ether QSX15
P260HP220WYM fx T3	E55	46584780	500 hrs/6 mos.			
				1	16539645	Belt
				1	22226377	Element, Filter Fuel
				1	22926737	Element, Fuel/Wtr 30Micro
				1	23279078	Element, Oil Filter w/ Bypass M27X2 Thread
				1	35393685	Element, Primary
				1	54471834	Element, Primary Air
				1	22226351	Filter, 80X80L
		44034049	1000 hrs/12mos.			
				1	16539645	Belt
				1	22226377	Element, Filter Fuel
				1	22926737	Element, Fuel/Wtr 30Micro
				1	23279078	Element, Oil Filter w/ Bypass M27X2 Thread
				1	35393685	Element, Primary
				1	54471834	Element, Primary Air
				1	46491833	Element, Separator 260Cfm
				1	22226351	Filter, 80X80L
P260HP220WYM ex T3	E56	46584780	500 hrs/6 mos.			
				1	16539645	Belt
				1	22226377	Element, Filter Fuel

Model	Serial Code	Kit Part #	Maintenance Interval	QTY	Consumable Part #	Description
				1	22926737	Element, Fuel/Wtr 30Micro
				1	23279078	Element, Oil Filter w/ Bypass M27X2 Thread
				1	35393685	Element, Primary
				1	54471834	Element, Primary Air
				1	22226351	Filter, 80X80L
		44034049	1000 hrs/12mos.			
				1	16539645	Belt
				1	22226377	Element, Filter Fuel
				1	22926737	Element, Fuel/Wtr 30Micro
				1	23279078	Element, Oil Filter w/ Bypass M27X2 Thread
				1	35393685	Element, Primary
				1	54471834	Element, Primary Air
				1	46491833	Element, Separator 260Cfm
				1	22226351	Filter, 80X80L



Safety Check Valves

- ◇ Designed for maximum performance and service within the correct CFM rating
- ◇ The CFM output is the controlling factor affecting the proper operation of a safety check valve
- ◇ Use only specific valve made to control the CMF range for proper performance
- ◇ No single valve can properly handle all of the variable factors during normal service
- ◇ Each valve is equipped with a spring to precisely control a limited range of compressor air output volume
- ◇ Operating within this range, a safety check valve will react instantly and automatically to hose failure and accidental uncoupling, eliminating dangerous hose whip
- ◇ Its tamper-proof construction is of solid brass with stainless steel springs
- ◇ When ordering a Doosan safety check valve:
 - ◇ Determine the CFM rating of the compressor
 - ◇ Always consider the size of the valve must be the same size as the air hose
 - ◇ Max pressure rating 375PSIG

Machine Size CFM	Size (NPT)	Part #
55-70	3/4"	23202146
75-95	3/4"	35363795
75-95	3/4"	23202153
100-125	3/4"	35364371
130-140	3/4"	23203161
145-155	3/4"	35364389
150-185	1"	35363803
160-185	3/4"	35364397
200-250	1"	35364405
300-325	1"	35364413
365-375	1"	35364421
365-375	1 1/2"	35363829
450-500	1 1/2"	35364439
600-635	1 1/2"	35364447
750-850	1 1/2"	35364454
600-635	2"	35363837
750-850	2"	35364462
900-1050	2"	35364470
1050-1300	2"	35364488
1100-1300	3"	35363845
1350-1500	3"	43207034
1600-1800	3"	35364496
2000-2500	3"	35364504



Ball Valves - Single



Part #	Inlet Size	Outlet Size
35581792	1/2" NPT Female	1/2" NPT Female
35576115	3/4" NPT Female	3/4" NPT Female
35576123	1" NPT Female	1" NPT Female
35590181	1 1/4" NPT Female	1 1/4" NPT Female
35612126	1 1/4" NPT Female	1 1/4" NPT Female (vented)
35602473	2" NPT Female	2" NPT Female
36856045	2" NPT Female	2" NPT Female (2 outlets)
36922987	2" NPT Female	2" NPT Female (2 outlets with lockable feature)
36755718	3" NPT Female	3" NPT Female
36922995	3" NPT Female	3" NPT Female (with lockable feature)

Ball Valves - Double

Part #	Inlet Size	Outlet Size
36881076 1	1/4" NPT Female	1 1/4" NPT Female (2)

Air Line Lubricators with Relief Valve

- ◇ Inexpensive way to keep air tools operating at peak efficiency
- ◇ Reduce costly repairs and downtime
- ◇ Adjustable feed allows adaptability to all climates and conditions

Capacity	Size	Part #	Size	Part #
2-Quart	1 1/4" NPT	35356252		
1-Quart	1 1/4" NPT	35255025		
1-Pint	1" NPT	35364322	1" BSP	35371129
1/2-Pint	3/4" NPT	35364314	3/4" BSP	35371111
1/3-Pint	3/4" NPT	35364306	3/4" BSP	35371103
1-Quart	1" NPT	35371251		
3-Gal.	2 1/2" NPT	36874725		
6-Gal.	2 1/2" NPT	36874733		



	Part #
Service Repair Kits (fits only 35371251)	35371269
Filler Relief Cap with Relief Valve (fits all except 35371251)	35609064
Sight Glass w/o-ring (fits all except 35371251)	35380989
O-Ring (35255025 and 35356252)	35380948
Gasket (35371251)	35380930
Oil control flow valve (fits all)	36138113

Swing Check Valves



Size	Part #	PSI Steam Rating	Material
3/4"	95287637	150 lbs.	Bronze
1"	95286727	150 lbs.	Bronze
1 1/4"	95279667	150 lbs.	Bronze
1 1/2"	95394336	150 lbs.	Bronze
2"	95294344	150 lbs.	Bronze
2 1/2"	95286795	150 lbs.	Bronze
3"	95286779	150 lbs.	Bronze
3"	36850428	300 lbs.	Bronze
3"	43207034	300 lbs.	Ductile Iron

- ◇ Specifically designed valves to prevent back-flow of air and protect your compressor.



MISCELLANEOUS PRODUCTS

Discharge Air Muffler



- ◇ Silence your discharge air and lower your shop noise level
- ◇ Manufactured to meet Doosan's specifications
- ◇ Identical to the muffler we use in our test area
- ◇ Constructed of Heavy Duty Wire and Casting components for longer life

We offer the following sizes:

Part #	Size	Max Pressure (psi)
35370949	1/2"	175
35370956	3/4"	175
35370964	1"	175
35370972	1 1/4"	175
35370980	1 1/2"	175
35370998	2"	175
35371004	3"	175
36922789	2"	250
36922771	3"	425

Synflex Hose & Fittings (used on regulation lines)

Part #	Description	Qty in Kit
35333715	1/4" SYNFLEX Tubing	480"
35356484	3/8" SYNFLEX Tubing	480"
35356567	Tee Run 1/4 NPT X 3/8	4
35356567	Tee Run 1/4 NPT X 3/8	4
35369339	Female 1/4 NPT X 3/8 straight	4
35369347	Male 1/4 NPT X 3/8 straight	4
35369354	Male 1/4 NPT X 3/8 elbow	4
35369362	Male 1/4 NPT X 1/4 elbow	4
35369370	Male 1/8 NPT X 1/4 elbow	4
35369388	Female 1/8 NPT X 1/4 elbow	4
35369396	Male 1/8 NPT X 3/8 tee	4
35369503	Male 1/4 NPT x 3/8 tee	4
35370386	Male 1/8 NPT x 3/8 elbow	4
35373976	Tee 1/4 NPT x 3/8	4
35374701	Tee 1/8 MP x 1/8 x 1/4	4
35374859	Tee 1/8 MP x 3/8 x 3/8	4
35380955	Tubing cutter	1

All of the above fittings and tubing are included in a convenient kit: **36006237**

Model	Serial Code	Bare Coupling	Doosan Coupling Kit	Notes
AIRSOURCE P160BWIR TIER 4I	D12			
AIRSOURCE+JD-T4I	D68	22351720	22344808	
C185 - D80 and D95		46492971		
C185WKUB-T2	D80	46492971	46492955	
C185WKUB-T2	E04	46492963	46492948	
HP1000AWCU- HP1000CWCUCU		36783710	36017739	
HP1300CWCUCU- HP1300EWCUCU		54540141		
HP1300WCAT T4I	E46			
HP1300WCU- HP1300BWCUCU		36783710	36017739	
HP1300WCU-T3	B84	54540141		
HP1300WGM- HP1300BWGM		36783710		
HP1600CWCUCU- HP1600EWCUCU		54540141		
HP1600SCAT- HP1600ASCAT		54540141		
HP1600WCU-FX-T3	E09	54540141		
HP1600WCU-T3	B83	54540141		
HP1600WCU-T3	E10	54540141		
HP1600WCU-T4I	E97	46578019	46589179	
HP300WCU- HP300BWCUCU		35834779	36017671	
HP300WJD		35834779	36017671	
HP365WIR		35834779		
HP375AWD		35834779	36017663	
HP375BWIR	C73	35834779	N/A	
HP375BWIR	C77	35834779	N/A	
HP375BWIR	D02	35834779	N/A	
HP375CWIR	C47	35834779	N/A	
HP375WCU		35834779		
HP375WCU-T2	D46	35834779	N/A	
HP375WIR-HP375BWIR		35834779		
HP375WJD		35834779		
HP375WJD-T3	D54	35834779	N/A	
HP450AWIR	C80	35834787	N/A	
HP450AWIR	C86	35834787	N/A	
HP450WCU-HP450AWCU		35834787	36017689	
HP450WIR-HP450AWIR		35834787		
HP450WIR-T2-FLEX	C83	35834787	N/A	

Model	Serial Code	Bare Coupling	Doosan Coupling Kit	Notes
HP450WJD-T3	C55	35834787	N/A	
HP525CWGM		35834787		
HP525WGM- HP525BWGM		35834779	35068774	
HP600WCU- HP600CWCU		35834787	36017697	
HP600WGM- HP600BWGM		35834787		
HP600WJD		35834787	36017697	
HP675FWCU		35834795		
HP675FWCU EXPORT	C07	35834795		
HP675WCU-T3	B74	35834795		
HP750DWCU- HP750FWCU		35834795		
HP750WCU-FX-T3	E19	35834795		
HP750WCU- HP750CWCU		35834795	36017705	
HP750WCU-T2	C09	35834795		
HP750WCU-T3	B76	35834795		
HP750WCU-T4I	E48	54400031, Drive pins 92041458 needs 4		
HP750WJD		35834795	36017705	
HP825AWCU- HP825DWCU		35834795	36017705	
HP850WGM- HP850BWGM		35834795		
HP900WCAT- HP900AWCAT		35834795	36017705	
HP915AWCU- HP915BWCU		54400031		
HP915WCU		35834795		
HP915WCU-FX-T3	E16	92041441	54400031	
HP915WCU-T3	C60	92041441	54400031	
HP935AWCU- HP935BWCU		54400031		
HP935WCU		35834795	36017705	
MHP825 W CAT	B98	92041441	54400031	
MHP825 W CAT	C04	92041441	54400031	
MHP825WCAT- MHP825CWCAT		54400031		
MHP825WCU-FX-T3	E17	92041441	54400031	
MHP825WCU- MHP825CWCU		54400031		
MHP825WCU-T3	C59	92041441	54400031	
NHP1500WCU		54740691		
P100AWD-P100CWD		36767689	35099290	

Model	Serial Code	Bare Coupling	Doosan Coupling Kit	Notes
P100BWF		36850097	36012227	
P100DWD-P100FWD		36063386		
P100WD		35074004		
P100WF-P100AWF		36773513	36001505	
P100WUF-P175WUF		36883513	36001501	
P100WJD		36063261		
P100WJDU-P175AWJDU		36063261		
P100WW-P100BWW		35843952	35082379	
P100WWU-P100AWWU		35843953	35082380	
P1100WGM-P1100BWGM		36783710		
P110AWIR, 135AWIR		22199855		
P110WIR, P135WIR		54612213		
P125DWD		36851939	36017622	
P1300AWCU-P1300CWCU		36783710	36017739	
P130WJD-P130AWJD		36001527		For units with metal fan
P130WJD-P130AWJD		54755087	36063261	For units with plastic fan
P135WIR-T4I	D10	22253405	22199855	
P1600WCU-P1600BWCU		36783710	36017739	
P1600WGM-P1600BWGM		36783710		
P160BWIR (AirSource)		22509681	36096485	
P160WJD-P160DWJD		36063261		
P175BWJD-DWJD		36063261		
P175WD-P175DWD		36063386		
P175WJU-P175AWJU		36063386		
P175WW-P175BWW		35843952	35082379	
P175WWU-P175AWWU		35843952	35082379	
P185AWIR		22344808	36096493	
P185BWIR (AirSource Plus JD)		22509681	36096485	
P185FWJD (AirSource Plus JD)		22344808	36096477	
P185FWJD ABT AIRSOURCE	D09	22344808	N/A	
P185GWJD		22344808	36096477	
P185GWJD Re-Rate	B73	22351720	22344808	
P185WD-P185AWD		36063261		
P185WIR, XP185WIR		36063386		
P185WIR-FLEX	D07	22344808	N/A	
P185WJD-CP	D08	22344808	N/A	
P185WJD-D75		46492963		
P185WJD-P185EWJD		36063261		
P185WJDR-T4I	D11	22344808	N/A	
P185WJD-T4I	D75	46492963	N/A	

Model	Serial Code	Bare Coupling	Doosan Coupling Kit	Notes
P185WJDU-P185AWJDU		36063261		
P185WJDU-T4I	D99	46492963	46492948	
P185WYM - D76		46492971		
P185WYM-T4I	D76	46492963	N/A	
P250CWJD		36063287		
P250WCU-P250AWCU		36063279		
P250WD-P250BWD		36063493		
P250WIR, P260WIR		36063378		Prior to serial # 326650
P250WIR, P260WIR		54755087		Serial # 326650 and later
P250WJD-P250BWJD		36063279	36017648	
P250WJD-T3	D81	22314348	46577699	
P250WJDU		54755087		
P250WYM - D81		46491445		
P260/HP220 - D82		46491445		
P260/HP220WYM-T3	D82	46491445	46577699	
P260AWIR		22314348		
P260WIR-T3	D13	22314348	N/A	
P300WGM		35834779	35068774	
P335WD		35834779	35068774	
P375WCU-P375BWCU		35834779	36017671	
P375WD-P375AWD		35834779	36017663	
P375WJD		35834779	36017671	
P425AWD		35834779	36017663	
P425BWIR	C72	35834779	N/A	
P425BWIR	C76	35834779	N/A	
P425BWIR	D01	35834779	N/A	
P425WCU		35834779		
P425WCU-T2	D45	35834779	N/A	
P425WGM		35834779	35068774	
P425WIR-P425BWIR		35834779		
P425WJD-T3	C46	35834779	N/A	
P450SCA		35834779	35068774	
P600AWIR	C79	35834787	N/A	
P600AWIR	C85	35834787	N/A	
P600WCU-P600AWCU		35834787	36017689	
P600WIR		35834787		
P600WIR-FLEX	C82	35834787	N/A	
P600WJD-T3	C54	35834787		
P700CWGM		35834787		
P700WGM-P700BWGM		35834779	35068774	
P750WCU-P750AWCU		35834787	36017697	
P850WGM-P850BWGM		35834787		
P900WCU-P900BWCU		35834795	36017705	
P90WIRU-T4I	D50	92790633	N22181218	
RHP1070WCAT		36783710		

Model	Serial Code	Bare Coupling	Doosan Coupling Kit	Notes
SHP750A W CAT	B95	92041441	22362933	
SHP750WCAT		22362933		
SHP750WCU		22362933		
SHP750WCU	B80	92041441	22362933	
SHP825 W CAT	C02	92041441	22362933	
SHP825WCAT-SHP825AWCAT		22362933		
SHP825WCAT-SHP825AWCAT		22362933		
SPER STD XP1000 B W CU	B72	92041441	54400031	
SUPER STD HP915 B W CU	B71	92041441	54400031	
SUPER STD MHP825 C W CU	B70	92041441	54400031	
SUPER STD VHP750 D W CU	B69	92041441	54400031	
VHP300BWIR	C74	35834779	N/A	
VHP300BWIR	C78	35834779	N/A	
VHP300BWIR	D03	35834779	N/A	
VHP300WD-VHP300AWD		35834779	36017663	
VHP300WIR-VHP300BWIR		35834779		
VHP400AWIR	C81	35834787	N/A	
VHP400AWIR	C87	35834787	N/A	
VHP400WCU-VHP400AWCU		35834779	36017689	
VHP400WIR-T2-FLEX	C84	35834787	N/A	
VHP400WIR-VHP400AWIR		35834787		
VHP400WJD-T3	C56	35834787	N/A	
VHP750 W CAT	C03	92041441	54400031	
VHP750AWCU-VHP750DWCU		54400031		
VHP750BWCAT-VHP750EWCAT		54400031		
VHP750WCAT-T3	B97	92041441	54400031	
VHP750WCAT-VHP750AWCAT		35834795		
VHP750WCU		35834795		
VHP825WCU		35834795	36017705	
VHP850WCAT-VHP850AWCAT		35834795	36017705	
XHP1070AWCAT, XHP1070CWCAT				
XHP1070B-S CAT (TIER 3)	B43	54540141		

Model	Serial Code	Bare Coupling	Doosan Coupling Kit	Notes
XHP1070BSCAT		54540141		
XHP1070DWCAT		54540141		
XHP1070FrameCAT		54540141		
XHP1070SCAT- XHP1017ASCAT		36783710		
XHP1070WCAT, XHP1070BWCAT		36783710	36017739	
XHP1070WCAT-ML-T3	D86	54540141		
XHP1070WCAT-T3	B41	54540141		
XHP1170 FCAT-S T3-EX	E42	54540141		
XHP1170AWCU	B44	54540141		
XHP1170CM-1800	D85			
XHP1170-F-CAT TIER 3 C18 ENGINE	D65	54540141		
XHP1170FCATS-FX-T3	E11	54540141		
XHP1170FCATS-FX-T3	E92	54540141		
XHP1170FCATS-T3	C97	54540141		
XHP1170FrameCAT		54540141		
XHP1170SCAT-T3	B42	54540141		
XHP1170SCAT- XHP1170BSCAT		54540141		
XHP1170WCAT-FX-T3	E21	54540141		
XHP1170WCAT-T3	B40	54540141		
XHP1170WCAT-T3	E37	54540141		
XHP1170WCAT- XHP1170BWCAT		54540141		
XHP1170WCU- XHP1170AWCU		54540141		
XHP1400WGM- XP1400BWGM		36783710		
XHP600SCAT		36730380	36017713	
XHP650WCAT- XHP650BWCAT		36730380	36017713	
XHP700A W CAT	B96	92041441	22362933	
XHP700AWCU	B79	92041441	22362933	
XHP700WCAT		22362933		
XHP700WCU- XHP700AWCU		22362933		
XHP750-AE-KIT	E40			
XHP750C W CAT	C01	92041441	22362933	
XHP750CWCAT- XHP750DWCAT		22362933		
XHP750SCAT		36730380	36017713	
XHP750SGM		35834795		
XHP750WCAT-FX-T3	E14	92041441	22362933	
XHP750WCAT-ML-T3	D93	92041441	22362933	

Model	Serial Code	Bare Coupling	Doosan Coupling Kit	Notes
XHP750WCAT-T3	C44	92041441	54400031	
XHP750WCAT-XHP750BWCAT		36730380	36017713	
XHP750WCU-XHP750AWCU		22362933		
XHP750WGM-XHP750BWGM		35834795		
XHP825WCAT-XHP825BWCAT		36730380	36017713	
XHP900-AE-KIT	E41			
XHP900SCAT-XHP900ASCAT		36730380	36017721	
XHP900WCAT-XHP900BWCAT		36830380	36017721	
XHP975WCAT-T4I	E45	46554945	46554923	
XP1000AWCU-XP1000BWCU		54400031		
XP1000WCAT-XP1000AWCAT		35834795	36017705	
XP1000WCU		35834795		
XP1000WCU-FX-T3	E18	92041441	54400031	
XP1000WCU-T3	C61	92041441	54400031	
XP1050WCU		35834795	36017705	
XP1060WCU-XP1060AWCU		54400031		
XP1200AWCU-XP1200CWCU		36783710	36017739	
XP1400WCU-XP1400BWCU		36783710	36017739	
XP185AWIR		22314348		
XP185WIR-T3	D14	223143348	N/A	
XP375BWIR	C71	35834779	N/A	
XP375BWIR	C75	35834779	N/A	
XP375BWIR	C99	35834779	N/A	
XP375WCU-T2	D44	35834779	N/A	
XP375WJD-T3	C48	35834779	N/A	
XP400AWD		35834779	36017663	
XP525WCU-XP525AWCU		35834787	36017689	
XP600CWGM		35834787		
XP600WCU-XP600AWCU		35834787	36017697	
XP600WGM-XP600BWGM		35834779	35068774	
XP750BWCU-XP750CWCU		35834787	36017697	
XP750DWCU-XP750FWCU		35834795		
XP750WCU-ML-T3	E33	35834795		

Model	Serial Code	Bare Coupling	Doosan Coupling Kit	Notes
XP750WCU-T2	C08	35834795		
XP750WCU-T3	B75	35834795		
XP750WGM- XP750BWGM		35834787		
XP750WJD		35834787	36017697	
XP825WCU-FX-T3	E20	35834795		
XP825WCU-T2	C10	35834795		
XP825WCU-T3	B77	35834795		
XP825WCU-T4I	E47	54400031	Drive pins 92041458 needs 4	
XP825WCU-XP825FWCU		35834795	36017705	
XP900AWCU- XP900DWCU		35834795	36017705	
XP900WGM- XP900BWGM		35834795		
XP950 W CAT	C05	92041441	54400031	
XXHP1270FCAT-FX-T3	E12	23119100		
XXHP1270FCAT-T3	D58	23119100		
XXHP1270FCAT-T3	E13	23119100		

HOSE REELS

Hose Reel Kits include:



- ◇ OSHA safety valves
- ◇ All fittings
- ◇ Manual cutoff valve
- ◇ Grease fittings

Determine what type of drawbar the unit has before using this chart.

Drawbar Type	Hose Reel Kit	Hose Reel Type	Applicability
"T" Type	36027118	Single	P100 thru P125
"T" Type	35095959	Single	P130 thru P185
"T" Type	36027126	Double	P100 thru P125
"T" Type	35095967	Double	P130 thru P185
"T" Type	35095991	Single	P250WD
"T" Type	35096007	Single	P250WD
Fixed "A" Frame	36027134	Single	P100WF; P125WF
Fixed "A" Frame	36027142	Double	P100WF; P125WF
Fixed "A" Frame	35097187	Single	P130WJD; P130AWJD
Fixed "A" Frame	35097195	Double	P130WJD; P130AWJD
Fixed "A" Frame	35097203	Single	P130/160BWJD; P130/160CWJD;
			P175A, B, C, DWD; P185WD;
			P185A, B, C, DWJD;
			P250A, BWD; P250AWJD
Fixed "A" Frame	35097211	Double	
Fixed "A" Frame	35097260	Single	VHP300 thru P425WD;
			HP300WCU; P375WCU
Fixed "A" Frame	35097278	Double	P250BWJD; HP300/375WJD;
			XP375WIR; P425WIR; P250, AWCU;
			HP300/375AWCU; HP365WIR;
			HP300/375BWCU; VHP300WIR;
			HP375WJD; VHP300A,BWIR;
			HP375A, BWIR;
			XP375A, BWIR; P425A, BWIR
Fold-up "A" Frame	36042976	Single	P100FWD; P100WJD;
			P110WIR; P110AWIR
Fold-up "A" Frame	36042984	Double	

Drawbar Type	Hose Reel Kit	Hose Reel Type	Applicability
Fold-up "A" Frame	36043024	Single	P125FWD; P130WD;
			P130DWJD; P135WIR; P135AWIR
Fold-up "A" Frame	36043040	Double	
Fold-up "A" Frame	36043032	Single	P160DWJD; P175DWJD;
			P185AWD; P185EWJD; P185WIR;
			P185AWIR; P250CWJD; P250WIR;
			P260WIR; P260AWIR; P185GWJD
Fold-up "A" Frame	36043057	Double	
Fold-up "A" Frame	36099489	Single	AirSource and AirSource Plus (internal to enclosure)

LEGACY DEALER-INSTALLED OPTIONS

Note: Each listing contains the dealer installed options that apply *only* to the machines listed in bold at the beginning of each table.

Platinum w/JD4024T

	P185GWJD	P185GWJDR
Serial Codes	B34	B73
Fuel Level Gage W/Shut Down	44004356	
R Fuel/Water Separator	44004364	
Tach	44004372	
Engine Block Heater	44004380	
4in1 Gage	44004398	
Gauge Illumination	44004406	
Diagnostic Panel W/Fuel Shutdown	44004414	
Diagnostic Panel W/Fuel Shutdown & Air Filter Change Light	44004422	
Spark Arrestor	44004430	

250cfm Utility Mount

	P250WJDU	P250WJDU w/aux drive
Serial Codes	A23	A39
Electric Star / Run Kit	44007722	

Platinum Models (with metal end panel)

	P130DWJD		P260WIR		
	P125BWJD		P250WIR		
	P100WJD	P250CWJD	P100FWD		
	P160DWJD	P185WIR	P125FWD		P110WIR

	P175DWJD	P185EWJD	P130WD	P185AWD	P135WIR
Fuel Level Gauge/Shut Down	36042752	36042752 3	6042752	36042752	36042752
*Tachometer	36042778	†36042778	36042778	36042778	
*4 in 1 Gauge (Eng. Oil Pressure, Voltmeter, Eng. Water Temp., Disch. Temp.)	36042786	see below	36042802	36042802	54517065
*Diagnostic Panel 36042810	36042810	36042810	36042810	36042810	
Gauge Illumination	36033934	36033934	36033934	36033934	36033934
Keyed Ignition	36042828	36042828	36042828	36042828	36042828
Eng. Block Heater	36010221	†36007375			
Manual Cold Start (Ether)	36036051	†36036051			
Auto Cold Start (Ether)	36042844	†36042844	36042836	36042836	
Fuel/Water Sep. Filter	36042851	•36042851	36042851	36042851	
Spark Arrestor	36006849	36006849	36006914	36006914	36006849
License Plate Light for 2 Light System	36042869	36042869	36042869	36042869	36042869
Water/Air Sep. Filter (1 1/4" NPT; 250psi Max; 175°F)	35353713	35353713	35353713	35353713	35353713

* Option Harness 36042877 is required for these kits.

† Available on John Deere units only

• Comes as standard equipment on I-R engine powered units

4 in 1 Gauge Option: P185EWJD - 36042794

4 in 1 Gauge Option: P185WIR - 54517065

4 in 1 Gauge Option: P250CWJD - 54517057

4 in 1 Gauge Option: P250WIR - 54517065

Platinum Models (with plastic end panel)

	P100WJD				
	P125BWJD				
	P130DWJD				
	P160DWJD				
	P175DWJD	P110WIR			
	P185EWJD	P135WIR	P185WIR	P260WIR	P250CWJD
Fuel Level Gauge/Shut down	36067957	36067957	36067957	36067957	36067957
*Tachometer	36067965	36067981	36067973	36067973	36067965
*4 in 1 Gauge	36067932	36067940	36067940	36068013	36068021
*Diagnostic Panel	36068005	36068005	36068005	36068005	36068005
(With Fuel Level Gauge)					
*Diagnostic Panel (With Fuel Level Gauge and Filter Indicator Light)	36067999	36067999	36067999	36067999	36067999
Gauge Illumination	36067882	36067882	36067882	36067882	36067882
†Eng. Block Heater	see below	36067890	36067890	36067980	36007375
Manual Cold Start (Ether)	36036051				36036051
Auto Cold Start (Ether)	36042844				36042844
Fuel/Water Sep. Filter	36042851				36042851
Spark Arrestor	36006849	36006849	36006849	36006849	36006849
Electromechanical Hour Meter	36067924	36067924	36067924	36067924	36067924
Option Harness	36067908	36067916	36067916	36067916	36067908

† 36010221 for P100WJD thru P175DWJD; 36002715 for P185EWJD.

* Option Harness must be installed for these kits.

Family 1 Models

	P250		P300		P375	
Serial Code	359	349, 358	411, 025	026	412, 413	414
Fuel Level Gauge	36042760	36042760	36042760	36042760	36042760 3	6042760
*4 in 1 Gauge (Eng. Oil Pressure, Voltmeter, Eng. Water Temp., Disch. Temp.)	36042794	36042786	36042786	36042794	36042786	36042794
*Tachometer	36042778	36042778	36042778	36042778	36042778	36042778
*Diagnostic Panel	36042810	36042810	36042810	36042810	36042810	36042810
Gauge Illumination	36033934	36033934	36033934	36033934	36033934	36033934
Key Ignition	36042828	36042828	36042828	36042828	36042828	36042828
Eng. Block Heater	36007375	36033157	36033157	36007375	36033157	36007375
Eng. Block Heater with Battery Heater	36034064	36014983	36014983	36034064	36014983	36034064
Spark Arrestor	36033033	36033033	36033124	36033124	36033124	36033124
Fuel/Water Sep. Filter	36033538	36033538	36033538	36033538	36033538	36033538
License Plate Light for 2 light system	36034411	36034411	36034411	36034411	36034411	36034411
Aftercooler with Water Separator	36034338	36034338	36034346	36034346	36034346	36034346
Aftercooler with Water Separator and Reheater	36034353	36034353	36034361	36034361	36034361	36034361
†Aftercooler Single Stage Filter	36034304	36034304	36034304	36034304	36034304	36034304
†Aftercooler Dual Stage Filter	36034312	36034312	36034312	36034312	36034312	36034312
†Aftercooler Triple Stage Filter	36034320	36034320	36034320 3	6034320	36034320	36034320
Water/Air Sep. Filter (11/4" NPT; 250psi Max; 175°F)	35353713	35353713	35353713	35353713	35353713	35353713

* Option Harness 36042885 is required for these kits.

† Units must be equipped with aftercooler.

Family 2 Models

	P290	P350	P375		P425
Serial Codes	063	062	064	061	060
*4 in 1 Gauge	36068088	36068088	36068088	36068096	36068088
*Tachometer	36068104	36068104	36068104	36068112	36068104
Electromechanical Hour Meter	36067924	36067924	36067924	36067924	36067924
Option Harness	36068070	36068070	36068070	36068062	36068070
Spark Arrestor	36068047	36068047	36068047	36068047	36068047
Engine Block Heater	36068039	36068039	36068039	36007375	36068039
Cold Start				36068054	
Fuel/Water Sep. Filter				36042851	

* Option harness is required for these kits.



Field Kits	
Serial Codes 047, 060, 061, 062, 063, 064, 757, 758	
ESA Wheel Chks	36065761
MSA Highway Light	36065779
Securable LTBL	36065787
MSA Spark Arrest	36065795
Dual Press Switch	36065803
IQ Piping IR	36070357
IQ Piping JD	36070365

Miscellaneous Options for Various Models

	P375		P400	P450	P525
Serial Code	408	410	422	443	442
Cold Start (Ether)	35056118	36016962	36016962	36016962	36016962
Fuel Gauge (Panel)	35093186				
A/C Eng. Oil Pan Heater	35337062				
Tool Tray	35074731				
Voltmeter		(A)36769230	(B)36841153	(B)36841153	(B)36841153
Engine Temp.		(A)36007466	(B)36007466	(B)36007466	(B)36007466
Engine Oil Pressure		(A)36020600	(B)36020600	(B)36020600	(B)36020600
Tachometer		(A)36007524	(B)36007524	(B)36007524	(B)36007524
Discharge Temp.		(A)36020592	(B)36020659	(B)36020659	(B)36020659
*Aftercooler with Water Separator		36017788	36017762	36017762	36017762
Aftercooler Stage 1 Filter		36016814	36016814	36016814	36016814
A/C Powered Cold Start		36014983	36014991	†36025856	
A/C Powered Cold Start w/Synthetic ATF					
Water/Air Sep. Filter (1 1/4" NPT; 250psi Max; 175°F)					
Auto Start Kit					



	P600-P825		P825-P1050	
Serial Code	522	720	721-746	707-709
Cold Start (Ether)	36016962			
Voltmeter	(B)36841153			
Engine Temp.	(B)36007466			
Engine Oil Pressure	(B)36020600			
Tachometer	(B)36007524			
Discharge Temp.	(B)36020659			
*Aftercooler with Water Separator	36017762			
Aftercooler Stage 1 Filter	36016814			
A/C Powered Cold Start	36016814	†36025856		
Water/Air Sep. Filter (11/4" NPT; 250psi Max; 175°F)	35353713			
Auto Start Kit			36050058	36050672



	P1000-P1600
Serial Code	673-692
A/C Powered Cold Start	36034213
A/C Powered Cold Start w/Synthetic ATF	36034221
Water/Air Sep. Filter (11/4" NPT; 250psi Max; 175°F)	
Auto Start Kit	36050813

Special 8 gauge harness kit (A)36020626 or (B)36020618 is required for the above gauge kits where noted.

* Kits Come with extended drawbar

† For John Deere Units use 36025864.



Small Compressors

Model	Serial Code	Part Description	Part Number
Small Compressors T1-T3			
VHP30RMH Open Center		10 Gallon Receiver Tank Kit	36087344
		22.5 Gallon Receiver Tank Kit	36087351
		All Seasons Select Warranty Service Kit	36087369
		Kit, Pressure Switch Upgrade 175/145 PSI	44037372
		Kit, Pressure Switch Upgrade 150/120 PSI	44037380
VHP40RMH Open Center		10 Gallon Receiver Tank Kit	36087344
		22.5 Gallon Receiver Tank Kit	36087351
		All Seasons Select Warranty Service Kit	36087369
		Kit, Pressure Switch Upgrade 175/145 PSI	44037372
		Kit, Pressure Switch Upgrade 150/120 PSI	44037380
VHP40RMH Closed Center		10 Gallon Receiver Tank Kit	36087344
		22.5 Gallon Receiver Tank Kit	36087351
		All Seasons Select Warranty Service Kit	36087369
		Kit, Pressure Switch Upgrade 175/145 PSI	44037372
		Kit, Pressure Switch Upgrade 150/120 PSI	44037380
HP60CMH		Service Kit	44028108
MHP85CMH Open Center		Hydraulic Cooler Assembly (12VDC)	44035459
		Pro-Tec Warranty Service Kit	44035467
MHP85CMH Closed Center	E03	Hydraulic Cooler Assembly (12VDC)	44035459
		Pro-Tec Warranty Service Kit	44035467
C185WKUB-T2 Export Only		Add-on, external, lockable tool storage	36099679
		Bumper	36099778
		Engine Block Heater IR	44001337
P185WJD	D75	Fuel/Water Separator	44004364
		Engine Block Heater	44008340
		Spark Arrestor	44004430
P185WYM	D76	Fuel/Water Separator	44004364
		Engine Block Heater	44008340
Small Compressors T4			

Model	Serial Code	Part Description	Part Number
P125WJDU-T4i		Engine Block Heater	44008340
		Spark Arrestor	44004430
		Fuel Gage w/ Low Fuel Shutdown	44038925
		Remote Control Panel	44038933
P125WJDU-FX-T4i		Engine Block Heater	44008340
		Spark Arrestor	44004430
		Fuel Gage w/ Low Fuel Shutdown	44038925
		Remote Control Panel	44038933
C185WKUB-T4i	D95	Add-on, external, lockable tool storage	36099679
		Bumper	36099778
		Engine Block Heater IR	44001337
C185WKUB-FX-T4i	F08	Add-on, external, lockable tool storage	36099679
		Bumper	36099778
		Engine Block Heater IR	44001337
C185WJD-T4i	E43	Bumper	36099778
		Add-on, external, lockable tool storage	36099679
		Engine Block Heater JD	44008340
P185WJDU-T4i	D99	Engine Block Heater	44008340
		Spark Arrestor	44004430
		Fuel Gage w/ Low Fuel Shutdown	44038925
		Remote Control Panel	44038933
P185WJDU-FX-T4i		Engine Block Heater	44008340
		Spark Arrestor	44004430
		Fuel Gage w/ Low Fuel Shutdown	44038925
		Remote Control Panel	44038933
P185WJD-FX-T4i	F05	Fuel/Water Separator	44004364
		Engine Block Heater	44008340
		Spark Arrestor	44004430

Medium Compressors

Model	Serial Code	Part Description	Part Number
Medium Compressors T3			
HP375WCU-T3		Aftercooler w/ Water Separator	44012540
		Kit, Bumper	44037075
HP375WJD-T3	D54	Aftercooler w/ Water Separator	44012540
		Kit, Bumper	44037075
HP375WJD-FX-T3		Aftercooler w/ Water Separator	44012540
		Kit, Bumper	44037075
XP375WCU-T3		Aftercooler w/ Water Separator	44012540
		Kit, Bumper	44037075
XP375WJD-T3	C48	Aftercooler w/ Water Separator	44012540
		Kit, Bumper	44037075
XP375WJD-FX-T3		Aftercooler w/ Water Separator	44012540
		Kit, Bumper	44037075
VHP400WJD-T3	C56	Kit, IQ Replacement	44026094
		Kit, Water Separator Replacement	44026102
VHP400WJD-FX-T3		Kit, IQ Replacement	44026094
		Kit, Water Separator Replacement	44026102
VHP400WJD-EX-T3		Kit, IQ Replacement	44026094
		Kit, Water Separator Replacement	44026102
P425WJD-FX-T3		Aftercooler w/ Water Separator	44012540
		Kit, Bumper	44037075
P425WJD-T3	C46	Aftercooler w/ Water Separator	44012540
		Kit, Bumper	44037075
HP450WJD-T3	C55	Kit, IQ Replacement	44026094
		Kit, Water Separator Replacement	44026102
HP450WJD-FX-T3		Kit, IQ Replacement	44026094
		Kit, Water Separator Replacement	44026102
HP450WJD-EX-T3		Kit, IQ Replacement	44026094
		Kit, Water Separator Replacement	44026102
P600WJD-FX-T3		Kit, IQ Replacement	44026094
		Kit, Water Separator Replacement	44026102
P600WJD-EX-T3		Kit, IQ Replacement	44026094
		Kit, Water Separator Replacement	44026102
P600WJD-T3	C54	Kit, IQ Replacement	44026094
		Kit, Water Separator Replacement	44026102
Medium Compressors T4			
P425/HP375WCU-T4i		Kit, Bumper	44037075

Large Compressors

Model	Serial Code	Part Description	Part Number
Large Compressors T1-T3			
HP675EWCUC	B74	Auto Start Field Kit	44013159
		Field Kit, DC Start Compressor	44032175
HP750EWCUC	B76	Auto Start Field Kit	44013159
		Field Kit, DC Start Compressor	44032175
HP750 WCU FLEX	E19	Auto Start Field Kit	44013159
		Field Kit, DC Start Compressor	44032175
VHP750E W-CAT		Kit, Tie Down	46557188
XHP750 E W CAT	C44	Kit, OTBV Element 180 Deg High Humidity	22926794
		Kit, Tie Down	46557188
XP750EWCUC	B75	Auto Start Field Kit	44013159
		Field Kit, DC Start Compressor	44032175
XHP750 W CAT FLEX	E14	Kit, OTBV Element 180 Deg High Humidity	22926794
XHP750 W CAT EXPORT	E15	Kit, OTBV Element 180 Deg High Humidity	22926794
XP825EWCUC	B77	Auto Start Field Kit	44013159
		Field Kit, DC Start Compressor	44032175
XP825 WCU FLEX	E20	Auto Start Field Kit	44013159
		Field Kit, DC Start Compressor	44032175
XHP1070WCAT-T3	B41	Field Kit - Autostart w/ 120V Battery Charger	44008928
		Field Kit - Autostart w/ 240V Battery Charger	44021632
		Field Kit - Fuel Vent Crossover	44022994
XHP1170 FRAME- CAT-S FLEX	E11	Kit, Isolation Mounting	44022440
XHP1170 W CAT FLEX	E21	Field Kit - Autostart w/ 120V Battery Charger	44008928
		Field Kit - Autostart w/ 240V Battery Charger	44021632
		Field Kit - Fuel Vent Crossover	44022994
XHP1170 W CAT EXPORT	E37	Field Kit - Autostart w/ 120V Battery Charger	44008928
		Field Kit - Autostart w/ 240V Battery Charger	44021632
		Field Kit - Fuel Vent Crossover	44022994
XHP1170FCAT-S-EX-T3		Kit, Isolation Mounting	44022440
XHP1170WCAT-T3	B40	Field Kit - Autostart w/ 120V Battery Charger	44008928
		Field Kit - Autostart w/ 240V Battery Charger	44021632
		Field Kit - Fuel Vent Crossover	44022994
XHP1170WCAT-EU-FX-T3	E61	Field Kit - Autostart w/ 120V Battery Charger	44008928

Model	Serial Code	Part Description	Part Number
		Field Kit - Autostart w/ 240V Battery Charger	44021632
		Field Kit - Fuel Vent Crossover	44022994
HP1600 WCU EXPORT	E10	Field Kit - Autostart w/ 120V Battery Charger	44008928
		Field Kit - Autostart w/ 240V Battery Charger	44021632
		Field Kit - Fuel Vent Crossover	44022994
HP1600 WCU FLEX	E09	Field Kit - Autostart w/ 120V Battery Charger	44008928
		Field Kit - Autostart w/ 240V Battery Charger	44021632
		Field Kit - Fuel Vent Crossover	44022994
HP1600WCU-EU-FX-T3	E67	Field Kit - Autostart w/ 120V Battery Charger	44008928
		Field Kit - Autostart w/ 240V Battery Charger	44021632
		Field Kit - Fuel Vent Crossover	44022994
Large Compressors T4			
HP750WCU-T4i		Field Kit, Battery Charger	46630581
		Field Kit, Lrg w/Central Drains	46625117
		Field Kit, Cold Start Heaters 120V AC	46624864
		Field Kit, IQ System, XP825 & HP750WCU-T4i	46618120
XP825WCU-T4i		Field Kit, Battery Charger	46630581
		Field Kit, Lrg w/Central Drains	46625117
		Field Kit, Cold Start Heaters 120V AC	46624864
		Field Kit, IQ System, XP825 & HP750WCU-T4i	46618120
XHP1000WCAT-T4i		Field Kit, LRG Shock Mounts	46569068
		Field Kit, 120 VAC Heaters	46569079
		Field Kit, 240 VAC Heaters	46569080
		Field Kit, 120VAC Battery Charger	46569081
		Field Kit, 240VAC Battery Charger	46569082
		Field Kit, Remote fuel with electric pump and fuel water sep	46569083
		Field Kit, Autostart with 120VAC Battery Charger	46569084
		Field Kit, Autostart with 240VAC Battery Charger	46569085
XHP1170WCU-T4i		Fuel Vent Crossover	44022994

WOOL-PACKED PRODUCTS

Wool-Packed Separator Screens

The list below gives the length and diameter of all wool-pack separator screens for Doosan Portable units. The length includes the entire pipe nipple, and the diameter is of the wool-pack screen discs.

Separator Screen	Complete Length	Diameter
H11131TVC	39"	11 7/8"
H13585T	37 1/2"	7 7/8"
R26443T	20 3/8"	8 7/8"
35009281	37 1/4"	15 7/8"
35010768	14 1/8"	6 3/8"
35012673	13 5/8"	6 3/8"
35105725	27 15/16"	5 3/4"
35125541	35 1/2"	9 7/8"
35502756	39"	11 7/8"
35502764	39"	13 7/8"
35502772	41"	15 7/8"
35516251	29 13/16"	7 7/8"
35516269	28 1/8"	4 7/8"
35587377 (re-enforced)	39"	11 7/8"

Wool-Packed Kits

Doosan is pleased to announce a complete line of wool-pack kits. For the first time, a customer can repack his or her own wool separator screen. Listed below are the models affected, wool-pack kit part numbers and bare screens if needed.

Model	Wool-Packed Kit	Bare Screen	Complete Separator Element
R85, RR85, RB125	35076256	H16478	35516269
R105, R125	35077338	H13658	35105725
RA125, R150, Unipac 150	35077346	35712579	35010768
R160	35076249	H25172	35516251
R250 3	5076173	R26443	R26443T
R315, R365	35076207	H11194	35125541
R600, L600, XL750, XL850	35076215	H11131	35502756*
HP600	35076264	35830587	35587377
L900, XL900, XL750S	35076223	H22360	35502764*
L1200, XL1200, XL1400	35076231	R26716	35502772*
D1750, D2000	35076181	35711688	35009281**

* Elements now cross reference to commercial style elements.

** Commercial element 35577212 is available for these units.

VANE SETS / REPAIR KITS

Vane Sets

The list below consists of all the different vane sets used in Doosan Portable Compressor Airends. Their exact length and width is given for identification.

Part #	(Vaness measured at longest and widest point)	
	Length (inches)	Width (inches)
R85P110 (R85, RS85)	6.994	1.513
R125P110 (R125, R105)	8.488	1.490
R125P115 (R125, R105)	3.243	1.490
RA125P110 (RA125, R150)	9.985	1.490
RA125P115 (RA125, R150)	3.743	1.490
R210P110	11.234	1.8025
R210P115	4.241	1.8025
R250P110	12.981	1.8025
R250P115	4.866	1.8025
R315P110	16.980	1.8025
R315P115	6.364	1.8025
R365P110	14.482	2.115
R365P115	5.491	2.115
35105238 (R600)	23.224	2.115
35105246 (R600)	8.736	2.115
R900P110	23.224	2.115
R900P115	16.980	1.8025
35102094 (RR160)	7.867	1.8025
35101344 (RR85)	5.245	1.763
35104827 (RS125, RB125)	7.244	1.8025

Aluminum vanes are also available for the RR85 (35502491) and RR160 (35500750). These are not available in sets though, and must be ordered as eight individual items.

Portable Compressor Discharge Sizes

The listing below gives the discharge size (ball valve or outlet, whichever is applicable) for all P-line compressors. This should be helpful when sizing hose, lubricators or O.S.H.A. safety check valves.

100 thru 250 CFM	3/4" NPT (Female)
300 thru 425 CFM	1 1/4" NPT (Female)
P750WCU Family; P600WCU Family; AD55; AD85	2" NPT (Female)
XP600CWGM Family; XP750BWGM Family	2 1/2" NPT (Female)
All 1300, 1400, 1600 GM units	4" NPT (Female)
All remaining 525 thru 1600 CFM units AD165; AF1600	3" NPT (Female)

Blowdown Valve Diaphragm / Repair Kits

The listing below contains various blowdown valves and their corresponding repair kits or replacement diaphragm.

Valve	Repair Kit	Replacement Diaphragm	Diaphragm Dimensions
35229939		35173897	6 hole – 6 sided
			3 7/16" across
35120617		35297308	4 hole
			2 1/8" x 2 1/4"
35245455		35284264	6 hole – 6 sided
			3 1/2" across
		35284272	6 hole – 6 sided
			3 1/4" across
35307263	35289446		
35322379	35379064		
35335017	35379056		
35373208	35373216		6 hole – 6 sided
			3 5/16" across
35369149	35369156		2 7/8" circular diaphragm
35501337		35192129	4 hole – 4 sided
			3 3/16" across
36846376	36846582	(No Diaphragm)	
36853653		36860849	4 hole – 4 sided
			2 3/8" across

UL88 Regulator Repair Kits

Repair kits are available for all Statesville-built UL88 regulators. These kits contain the components necessary to overhaul the internals of the regulator. If you are not sure which kit to use, please follow the descriptions of the kits given below.

Doosan Kit Part #	For Regulator Assembly (Valve P/N)	Metering Pin	Comments
35230093 (W92604)			Metering pin diaphragm center hole - 21/32" dia.
35296961	36709699		Metering pin diaphragm center hole - 21/32" dia.
35216670 (W52536)	36701092		Metering pin diaphragm center hole - 7/16" dia.
35053800	36713659		Large internal spring is 1 1/2" long
35063643	36720217		Large internal spring is 2" long
36037471	36887396		Rotary drill applications only for regulator 36887396

UL89 Unloader Repair Kits

Repair kits include bushings, diaphragm, springs and seals.

Doosan Kit Part #	Airend Size	Complete Unloader
36039527	85 mm	N/A
36039535	100 mm	36718732; 35089721
35088798	127 mm, 178 mm	35060631
36039543	226 mm	36734515
36039550	285 mm	36729531

Miscellaneous Repair Kits

Assembly	Description	Doosan Repair Kit	Doosan Diaphragm Kit
35316405	Anti-rumble Valve	35325125	
35355106	Pressure Regulator		35387919
35359090	Pressure Regulator		35387919
35373117	Master Cylinder	35376433	
35598770	Min. Press. Valve	36006351	
35607522	Pressure Regulator	35387901	35387919
35612399	Air Motor	35612407	
35612415	Pressure Regulator	35612423	
35780592	Transducer	35282540	
36509446	Pressure Regulator	35387901	35387919
36781540	Pressure Regulator	35387901	35387919
36782886	Air Motor	35379668	
36847952	Pressure Regulator		35387919
36896892	Pressure Regulator	36134542	

DOOR KEYS, LATCHES AND SHOCKS

The following list gives information concerning door latches used on the “P-Line” equipment.

Door Latch	Type	Cylinder to Convert to Locking	Key	Dimensions
35279108	Locking	N/A	35378355	4 3/4" x 4" (with protruding “dog-ear” where key hole is located)
35337096	Locking	35333657	35378355	4 3/4" x 4"
35608827	Non-Locking	35333657	35378355	4 3/4" x 4" (double punch out)
36504579	Non-Locking	35374362	35378363	4 3/4" x 4" (single punch out)
36755908	Non-Locking	35333657	35378355	4 3/4" x 4"
36793602	Non-Locking (Slam Type)	36794345	35612746	

Additional Notes:

- ◇ Locking cylinder which uses 502 key has small “dog leg” piece of metal attached to the back of it
- ◇ All door latches are 4"x 4 3/4" except for 35279108, which has a protruding side where the locking cylinder is located
- ◇ 36755908 uses a large 4 1/2" catch plate on the back

Gas Springs / Door Shocks	Part #
70lb gas spring (most commonly used)	35600287
45lb gas spring (for access door on P250WD)	35600295
85lb gas spring	35600261
100lb gas spring	35083336
2 position gas spring (used on AirSource)	22664577

COMMON SWITCHES

Temperature						
Part #	Temp. (°F)	Type	Thread	Color	Terminals	
					Type	Number
35306174	100	N-C	3/8 NPT	Olive	Screw	1
35281286	160	N-C	1/2 NPT	White	Screw	1
35281278	205	N-C	1/2 NPT	Orange	Screw	1
35306067	207	N-O	1/2 NPT	Black	Screw	1
35358367	210	N-C	1/2 NPT	Blue	Screw	2
35604149	210	N-C	1/2 NPT	White	Screw	2
36864973	210	N-C	1/2-14	Black	Screw	2
35294933	215	N-C	1/2 NPT	Black	Screw	1
35327980	215	N-C	1/2 NPT	Black	Screw	2
35371673	215	N-C	3/8 NPT	Black	Screw	2
35315670	220	N-C	3/8 NPT	Black	Spade	1
35326982	220	N-C	1/2 NPT	Black	Spade	1
35327691	220	N-C	1/2 NPT	Red	Screw	2
36793396	220	N-C	3/8-18	Black	Spade	2
36880706	220	N-C	1/2-14	Red	Spade	2
36868479	225	N-C	3/8-18	Black	Spade	2
35511971	228	N-C	1/2 NPT	White	Screw	2
35511997	228	N-O	1/2 NPT	Red	Screw	2
35512011	228	N-C	1/2 NPT	Orange	Screw	2
36790798	228	N-C	1/2 NPT	White	Screw	2
36865624	228	N-C	1/2-14	White	Spade	2
35514116	240	N-C	1/2 NPT	Olive	Screw	2
35514306	245	N-C	1/2 NPT	Black	Wires	2
35511989	248	N-O	1/2 NPT	Blue	Screw	2
35576636	248	N-C	3/4-16	Olive	Screw	1
35577592	248	N-C	1/2 NPT	Black	Screw	2
35581719	248	N-O	3/4-16	Blue	Screw	2
35590983	248	N-C	3/4-16	Red	Screw	2
35596436	248	N-C	3/4-16	Black	Spade	2
36790780	248	N-C	3/4-16	Red	Screw	2
36865756	248	N-C	1/2-14	Black	Spade	2
35572023	265	N-O	1/2 NPT	Orange	Screw	2
35574920	265	N-C	1/2 NPT	Black	Screw	2
35584820	265	N-C	3/4-16	Black	Screw	1
36788503	266	N-C	14mm	Blue	Spade	2



Pressure					
Part #	PSI	Type	Thread	Terminals	
				Type	Number
36789469	2.5	N-O	1/8 NPT	Wire	2
36865749	2.5	N-O	1/8-27	Spade	2
36757581	12	N-O	1/8 NPT	Wire	2
36790764	12	N-O	1/8 NPT	Dual Wire	2
36878379	12	N-O	1/8-27	Spade	2
35143080	20	N-O	1/8 NPT	Screw	2
36757573	20	N-C	1/8 NPT	Wire	2
36790772	20	N-C	1/8 NPT	Dual Wire	2
35578590	25	N-O	1/8 NPT	Screw	2
36843423	25	N-O	1/8 NPT	Wire	2
35588326	43	N-O	1/8 NPT	Spade	2
36788719	55	N-C	1/4 NPT	Lug	2

LEGACY OIL COOLER/RADIATOR LIST

Model	Cooler	Type	Radiator	Comments
P175BWD	36760809	Alum	None	
P175CWD; P175DWD	36775534	Alum (Comp)	None	
	36776532	Alum (Eng)		
P175BWJD; P175CWJD	36775534	Alum	36776151	
P175DWJD	36882934	Alum	36881407	
XP175BWJD	36760809	Alum	35312164	
P185; P185AWJD	36715753	Steel	35312164	
	36705325	Alum	35312164	Alum cooler no longer used
	36760809	Alum	35312164	Began at 130789
P185BWJD	36760809	Alum	35312164	
P185CWJD; P185DWD	36775534	Alum	36776151	
P185EWJD	36882934	Alum	36880516	
P185WD	36775534	Alum (Comp)		
	36776532	Alum (Eng)		
P185AWD	36882934	Alum		2 coolers required
P185WJDU	36760809	Alum	35312164	
P185AWJDU	36889780	Alum	36889772	
P185WIR; XP185WIR	36882934	Alum	36880516	
P250WD	36718286	Alum	None	Cooler phased out 08/15/80
	36722858	Alum	None	Cooler phased in 08/15/80
P250AWD	36760957	Alum	None	
P250BWD	36760957	Alum	None	
P250SGM	36760957	Alum	36727600	
P250WJD; P250AWJD	36793560	Alum	36793552	
P250BWJD	36887669	Alum	36876233	
P250CWJD	36887669	Alum	36889772	
P250WIR	36887669	Alum	36889772	
P250WCU	36887669	Alum	36876233	
P250AWCU	36887669	Alum	36876233	
VHP300WIR	54738893	Alum	22056386	
P300WGM	36705002	Alum	36714087	
HP300WD	36747111	Alum	None	
HP300AWD	36747111	Alum	None	
HP300WCU	36842938	Alum	36842920	
HP300AWCU	36887669	Alum	36876233	
HP300BWCU	36887669	Alum	36887651	
HP300WJD	36887669	Alum	36876233	
HP320WD	36705416	Alum	None	
P335WGM	36705416	Alum	None	
HP365WIR	54738893	Alum	22056386	
XP375WIR	54616164	Alum	22056386	
P375WD	36705416	Alum	None	

Model	Cooler	Type	Radiator	Comments
P375AWD	36705416	Alum	None	
P375WCU	36842938	Alum	36842920	
P375AWCU	36887669	Alum	36876233	
P375BWCU	36887669	Alum	36887651	
P375WJD	36887669	Alum	36876233	
HP375AWD	36747111	Alum	None	
HP375WJD	54738893	Alum	22056386	
P260- D82	36887669	Alum	46492401	
C185- D80	22482277	Alum	36882934	
P185- D75	22482277	Alum	36882934	
P185- D76	22482277	Alum	36882934	
C185- D95	22482277	Alum	36882934	
P250- D81	36887669	Alum	46492401	
XP400AWD	36747111	Alum	None	
VHP400WCU	36842953	Alum	36842946	
VHP400AWCU	36842953	Alum	36887644	
P425WIR	54616164	Alum	22056386	
P425AWD	36747111	Alum	None	
P425	35995901	Steel	35996354	Back to back arrangement
	36703791	Alum	36714087	Side by side arrangement
HP425CAT	36711232	Alum	36711240	
P450WCAT	36711232	Alum	36711240	
HP450WCU	36842953	Alum	36842946	
HP450AWCU	36842953	Alum	36887644	
HP525	36703767	Alum	36708204	
HP525 A, B, C	36717643	Alum	36715464	Side by side arrangement
	36711737	Steel	36711729	Back to back arrangement
XP525WCU	36842953	Alum	36842946	
XP525AWCU	36842953	Alum	36887644	
HP600, A, B, WGM	36715605	Alum	36715464	Side by side arrangement
	36711737	Steel	36711729	Back to back arrangement
P600WCU	36842953	Alum	36842946	
P600AWCU	36842953	Alum	36887644	
XP600	35997741	Steel	35997618	
	36003767	Alum	36708204	
XP600 A, B, C, WGM	36717643	Alum	36715464	Sid by side arrangement
	36711737	Steel	36711729	Back to back arrangement
HP600 A, BWCU	36864320	Alum	36864585	
HP600CWCU	36866200	Alum	36866192	Used thru late 1995
	36877280			Used 1996 and above. Has 90" bypass tube elbow on bottom tank.
HP600WJD	36866200	Alum	36866192	Used thru late 1995
	36877280			Used 1996 and above. Has 90" bypass tube elbow on bottom tank.

Model	Cooler	Type	Radiator	Comments
XP600, AWCU	36864320	Alum	36864585	
XHP650, AWCAT	36883684	Alum	36757540	
P700	35997741	Steel	35997618	
	36703767	Alum	36708204	
P700A, B, C	36717643	Alum	36715464	Side by side arrangement
	36711737	Steel	36711729	Back to back arrangement
XP750, A, BWGM	36715605	Alum	36715464	Side by side arrangement
	36711737	Steel	36711729	Back to back arrangement
	36716140	Steel		Dun-Bush Option
XP750BWCU	36864320	Alum	36864585	
XP750CWCU	36866200	Alum	36866192	Used thru late 1995
	36877280			Used 1996 and above.
				Has 90" bypass tube elbow on bottom tank.
XP750WJD	36866200	Alum	36866192	Used thru late 1995
				Used 1996 and above. Has 90" bypass tube elbow on bottom tank.
XHP750SGM	36747137	Steel	36711844	Rad. Core section 35300698
XHP750AWCAT	36883684	Alum	36757540	
XHP750SCAT	36747137	Steel	36787588	
XHP750A, BWGM	36747137	Steel	36711844	Rad. Core section 35300698
	36720076	Alum	36711844	
P750AWCU	36864320	Alum	36864585	
HP750A, BWCU	36864320	Alum	36864585	
HP750CWCU	36866200	Alum	36877280	
HP750WJD	36866200	Alum	36877280	
VHP750WCU	36891703	Alum	36891687	
VHP750AWCAT	36891703	Alum	36891687	
HP825A, B, CWCU	36855880	Alum	36864585	
HP825DWCU	36891703	Alum	36891687	
VHP825WCU	36891703	Alum	36891687	
XP825A, BWCU	36864320	Alum	36864585	
XP825CWCU	36866220	Alum	36877280	
XP825WJD	36866200	Alum	36877280	
XHP825AWCAT	36883684	Alum	36757540	
P850A, BWGM	36715605	Alum	36715464	Side by side arrangement
	36711737	Steel	36711729	Back to back arrangement
	36716140	Steel		Dun-Bush Option
HP850A, BWGM	36747137	Steel	36711844	Rad. Core section 35300698
	36720076	Alum	36711844	
VHP850AWCAT	36891703	Alum	36891687	
P900A, BWCU	36864320	Alum	36864585	
XP900A, BWGM	36747137	Steel	36711844	Rad. Core section 35300698
	36720076	Alum	36711844	
XP900A, B, CWCU	36855880	Alum	36864585	

Model	Cooler	Type	Radiator	Comments
XP900DWCU	36891703	Alum	36891687	
XHP900AWCAT	36882561	Alum	36864387	
XHP900SCAT	36882561	Alum	36864387	
HP900AWCAT	36891703	Alum	36891687	
HP935WCU; HP915WCU	36891703	Alum	36891687	
HP1000WCU	36764348	Alum	36757540	
HP1000A, B, CWCU	36864395	Alum	36864387	
XP1000AWCAT	36891703	Alum	36891687	
XP1050WCU; XP1000WCU	36891703	Alum	36891687	
XHP1070WCAT	36884013	Alum	36884054	
XHP1070AWCAT	54627161	Alum	54501838	2 coolers required
P1100A, BWGM	36747137	Steel	36711844	Rad. Core section 35300698
XHP1170WCAT	54627161	Alum	54501838	2 coolers required
XP1200WCU	36764348	Alum	36757540	
XP1200A, B, CWCU	36864395	Alum	36864387	
P1300A, B, CWCU	36864395	Alum	36864387	
HP1300A, BWGM	36715688	Steel	36712081	See note 1
	36712867	Alum	36712081	See note 1
	36711968	Steel		Karmazin Option, See note 1
HP1300A, BWCU	36864395	Alum	36864387	
HP1300CWCU	54501853	Alum	54501838	2 coolers required
NXP1300AWCU	36770592	Alum	36770568	
XP1400A, BWGM	36715688	Steel	36712081	See note 1
	36712867	Alum 3	36712081	See note 1
	36711968	Steel		Karmazin Option, See note 1
XP1400A, BWCU	36864395	Alum	36864387	
P1600A, BWGM	36715688	Steel	36712081	See note 1
	36712867	Alum	36712081	See note 1
	36711968	Steel		Karmazin Option, See note 1
P1600A, BWCU	36864395	Alum	36864387	
HP1600CWCU	54501853	Alum	54501838	2 coolers required
DC24	None		36793552	
DC30	None		36866192	
DC40	None		36866192	
AF1600	36780872			
AD55	35612613			
AD85	35612654			
AD165	3685878			

Note: The steel aluminum coolers cannot be interchanged because of extensive changes in piping, sheet metal, etc. In addition the Karmazin Steel Cooler Option cannot be interchanged with the standard steel cooler. The Karmazin Cooler inlets and outlets are located on the side of the cooler about 1/3 of the way toward the center of that side. The Dun-Bush steel cooler inlet and outlet is on the side of the cooler at the extreme top and bottom of that side.

OIL COOLER/RADIATOR LIST

Model	Serial Code	Cooler	Comment	Radiator	Comment
P185GWJD Re-Rate	B73	36882934		36880516	
P425WJD-T3	C46	22150197	S/N prior 422727	22220487	
		46556828	S/N begin 422727		
HP375CWIR	C47	22150197	S/N prior 422728	22220487	
		46556828	S/N begin 422728		
XP375WJD-T3	C48	22150197	S/N prior 422729	22220487	
		46556828	S/N begin 422729		
HP450WJD-T3	C55	22872675		22872667	
VHP400WJD-T3	C56	22872675		22872667	
XP375BWIR	C71	22150197		22220487	
P425BWIR	C72	22150197		22220487	
HP375BWIR	C73	22150197		22220487	
VHP300BWIR	C74	22150197		22220487	
XP375BWIR	C75	22150197		22220487	
P425BWIR	C76	22150197		22220487	
HP375BWIR	C77	22150197		22220487	
VHP300BWIR	C78	22150197		22220487	
P600AWIR	C79	54738901		54738927	
HP450AWIR	C80	54738901		54738927	
VHP400AWIR	C81	54738901		54738927	
P600WIR-FLEX	C82	54738901		54738927	
HP450WIR-T2-FLEX	C83	54738901		54738927	
VHP400WIR-T2-FLEX	C84	54738901		54738927	
P600AWIR	C85	54738901		54738927	
HP450AWIR	C86	54738901		54738927	
VHP400AWIR	C87	54738901		54738927	
XP375BWIR	C99	22150197		22220487	
P425BWIR	D01	22150197		22220487	
HP375BWIR	D02	22150197		22220487	
VHP300BWIR	D03	22150197		22220487	
P185WIR-FLEX	D07	36882934		36880516	
P185WJD-CP	D08	36882934		36880516	thru 12/2004
				36881407	starting 12/2004
P185FWJD ABT AIRSOURCE	D09	36882934		36880516	thru 12/2005
				36881407	starting 12/2005
P135WIR-T4I	D10	36882934		36880516	
P185WJDR-T4I	D11	36882934		36880516	thru 12/2005
				36881407	starting 12/2005
AIRSOURCE P160BWIR TIER 4I	D12	36882934		22482277	
P260WIR-T3	D13	36887669		36889772	

Model	Serial Code	Cooler	Comment	Radiator	Comment
XP185WIR-T3	D14	36882934		3680516	
XP375WCU-T2	D44	22185391		22453021	
P425WCU-T2	D45	22150197		22453021	
HP375WCU-T2	D46	22185391		22453021	
P90WIRU-T4I	D50	22579288			
HP375WJD-T3	D54	22150197	S/N prior 422727	22220487	
		46556828	S/N begin 420563		
AIRSOURCE+JD-T4I	D68	36882934		22482277	
P185WJD-T4I	D75	36882934		22482277	
P185WYM-T4I	D76	36882934		22482277	
C185WKUB-T2	D80	36882934		22482277	
P250WJD-T3	D81	36887669		46492401	
P260/HP220WYM-T3	D82	36887669		46492401	
P185WJDU-T4I	D99	36889780		46492401	
C185WKUB-T2	E04	36882934		22482277	
SUPER STD VHP750 D W CU	B69	22126197		22150031	
SUPER STD MHP825 C W CU	B70	22502660		22502678	
SUPER STD HP915 B W CU	B71	22502660		22502678	
SPER STD XP1000 B W CU	B72	22502660		22502678	
HP675WCU-T3	B74	22155592		22697585	
XP750WCU-T3	B75	22155592		22697585	
HP750WCU-T3	B76	22155592		22697585	
XP825WCU-T3	B77	22155592		22697585	
XHP700AWCU	B79	22126197		89299861	
SHP750WCU	B80	22126197		89299861	
SHP750A W CAT	B95	22126197		89299861	
XHP700A W CAT	B96	22126197		89299861	
VHP750WCAT-T3	B97	22502660		22502678	
MHP825 W CAT	B98	54552880		89299861	
XHP750C W CAT	C01	22150213		89299861	
SHP825 W CAT	C02	22150213		89299861	
VHP750 W CAT	C03	22126197		89299861	
MHP825 W CAT	C04	54552880		89299861	
XP950 W CAT	C05	22126197		89299861	
HP675FWCU EXPORT	C07	22155337		36877280	
XP750WCU-T2	C08	22155337		36877280	
HP750WCU-T2	C09	22155337		36877280	
XP825WCU-T2	C10	22155337		36877280	
XHP750WCAT-T3	C44	22502660		22502678	
P600WJD-T3	C54	22872675		22872667	
MHP825WCU-T3	C59	22126197		22502678	

Model	Serial Code	Cooler	Comment	Radiator	Comment
HP915WCU-T3	C60	22126197		22502678	
XP1000WCU-T3	C61	22126197		22502678	
XHP750WCAT-ML-T3	D93	22502660		22502678	
XHP750WCAT-FX-T3	E14	22502660		22502678	
HP915WCU-FX-T3	E16	22126197		22502678	
MHP825WCU-FX-T3	E17	22126197		22502678	
XP1000WCU-FX-T3	E18	22126197		22502678	
HP750WCU-FX-T3	E19	22155592		22697585	
XP825WCU-FX-T3	E20	22155592		22697585	
XP750WCU-ML-T3	E33	22155592		22697585	
XHP975WCAT-T4I	E45	46569639		46587440	
XP825WCU-T4I	E47	46554058		46554059	
HP750WCU-T4I	E48	46554058		46554059	
XHP1170WCAT-T3	B40	54627161		54501838	
XHP1070WCAT-T3	B41	54627161		54501838	
XHP1170SCAT-T3	B42	54627161		54501838	
XHP1070B-S CAT (TIER 3)	B43	54627161		54501838	
XHP1170AWCU	B44	54627161		54501838	
HP1600WCU-T3	B83	54501853		22767453	
HP1300WCU-T3	B84	54501853		22767453	
XHP1170FCATS-T3	C97	54627161		22767453	
XXHP1270FCAT-T3	D58	23170400		23170392	
XHP1170-F-CAT TIER 3 C18 ENGINE	D65	54627161		22767453	
XHP1170CM-1800	D85	43214048		43214048	
XHP1070WCAT-ML-T3	D86	54627161		22767453	
HP1600WCU-FX-T3	E09	54501853		22767453	
HP1600WCU-T3	E10	54501853		22767453	
XHP1170FCATS-FX-T3	E11	54627161		22767453	
XXHP1270FCAT-FX-T3	E12	23170400		23170392	
XXHP1270FCAT-T3	E13	23170400		23170392	
XHP1170WCAT-FX-T3	E21	54627161		54501838	
XHP1170WCAT-T3	E37	54627161		54501838	
XHP1170 FCAT-S T3-EX	E42	54627161		22767453	
XHP1170FCATS-FX-T3	E92	54627161		22767453	
HP1600WCU-T4I	E97	46556491		46556490	

LEGACY COMPRESSOR MANUALS

Non P-Line Portable Compressor Manuals

Model	Driver	Serial Code	Parts Manual	Ops. & Maint. Manual	Comments
PTO-5	N/A	380	PCD484A	PCD496B	Covers all units
PTO-5M	N/A	376	PCD663	PCD666	Covers all units
PTO-7	N/A	382	PCD522A	PCD496B	Covers all units
PTO-7M	N/A	377	PCD664	PCD666	Covers all units
PTO-9-450	N/A	383	PCD524A	PCD496B	Covers all units
PTO-9-450M	N/A	378	PCD665	PCD666	Covers all units
PTO-9-600	N/A	384	PCD524A	PCD496B	Covers all units
PTO-9-600M	N/A	379	PCD665	PCD666	Covers all units
PTO-9-750M	N/A	386	PCD665	PCD666	Covers all units
PTO-750-HP-1800	N/A	385	PCD668	PCD667	Covers all units
PTO-750-HP-2100	N/A	387	PCD668	PCD667	Covers all units
3R36	N/A	800	2301H	2301H	Covers all units
GR85	Cont. F-163	100	E2285	E2285	Covers all units
GR85	Cont. F-140	N/A		E2283	Covers all units
G85 I.H.	UC135B	101	PCD75	PCD74	For units thru 61000
			PCD291	PCD291	For units above 61000
G85S	I.H. UC135B	110	PCD291	PCD291	Covers all units
GU85	I.H. UC135B	101	PCD291	PCD291	Covers all units
GU85S	I.H. UC135B	110	PCD291	PCD291	Covers all units
GH85	Her. G1600X74	109	PCD432A	PCD432A	Covers all units
GH85S	Her. G1600X74	109	PCD432A	PCD432A	Covers all units
GHU85	Her. G1600X74	113	PCD432A	PCD432A	Covers all units
GHRR85	Her. G1600X74	109	PCD432A	PCD432A	Covers all units
GHRR85S	Her. G1600X74	109	PCD432A	PCD432A	Covers all units
GRR85	I.H. UC135B	102	PCD62A	PCD60A	For units thru 61000
			PCD313	PCD313	For units above 61000
GRRU85	I.H. UC135B	103	PCD313	PCD313	Covers all units
GRR85S	I.H. UC135B	108	PCD313	PCD313	Covers all units
D85	Ford 175DF	120	PCD366	PCD366	Covers all units
D85S(85DBA)	Ford 175DF	120	PCD366	PCD366	Covers all units
D85S(90DBA)	Ford 175DF	120	PCD366	PCD366	Covers all units
DU85	Ford 175DF	120	PCD366	PCD366	Covers all units
DU85S	Ford 175DF	120	PCD366	PCD366	Covers all units
DRRF85	Ford 175DF	106	PCD366	PCD366	Covers all units
DRRF85S(85DBA)	Ford 175DF	106	PCD366	PCD366	Covers all units
DRRF85S(90DBA)	Ford 175DF	106	PCD366	PCD366	Covers all units

Model	Driver	Serial Code	Parts Manual	Ops. & Maint. Manual	Comments
RS85CW	N/A	104	C2355	C2355	Covers all units
RS85CCW	N/A	105	C2355	C2355	Covers all units
G105	I.H. UC200	145	PCD276	PCD276	Covers all units
D105	G.M. 2-53	146	PCD277	PCD277	Covers all units
DF105	Ford 254DF	147	PCD358	PCD358	Covers all units
GR105	Cont. F162	N/A	2274	D2274	Covers all units
DR105	Cont. GD157	N/A	D2274	D2274	Covers all units
GRB105	Cont. G193	N/A	PCD112	PCD113	Covers all units
DRB105	G.M. 2-53	N/A	PCD125	PCD113	Covers all units
GR125	Cont. F162	N/A	D2274	D2274	Covers all units
DR125	Cont. GD157	N/A	D2274	D2274	Covers all units
RS125CW	N/A	154	C2355	C2355	Covers all units
RS125CCW	N/A	155	C2355	C2355	Covers all units
G125	I.H. UC200	160	PCD265	PCD265	Covers all units
G125S	I.H. UC200	160	PCD265	PCD265	Covers all units
D125	G.M. 2-53	161	PCD266	PCD266	Covers all units
D125S	G.M. 2-53	161	PCD266	PCD266	Covers all units
DF125	Ford 254DF	162	PCD358	PCD358	Covers all units
DF125S	Ford 245DF	162	PCD358	PCD358	Covers all units
D125RMC	G.M. 2-53	163	N/A	N/A	Covers all units
GRA 125	Cont. G193	N/A	C2332	C2332	Covers all units
DRA125	Cont. GD193	N/A	C2332	C2332	Covers all units
DRA125RMS	Cont. GD193	159	N/A	N/A	
GRB125	Cont. G193	150	A2250	A2250	Covers all units
GRBU125	Cont. G193	151	A2250	A2250	Covers all units
DRB125	G.M. 2-53	152	A2250	A2250	Covers all units
DRBU125	G.M. 2-53	153	A2250	A2250	Covers all units
G150	I.H. UC200	211	PCD262A	PCD262A	Covers all units
G150S	I.H. UC200	211	PCD262A	PCD262A	Covers all units
D150	G.M. 2-53	213	PCD263A	PCD263A	Covers all units
D150S	G.M. 2-53	213	PCD263A	PCD263A	Covers all units
DF150	Ford 254DF	215	PCD356	PCD356	Covers all units
DFF150	Ford 192	217	PCD423	PCD423	Covers all units
G150B	I.H. UC200	220	PCD278	PCD278	Covers all units
GR150	Cont. G193	200	A2290	A2290	Covers all units
GRU150	Cont. G193	201	A2290	A2290	Covers all units
GR150S	Cont. G193	208	A2290	A2290	Covers all units
DR150	G.M. 2-53	202	A2290	A2290	Covers all units
DRU150	G.M. 2-53	203	A2290	A2290	Covers all units
GRB150	Cont. G193	206	PCD46	PCD45	Covers all units
GRBU150	Cont. G193	207	PCD46	PCD45	Covers all units
G160SL	I.H. UC20	255	PCD475	PCD475	Covers all units
GH160	Her. G2300	254	PCD424	PCD424	Covers all units
GHU160	Her. G2300	254	PCD424	PCD424	Covers all units
GH160S	Her. G2300	254	PCD424	PCD424	Covers all units

Model	Driver	Serial Code	Parts Manual	Ops. & Maint. Manual	Comments
GIH160	I.H. C196	249	PCD631	PCD631	Covers all units
DRRD160	Deutz F4L912	253	PCD487	PCD487	Covers all units
DRRD160	Deutz F4L912	253	PCD487	PCD487	Covers all units
DRRD160S	Deutz F4L912	257	PCD487	PCD487	Covers all units
DRRF160	Ford D254	263	PCD284A	PCD284A	Covers all units
DRRF160S	Ford D254	263	PCD284A	PCD284A	Covers all units
GRR160	I.H. UC200	250	PCD88A	PCD88A	For units thru 66000
			PCD362	PCD362	For units above 66000
GRRU160	I.H. UC200	251	PCD88A	PCD88A	For units thru 66000
			PCD362	PCD362	For units above 66000
GRR160S	I.H. UC200	250	PCD362	PCD362	Covers all units
DRR160	I.H. D239	252	PCD88A	PCD88A	For units thru 66000
	PCD294A		PCD294A		For units above 66000
DRRU160	I.H. D239	252	PCD88A	PCD88A	For units thru 66000
			PCD294A	PCD294A	For units above 66000
DRR160S	I.H. D239	252	PCD294A	PCD294A	Covers all units
GXL175	Her. G2300	300	PCD91A	PCD89A	Covers all units
GXLU175	Her. G2300	301	PCD91A	PCD89A	Covers all units
DXL175	Her. D2300	304	PCD91A	PCD89A	Covers all units
DXLU175	Her. D2300	305	PCD91A	PCD89A	Covers all units
DXLGM175	G.M. 3-53N	N/A	PCD165	PCD130	Covers all units
G175	I.H. UC200	311	PCD260A	PCD260A	Covers all units
G175S	I.H. UC200	311	PCD260A	PCD260A	Covers all units
D175	G.M. 3-53	313	PCD261B	PCD261B	Covers all units
D175S	G.M. 3-53	313	PCD261B	PCD261B	Covers all units
GR210	Cont. M330	N/A	D2274	D2274	Covers all units
DR210	G.M. 4-51	N/A	D2274	D2274	Covers all units
GR250(2wh)	Cont. M363	350	C2335	C2335	Covers all units
GR250(4wh)	Cont. M363	351	C2335	C2335	Covers all units
DR250	G.M. 4-53	353	C2335	C2335	For units thru 71000
			PCD316A	PCD316A	For units 71001-81800
			PCD316B	PCD316B	For units above 81800
DR250SL	G.M. 4-53	N/A	PCD325	PCD325	Covers all units
RMS250	G.M. 4-53	370	N/A	N/A	Covers all units
DR270	G.M. 4-53	371	PCD686	PCD686	Covers all units

Model	Driver	Serial Code	Parts Manual	Ops. & Maint. Manual	Comments
GR315	Cont. B427	N/A	D2274	D2274	Covers all units
DR315	G.M. 3-71	N/A	D2274	D2274	Covers all units
DRU365	G.M. 4-71	N/A	PCD711	PCD711	Covers all units
DR365	G.M. 4-71	400	C2338	C2338	For units thru 67845
			PCD323	PCD323	For units above 67845
DR365SL	G.M. 4-71	N/A	PCD326	PCD326	Covers all units
DXL525AH	G.M. 6V53	959	35068691	35068683	For units thru 125599
			PCD837	PCD837	For units above 125599
DXL525BH	G.M. 6V53	464	PCD869	PCD869	Covers all units
DR600	G.M. 6-71	500	D2274	D2274	For units thru 58500
			PCD295A	PCD295A	For units above 58500
DR600T	G.M. 6-71	502	PCD295A	PCD295A	Covers all units
ER600	N/A	N/A	M1498-4B1	M1498-4B1	Covers all units
DL600	G.M. 6V71	N/A	B2362	B2362	Covers all units
EL600 (50cy)	N/A	504	M4104-4P	M4103-41	Covers all units
EL600 (60cy)	N/A	503	M4104-4P	M4103-41	Covers all units
DXL600H	G.M. 6V71	510	PCD386	PCD386	Covers all units
DXL600HS	G.M. 6V71	511	PCD387	PCD387	Covers all units
DXL600AH	G.M. 6V71	514	35066851	35066844	For units thru 126154
			PCD840	PCD840	For units above 126154
DXL600BH	G.M. 6V71	517	PCD870	PCD870	Covers all units
DXL600AP	G.M. 6V53	513	35066810	35066802	For units thru 125604
			PCD838	PCD838	For units above 125604
DXL600BP	G.M. 6V53	467	PCD869	PCD869	Covers all units
DXLCA600H	CAT3306T	516	PCD774	PCD773	For units thru 125040
			PCD849	PCD849	For units above 125040
DXL600ACAT	CAT3208DINA	518	35337641	35337641	Covers all units
DXL600AHCAT	CAT3208DINA	465	35337641	35337641	Covers all units
DXL700ACAT	CAT3208DINA	542	35337641	35337641	Covers all units
DXL700A	G.M. 6V53	539	35066810	35066802	For units thru 125604
			PCD839	PCD839	For units above 125604
DXL700B	G.M. 6V53	479	PCD869	PCD869	Covers all units

Model	Driver	Serial Code	Parts Manual	Ops. & Maint. Manual	Comments
DXL750	G.M. 6V71	550	PCD221	PCD221	For units thru 71850
			PCD221A	PCD221A	For units 71851-77821
			PCD221B	PCD221B	For units 77822-93298
			PCD221D	PCD221D	For units above 93298
DXL750AP	G.M. 6V71	547	35066836	35066828	For units thru 125106
			PCD841	PCD841	For units above 125106
DXL750BP	G.M. 6V71	546	PCD870	PCD870	Covers all units
DXL750-P/T	G.M. 6V71	549	PCD652	PCD652	Covers all units
DXL750S	G.M. 6V71	551	PCD322	PCD322	For units thru 77820
			PCD322A	PCD322A	For units 77821-93298
			PCD322B	PCD322B	For units above 93298
EXL750 (50cyl)	N/A	553	N/A	N/A	
EXL750 (60cyl)	N/A	552	N/A	N/A	
DXLCA750	CAT3306T	548	35064955	35064948	For units thru 125097
			PCD850	PCD850	For units 125098 thru 129804
			PCD904	PCD904	For units above 129804
DXL750ACAT	CAT3208DIT	545	35337641	35337641	Covers all units
D750	CUM V903	557	PCD359A	PCD359A	For units thru 100365
			PCD688A	PCD688A	For units above 100365
D750T	CUM V903	557	PCD359A	PCD359A	Covers all units
D750S	CUM V903	559	PCD429	PCD429	Covers all units
DXL850	G.M. 6V71	560	PCD257	PCD257	For units thru 72084
			PCD257A	PCD257A	For units above 72084
DXL850A	G.M. 6V71	565	35066836	35066828	For units thru 125122
			PCD842	PCD842	For units above 125122
DXL850B	G.M. 6V71	566	PCD870	PCD870	Covers all units
DXL850S	G.M. 6V71	561	PCD390	PCD390	Covers all units
DXL850H	G.M. 8V71	570	PCD388	PCD388	For units thru 125566

Model	Driver	Serial Code	Parts Manual	Ops. & Maint. Manual	Comments
			PCD843	PCD843	For units above 125566
DXL850HS	G.M. 8V71	571	PCD389	PCD389	Covers all units
DXLCA850	CAT3306T	563	35064955	35064948	For units thru 125097
			PCD851	PCD851	For units 125098-129804
			PCD904	PCD904	For units above 129804
DXL850ACAT	CAT3208DIT	564	35337641	35337641	Covers all units
DR900	G.M. 6-110		N/A	N/A C2282	Covers all units
DL900	G.M. 8V71		N/A	A2365 A2365	Covers all units
EL900 (50cyl)	N/A	607	M3261-4P	M3155-41	Covers all units
EL900 (60cyl)	N/A	605	M3261-4P	M3155-41	Covers all units
EXL900 (50cyl)	N/A	606	N/A	N/A	
EXL900 (60cyl)	N/A	603	N/A	N/A	
DXL900	G.M. 8V71	600	PCD95A	PCD92B	For units thru 71000
			PCD243	PCD243	For units 71001-73648
			PCD243A	PCD243A	For units 73649-107700
			35071018	35071000	For units 107701-125572
			PCD844	PCD844	For units above 125572
DXL900S	G.M. 8V71	602	PCD315	PCD315	For units thru 81000
			PCD315A	PCD315A	For units above 81000
DXLCU900	CUM V903	601	PCD192;	PCD95A PCD111	For units thru 75326
			PCD287A	PCD287A	For units above 75326
DXL900T	G.M. 8V71	604	PCD243A	PCD243A	Covers all units
DXLCU1050	CUMV903	620	PCD95A; PCD192	PCD111	For units thru 74171
			PCD281A	PCD281A	For units above 74171
DXL1100	G.M. 8V71	630	PCD258	PCD258	For units thru 74206
			PCD258A	PCD258A	For units 74207-107700
			35071034	35071026	For units 107701-125588

Model	Driver	Serial Code	Parts Manual	Ops. & Maint. Manual	Comments
			PCD845	PCD845	For units above 125588
DXL1100S	G.M. 8V71	631	PCD345	PCD345	Covers all units
DXL1100H	G.M. 12V71	640	PCD468	PCD468	For units thru 125127
			PCD846	PCD846	For units 125128-129886
			PCD872	PCD872	For units above 129886
DXL1100HS	G.M. 12V71	641	PCD589	PCD589	Covers all units
DL1200	G.M. 12V71	N/A	B2358	B2358	Covers all units
EL1200 (50cyl)	N/A	656	M4093-4P	M4092-41	Covers all units
EL1200 (60cyl)	N/A	654	M4093-4P	M4092-41	Covers all units
EXL1200 (50cyl)	N/A	655	N/A	N/A	
EXL1200 (60cyl)	N/A	653	N/A	N/A	
DXL1200	G.M. 12V71	650	PCD96A	PCD92B	For units thru 74426
			PCD244	PCD244	For units 74427-79899
			PCD244B	PCD244B	For units 79900-82852
			PCD244C	PCD244C	For units 82853-105863
			35071059	35071042	For units 105863-125127
			PCD847	PCD847	For units 125128-129877
			PCD872	PCD872	For units above 129877
DXL1200S	G.M. 12V71	652	PCD220	PCD220	For units thru 75132
			PCD349	PCD349	For units above 75132
DXLCA1200	CAT D343TA	651	PCD96A; PCD193	PCD92B; PCD166	Covers all units
DXL1400	G M. 12V71	670	PCD259	PCD259	For units thru 76699
			PCD259B	PCD259B	For units 76700-105863
			35071075	35071067	For units 105864-125142
			PCD848	PCD848	For units 125143-129877

Model	Driver	Serial Code	Parts Manual	Ops. & Maint. Manual	Comments
			PCD872	PCD872	For units above 129877
DXL1400S	G M. 12V71	671	PCD391	PCD391	Covers all units
D1750	G M. 12V71	740	PCD245	PCD245	Covers all units
D1750S	G M. 12V71	741	PCD567	PCD567	Covers all units
D1750A	G.M. 12V71	740	PCD530A	PCD530A	Covers all units
D2000	G M. 16V71	750	PCD242A	PCD242A	Covers all units
D2000S	G M. 16V71	751	PCD402	PCD402	Covers all units
D2000A	G.M. 16V71	748	N/A	N/A	
E2100	N/A	752	PCD264	PCD264	Covers all units
E2100(200PSI)	N/A	752	PCD352	PCD352	Covers all units
E2100 (IR)	N/A	752	PCD413	PCD413	Covers all units
E2100 (Del.)	N/A	752	N/A	N/A	
D2300	G M. 16V71	770	N/A	N/A	
D2500	G.M. 16V71	771	N/A	N/A	
DXL2500	G.M. 16V71	772	N/A	N/A	
DXL2500S	G.M. 16V71	773	N/A	N/A	
DXL5000S	G.M. 16V71	N/A	PCD632	PCD632	Covers all units
XHP15SD(MC2A)	DeutzF1L208F	189	N/A	N/A	Covers all units
P90WIR	IR 3IRL2N	089	54526694	54526702	
P100WW	White G1600	901	35062348	35062330	For units thru 121550
			PCD785	PCD785	For units above 12155
P100AWW	White G1600	134	PCD817	PCD817	For units thru 128867
			PCD875	PCD875	For units above 128867
P100BWW	White G1600	138	35358480	35358480	Covers all units
P100WWU	White G1600	900	35071174	35071166	For units thru 121550
			PCD784	PCD784	For units above 121550
P100AWWU	White G1600	135	PCD832	PCD832	Covers all units
P100WD	Deutz F2L912	910	35071091	35071083	For units thru 121696
			PCD788	PCD788	For units above 121696
P100AWD	Deutz F2L511D	911	PCD876	PCD876	Covers all units
P100BWD	Deutz F2L511D	167	35371061	PCD876	Covers all units
P100CWD	Deutz F2L511D	136	35369834	35369834	Covers all units
P100DWD	Deutz F3L1011	198	35378603	35378603	Covers all units
P100EWD	Deutz F3M1011F	245	35389816	35389816	Covers all units
P100FWD	Deutz F3M1011F	209	35391713	35391713	Covers all units

Model	Driver	Serial Code	Parts Manual	Ops. & Maint. Manual	Comments
P100SD	Deutz F2L912	909	35071117	35071109	For units thru 121696
			PCD787	PCD787	For units above 121696
P100WF	Ford LSG423IR	139	35365410	35365410	Covers all units
P100AWF	Ford LSG4231	125	35374636	35374636	Covers all units
P100BWF	Ford LSG4231	124	35378595	35378595	Covers all units
P100WFU	Ford LSG423IR	141	35369842	35369842	Covers all units
P100WJD	J.D. 3029 IR	210	35391705	35391705	Covers all units
P100WJDU	J.D. 3179 IR	144	35386721	35386721	Covers all units
P110AWD	Deutz F2L511D	149	PCD876	PCD876	Covers all units
P110BWD	Deutz F2L511D	166	35371061	PCD876	Covers all units
P110CWD	Deutz F2L511D	165	35369834	35369834	Covers all units
P110WIR	IR 4IRL5N	118	54531520	54531520	
P125WW	White G1600	917	35054246	35054295	For units thru 121550
			PCD786	PCD786	For units above 121550
P125AWW	White G1600	170	PCD818	PCD818	For units thru 128867
			PCD875	PCD875	For units above 128867
P125BWW	White G1600	171	35358480	35358480	Covers all units
P125WD	Deutz F3L912	903	35068600	35068592	For units thru 121288
			PCD792	PCD792	For units above 121288
P125AWD	Deutz F3L912	169	PCD821	PCD821	For units thru 129943
			PCD894	PCD894	For units above 129943
P125BWD	Deutz F3L912	183	35374446	35374446	Covers all units
P125DWD	Deutz F3L1011	199	35378603	35378603	Covers all units
P125EWD	Deutz F3M1011F	274	35389816	35389816	Covers all units
P125FWD	Deutz F3M1011F	223	35391713	35391713	Covers all units
P125WF	Ford LSG4231IR	168	35365410	35365410	Covers all units
P125AWF	Ford LSG4231	184	35374636	35374636	Covers all units
P125BWF	Ford LSG4231	197	35378595	35378595	Covers all units
P125WFU	Ford LSG4231IR	156	35369842	35369842	Covers all units
P125WJD	J.D. 3179D	158	35369826	35369826	Covers all units
P125AWJD	J.D. 3179DF	123	35374065	35374065	Covers all units
P125BWJD	J.D. 3029	224	35391705	35391705	Covers all units
P125WJDU	J.D. 3179IR	157	35386721	35386721	Covers all units

Model	Driver	Serial Code	Parts Manual	Ops. & Maint. Manual	Comments
P130AWJDU	J.D.3029	228	35393065	35393065	Covers all units
P130WJD	J.D. 3179DF	173	35369826	35369826	Covers all units
P130AWJD	J.D. 3179DF	172	5374065	35374065	Covers all units
P130BWJD	J.D. 3179D	275	35380245	35380245	Covers all units
P130CWJD	J.D. 3179D	276	35387042	35387042	Covers all units
P130DWJD	J.D. 3029	214	35391705	35391705	Covers all units
P130WD	Deutz F3M1011F	212	35391713	35391713	Covers all units
P135WIR	IR 4IRL5N	242	54531520	54531520	
P150WJD	J.D. 3179D	177	35353200	35353200	Covers all units
P150WW	White G1600	906	35068311	35068303	For units thru 121653
P150AWW	White G1600	175	PCD822	PCD822	For units thru 129288
			PCD893	PCD893	For units above 129288
P150WD	Deutz F3L912	905	35067552	35067545	For units thru 121288
			PCD793	PCD793	For units above 121288
P150AWD	Deutz F3L912	174	PCD819	PCD819	For units thru 129943
			PCD894	PCD894	For units above 129943
P150BWD	Deutz F3L912	176	35374446	35374446	Covers all units
P160WJD	J.D. 3179D	179	35353200	35353200	Covers all units
P160AWJD	J.D. 3179DF	178	35374610	35374610	Covers all units
P160BWJD	J.D. 3179D	264	35380245	35380245	Covers all units
P160CWJD	J.D. 3179D	283	35387042	35387042	Covers all units
P160DWJD	J.D. 3029	216	35391705	35391705	Covers all units
P160WJDU	J.D. 3179IR	188	35386721	35386721	Covers all units
P160WFU	Ford LSG4231IR	187	35369842	35369842	Covers all units
P160AWW	White G1600	181	PCD893	PCD893	Covers all units
P160AWWU	White G1600	182	PCD823	PCD823	Covers all units
P160BWW	White G1600	186	35374628	35374628	Covers all units
P175WW	White G1600	919	35071414	35071406	For units thru 121653
			PCD791	PCD791	For units above 121653
P175AWW	White G1600	923	PCD820	PCD820	For units thru 129288
			PCD893	PCD893	For units above 129288
P175BWW	White G1600	319	35374628	35374628	Covers all units
P175WWU	White G1600	920	35071430	35071422	For units thru 121737

Model	Driver	Serial Code	Parts Manual	Ops. & Maint. Manual	Comments
			PCD790	PCD790	For units above 121737
P175AWWU	White G1600	926	PCD823	PCD823	Covers all units
P175WD	Deutz F3L912	928	35071497	35071489	For units thru 121288
			PCD796	PCD796	For units above 121288
P175AWD	Deutz F3L912	953	PCD815	PCD815	For units thru 129943
			PCD894	PCD894	For units above 129943
P175BWD	Deutz F3L912	317	35374446	35374446	Covers all units
P175CWD	Deutz F4L1011E	324	35380161	35380161	Covers all units
P175DWD	Deutz F4L1011E	326	35387067	35387067	Covers all units
P175WDU	Deutz F3L912	921	35071455	35071448	For units thru 121288
			PCD795	PCD795	For units above 121288
P175AWDU	Deutz F3L912	954	PCD824	PCD824	Covers all units
P175SD	Deutz F3L912	927	35071471	35071463	For units thru 121288
			PCD794	PCD794	For units above 121288
P175ASD	Deutz F3L912	955	PCD816	PCD816	For units thru 129943
			PCD894	PCD894	For units above 129943
P175BWJD	J.D. 3179D	309	35380245	35380245	Covers all units
P175CWJD	J.D. 3179D	282	35387042	35387042	Covers all units
P175DWJD	J.D. 3029	218	35391705	35391705	Covers all units
XP175AWJD	J.D. 4239DF	956	35337518	35337518	Covers all units
XP175ASJD	J.D. 4239DF	N/A	35337518	35337518	Covers all units
XP175BWJD	J.D. 4239DF	307	35374602	35374602	Covers all units
P175WJDU	J.D. 3179IR	315	35386721	35386721	Covers all units
P175AWJDU	J.D. 3029	310	35393065	35393065	Covers all units
P175WJDU-GPC	J.D. 3179	314	35380302	35380302	Covers all units
P175WFU	Ford LSG4231IR	316	35369842	35369842	Covers all units
P185WD	Deutz F4M1011F	286	35389733	35389733	Covers all units
P185AWD	Deutz F4M1011F	219	35391713	35391713	Covers all units
P185WJD	J.D. 4219D	932	35071190	35071182	For units thru 121445

Model	Driver	Serial Code	Parts Manual	Ops. & Maint. Manual	Comments
			PCD780	PCD780	For units above 121445
P185AWJD	J.D. 4219D; J.D. 4239DF	957	PCD813	PCD813	For units thru 129657
			35337518	35337518	For units above 129657
P185BWJD	J.D. 4239DF	329	35374602	35374602	Covers all units
P185CWJD	J.D. 4039D	328	35380294	35380294	Covers all units
P185DWJD	J.D. 4039D	327	35389865	35389865	Covers all units
P185EWJD	J.D. 4045D	221	35391705	35391705	Covers all units
P185SJD	J.D. 4219D	916	35071216	35071208	For units thru 121445
P185ASJD	J.D. 4239DF	958	PCD814	PCD814	For units thru 129657
			35337518	35337518	For units above 129657
P185WW	White G1600	915	35063759	35063742	Covers all units
P185AWW	White G1600	914	PCD893	PCD893	Covers all units
P185BWW	White G1600	330	35374628	35374628	Covers all units
P185WJDU	J.D. 3179T	296	35386721	35386721	Covers all units
P185AWJDU	J.D. 4045	297	35393065	35393065	Covers all units
P185WIR	IR 4IRJ7N	295	54437173	54437173	Covers all units
XP185WIR	IR 4IRJ7T	288	54437173	54437173	
XP185CWJD	J.D. 4039D	308	35380294	35380294	Covers all units
XP185DWJD	J.D. 4039D	281	35389865	35389865	Covers all units
XP185EWJD	J.D. 4045D	222	35391705	35391705	Covers all units
P250SGM	G.M. 3-53	949	PCD827	PCD827	Covers all units
P250WD	Deutz F4L912	904	35071588	35071570	For units thru 120029
			PCD812	PCD812	For units above 120029
P250AWD	Deutz F4L912	367	35362284	35362284	Covers all units
P250BWD	Deutz F4L912	365	35374909	35374909	Covers all units
P250SD	Deutz F4L912	902	N/A	N/A	
P250WDM-H268	Deutz F4L912	369	35362565	35362565	
P250WDM-0595	Deutz F4L912	368	35365014	35365014	
P250WJD	J.D. 4039D	364	35380344	35380344	Covers all units
P250AWJD	J.D. 4039D	362	35387059	35387059	Covers all units
P250BWJD	J.D. 4045D	359	35390095	35390095	Covers all units
P250CWJD	J.D. 4045	394	35393958	35393958	Covers all units
P250WJD-DCSC	J.D. 4039D	363	35380575	35380575	Covers all units
P250WCU	CUM 4B3.9C76	358	35390087	35390087	Covers all units
P250AWCU	CUM 4B3.9	349	35392877	35392877	Covers all units
P250WIR	IR 4IRJ7T	389	35393966	35393966	Covers all units
P260WIR	IR 4IRJ7T	389	35393966	35393966	
HP300WCU	CUM 6B5.9	411	35380609	35380609	Covers all units

Model	Driver	Serial Code	Parts Manual	Ops. & Maint. Manual	Comments
HP300AWCU	CUM 4B3.9C116	397	35390087	35390087	Covers all units
HP300BWCU	CUM 4BT3.9C110	396	35392877	35392877	
HP300WJD	J.D. 4045T	398	35390095	35390095	Covers all units
HP300WD	Deutz BF6L913	374	PCD858	PCD858	Covers all units
VHP300AWD	Deutz BF6L913	388	35380146	35380146	Covers all units
VHP300WIR	IR 4IRB7T	063	54720784	54720784	
P300WGM	G.M. 3-53	934	35056266	35056274	For units thru 108926
			PCD778	PCD778	For units above 108926
P300SGM	G.M. 3-53	933	35060169	35060367	For units thru 114923
			PCD777	PCD777	For units above 114923
HP320WD	Deutz F6L912	390	PCD858	PCD858	Covers all units
P335WD	Deutz F5L912	937	35056340	35056357	For units thru 108926
			PCD798	PCD798	For units above 108926
P335SD	Deutz F5L912	936	35060599	35060581	For units thru 114874
			PCD797	PCD797	For units above 114874
HP365WIR	IR 4IRB7T	062	54720784	54720784	
XP375WIR	IR 4IRB7T	061	54720784	54720784	
P375WCU	CUM 6B5.9	410	35380609	35380609	Covers all units
P375AWCU	CUM 4B3.9C116	412	35390087	35390087	Covers all units
P375BWCU	CUM 4BT3.9C110	413	35392877	35392877	Covers all units
P375WJD	J.D. 4045T	414	35390095	35390095	Covers all units
P375WD	Deutz F6L912	942	PCD858	PCD858	Covers all units
P375AWD	Deutz F6L912	408	35374917	35374917	Covers all units
HP375AWD	Deutz BF6L913	391	35380146	35380146	Covers all units
HP375WJD	J.D. PE4045	064	54720784	54720784	
P375SD	Deutz F6L912	943	PCD858	PCD858	Covers all units
P375WDM-0712	Deutz F6L912	948	35365162	35365162	Covers all units
P375WCU-M8034	CUM L10	482	35368653	35368653	Covers all units
VHP400WCU	CUM 6BTA5.9	421	35389907	35389907	Covers all units
VHP400AWCU	CUM 6B-174	422	35392893	35392893	Covers all units
XP400AWD	Deutz BF6L913	392	35380146	35380146	Covers all units
P425WIR	IR 4IRB7T	060	54720784	54720784	
P425AWD	Deutz BF6L913	393	35380146	35380146	Covers all units

Model	Driver	Serial Code	Parts Manual	Ops. & Maint. Manual	Comments
P425WGM	G.M. 4-53	946	35056407	35056415	For units thru 114006
			PCD783	PCD783	For units above 114006
P425SGM	G.M.4-53	945	35061100	35061092	For units thru 114006
			PCD782	PCD782	For units above 114006
HP425SCA	CAT3208	440	PCD887	PCD887	Covers all units
P450SCA	CAT3208	947	35054824	35054816	For units thru 120889
HP450SCA	CAT3208	440	PCD887	PCD887	Covers all units
HP450WCU	CUM 6BTA5.9	433	35389907	35389907	Covers all units
HP450AWCU	CUM 6B-174	443	35392893	35392893	Covers all units
HP525SGM	G.M. 6V53	990	PCD547A	PCD545A; PCD546A Covers all units	
HP525WGM	G.M. 6V53	991	35056662	35056670	Covers all units
HP525AWGM	G.M. 6V53	962	35063965	35068204	For units thru 120486
			35068212	35068204	For units above 120486
HP525BWGM	G.M. 6V53	062	PCD799	PCD799	Covers all units
HP525CWGM	G.M. 6V53	463	PCD866	PCD866	Covers all units
XP525WCU	CUM 6BTA5.9	432	35389907	35389907	Covers all units
XP525AWCU	CUM 6B-174	442	35392893	35392893	Covers all units
P600WCU	CUM 6BTA5.9	434	35389907	35389907	Covers all units
P600AWCU	CUM 6B-174	441	35392893	35392893	Covers all units
P600WCU-M8034	CUM L10	473	35368661	35368661	Covers all units
P600SGM-C0340	G.M. 6V53N	997	35064997	35064989	Covers all units
HP600WGM	G.M. 6V71	968	35056753	35067230	For units thru 108847
			35067248	35067230	For units above 108847
HP600AWGM	G.M. 6V71	471	PCD802	PCD802	Covers all units
HP600BWGM	G.M. 6V71	472	PCD864	PCD864	Covers all units
HP600WCU	CUM L10	466	35359512	35359512	For units thru 199837
			35380559	35380559	For units above 199837
HP600AWCU	CUM LT10C	529	35386598	35386598	Covers all units
HP600BWCU	CUM LT10C	712	35386952	35386952	Covers all units
HP600CWCU	CUM 6CTA8.3	720	35389915	35389915	Covers all units
HP600WJD	J.D. 6076A	719	35389923	35389923	Covers all units
XP600SGM	G.M. 6V53	963	PCD547A	PCD545A;	PCD546A Covers all units
XP600WGM	G.M. 6V53	964	35056464	35056472	Covers all units

Model	Driver	Serial Code	Parts Manual	Ops. & Maint. Manual	Comments
XP600AWGM	G.M. 6V53	965	35063940	35068220	For units thru 120486
			35068238	35068220	For units above 120486
XP600BWGM	G.M. 6V53	468	PCD800	PCD800	Covers all units
XP600CWGM	G.M. 6V53	69	PCD866	PCD866	Covers all units
XP600WCU	CUM L10	473	35359512	35359512	For units thru 199837
			35380559	35380559	For units above 199837
XP600AWCU	CUM LT10C	528	35386598	35386598	Covers all units
XHP600SCAT	CAT3306B	476	35390392	35390392	Covers all units
XHP 650WCAT	CAT3306B	521	35376292	35376292	For units thru 194684
			35380542	35380542	For units above 194684
XHP650AWCAT	CAT3306B	538	35393925	35393925	Covers all units
			PCD550		
P700WCU	CUM V504	976	PCD552	PCD549	Covers all units
			PCD549		
P700SCU	CUM V504	975	PCD552	PCD550	Covers all units
			PCD545A		
P700SGM	G.M. 6V53	993	PCD547A	PCD546A	Covers all units
P700WGM	G.M. 6V53	994	35056464	35056472	Covers all units
P700AWGM	G.M. 6V53	977	35063940	35068220	For units thru 120486
			35068238	35068220	For units above 120486
P700BWGM	G.M. 6V53	474	PCD801	PCD801	Covers all units
P700CWGM	G.M. 6V53	475	PCD866	PCD866	Covers all units
P750WCU	CUM L10	482	35359512	35359512	For units thru 199837
			35380559	35380559	For units above 199837
P750WCU-M8034	CUM L10	482	35368679	35368679	Covers all units
P750WCU-M0006	CUM L10	482	35372143	35372135	Covers all units
P750AWCU	CUM LT10C	491	35386598	35386598	Covers all units
HP750WCU	CUM L10	489	35359512	35359512	For units thru 199837
			35380559	35380559	For units above 199837
HP750AWCU	CUM LT10C	495	35386598	35386598	Covers all units
HP750BWCU	CUM LT10C	715	35386952	35386952	Covers all units
HP750CWCU	CUM 6CTA8.3	764	35389915	35389915	Covers all units
HP750WJD	J.D. 6081A	767	35389923	35389923	Covers all units
P750WGM	G.M. DD6-71T	490	35362987	35362987	Covers all units

Model	Driver	Serial Code	Parts Manual	Ops. & Maint. Manual	Comments
XP750WGM	G.M. 6V71	981	35056746	35067214	For units thru 108847
			35067222	35067214	For units above 108847
XP750AWGM	G.M. 6V71	480	PCD804	PCD804	Covers all units
XP750BWGM	G.M. 6V71	481	PCD864	PCD864	Covers all units
XP750BWCU	CUM LT10C	711	35386952	35386952	Covers all units
XP750CWCU	CUM 6CTA8.3	710	35389915	35389915	Covers all units
XP750WJD	J.D. 6076A	706	35389923	35389923	Covers all units
VHP750WCAT	CAT 3306	734	35393438	35393438	Covers all units
VHP750AWCAT	CAT 3306	053	54579032	54579032	
VHP750WCU	CUM M11	050	54579040	54579040	
XHP750SCU	CUM V903	978	PCD853	PCD853	Covers all units
XHP750-200-OF	G.M. 6V92T	622	PCD862	PCD862	Covers all units
XHP750SGM	G.M. 6V92T	980	35062256	35067610	For units thru 118169
			PCD852	PCD852	For units above 118169
HP750SCAT	CAT3306B	971	35366004	35366004	Covers all units
XHP750WCAT	CAT 3306B	530	35376292	35376292	For units thru 194684
			35380542	35380542	For units above 194684
XHP750AWCAT	CAT 3306B	537	35393925	35393925	Covers all units
XHP750WGM	G.M. 6V92T	979	35067644	35067636	Covers all units
XHP750AWGM	G.M. 6V92T	484	PCD811	PCD811	Covers all units
XHP750BWGM	G.M. 6V92T	485	PCD836	PCD836	Covers all units
HP825AWCU	CUM LT10C	499	35386598	35386598	Covers all units
HP825BWCU	CUM LT10C	716	35386952	35386952	Covers all units
HP825CWCU	CUM M11-C	721	35391762	35391762	Covers all units
HP825DWCU	CUM M11	722	35393560	35393560	Covers all units
VHP825WCU	CUM M11	707	35393560	35393560	Covers all units
XP825WCU	CUM L10	497	35359512	35359512	For units thru 199837
			35380559	35380559	For units above 199837
XP825AWCU	CUM LT10C	498	35386598	35386598	Covers all units
XP825BWCU	CUM LT10C	713	35386952	35386952	Covers all units
XP825CWCU	CUM 6CTA8.3	763	35389915	35389915	Covers all units
XP825WJD	J.D. 6081A	766	35389923	35389923	Covers all units
XHP825WCAT	CAT 3306B	531	35380542	35380542	Covers all units
XHP825AWCAT	CAT 3306B	541	35393925	35393925	Covers all units
P850WGM	G.M. 6V71	982	35056746	35067214	For units thru 108847
			35067222	35067214	For units above 108847

Model	Driver	Serial Code	Parts Manual	Ops. & Maint. Manual	Comments
P850AWGM	G.M. 6V71	487	PCD804	PCD804	Covers all units
P850BWGM	G.M. 6V71	488	PCD864	PCD864	Covers all units
HP850WGM	G.M. 6V92T	983	35056977	35068444	For units thru 109484
			35068451	35068444	For units above 109484
HP850AWGM	G.M. 6V92T	493	PCD805	PCD805	Covers all units
HP850BWGM	G.M. 6V92T	494	PCD833	PCD833	For units thru 128735
			PCD867	PCD867	For units above 128735
VHP850WCAT	CAT 3306	735	35393438	35393438	Covers all units
VHP850AWCAT	CAT 3306	054	54579032	54579032	
P900WCU	CUM L10	580	35359512	35359512	For units thru 199837
			35380559	35380559	For units above 199837
P900AWCU	CUM LT10C	579	35386598	35386598	Covers all units
P900BWCUC	CUM LT10C	714	35386952	35386952	Covers all units
XP900WGM	G.M. 6V92T	985	35056910	35068428	For units thru 109484
			35068436	35068428	For units above 10948
XP900AWGM	G.M. 6V92T	573	PCD806	PCD806	Covers all units
XP900BWGM	G.M. 6V92T	574	PCD834	PCD834	For units thru 128735
			PCD867	PCD867	For units above 128735
XP900AWCU	CUM LT10C	568	35386598	35386598	Covers all units
XP900BWCUC	CUM LT10C	717	35386952	35386952	Covers all units
XP900CWCUC	CUM M11-C	718	35391762	35391762	Covers all units
XP900DWCUC	CUM M11	724	35393560	35393560	Covers all units
HP900WCAT	CAT3306	736	35393438	35393438	Covers all units
HP900AWCAT	CAT 3306	055	54579032	54579032	
XHP900SCAT	CAT3406C	569	35386739	35386739	Covers all units
XHP900WCAT-EEC	CAT3406B	572	35380542	35380542	Covers all units
XHP900AWCAT-EEC	CAT3406C	587	35393925	35393925	Covers all units
XHP900WCAT	CAT3406B	578	35377647	35377647	For units thru 194684
			35380542	35380542	For units above 194684
XHP900AWCAT	CAT3406C	584	35393925	35393925	Covers all units
XHP900/350-OF	CAT3406B	702	35360825	35360825	Covers all units
XHP900/350-OF-DD	G.M. 12V71N	633	PCD863	PCD863	Covers all units
HP915WCU	CUM M11	051	54579040	54579040	
HP935WCU	CUM M11	708	35393560	35393560	Covers all units

Model	Driver	Serial Code	Parts Manual	Ops. & Maint. Manual	Comments
XHP950-OF-CAT-DD	CAT3412DIT	626	PCD701	PCD701	Covers all units
XHP950-OF-GM-DD	G.M. 12V71N	636	PCD697	PCD697	Covers all units
XHP950A-OF-GM-DD	G.M. 12V92N	619	PCD826	PCD826	Covers all units
XHP1050-OF-CAT-DD	CAT3412DIT	625	PCD702	PCD702	Covers all units
XHP1050-OF-GM-DD	G.M. 12V71N	635	PCD696	PCD696	Covers all units
XHP1050A-OF-GM-DD	G.M. 12V92N	618	PCD826	PCD826	Covers all units
HP1000WCU	CUM L10	581	35377043	35377043	Covers all units
HP1000AWCU	CUM NTA855	583	35380096	35380096	Covers all units
HP1000BWCU	CUM NTA855	676	35386994	35386994	Covers all units
HP1000CWCU	CUM NTA14-C	673	35393933	35393933	Covers all units
XP1000WCAT	CAT 3306	737	35393438	35393438	Covers all units
XP1000AWCAT	CAT 3306	056	54579032	54579032	
XP1000WCU	CUM M11	052	54579040	54579040	
XP1050WCU	CUM M11	709	35393560	35393560	Covers all units
XHP1070WCAT	CAT 3406	588	35391903	35391903	Covers all units
XHP1070AWCAT	CAT 3406E	077	22087159	22087159	
XHP1070SCAT	CAT 3406	592	N/A	N/A	
P1100WGM	G.M. 6V92T	986	35056910	35068428	For units thru 109484
			35068436	35068428	For units above 109484
P1100AWGM	G.M. 6V92T	585	PCD807	PCD807	Covers all units
P1100BWGM	G.M. 6V92T	586	PCD835	PCD835	For units thru 128735
			PCD867	PCD867	For units above 128735
XHP1150-OF-CAT-AT	CAT3412DIT	645	PCD698	PCD698	For units thru 128193
			PCD698A	PCD698A	For units above 128193
XHP1150-OF-CAT-DD	CAT3412DIT	624	PCD703	PCD703	For units thru 126249
			PCD703A	PCD703A	For units above 126249
XHP1150-OF-CAT-IRCS	CAT3412DIT	647	PCD727	PCD727	Covers all units
XHP1150-OF-GM-DD	G.M. 12V71N	634	PCD693	PCD693	Covers all units
XHP1150A-OF-GM-DD	G.M. 12V92N	617	PCD826	PCD826	Covers all units
XHP1150-OF-GM-AT	G.M. 12V71N	643	PCD691	PCD691	Covers all units
XHP1150A-OF-GM-AT	G.M. 12V92N	616	PCD825	PCD825	Covers all units
XHP1170WCAT	CAT 3406E	078	22087159	22087159	
XHP1170WCU	CUM QSX15	079	22063556	22063556	
XP1200WCU	CUM L10	657	35377043	35377043	Covers all units
XP1200AWCU	CUM NTA855	658	35380096	35380096	Covers all units
XP1200BWCU	CUM NTA855	675	35386994	35386994	Covers all units
XP1200CWCU	CUM NTA14-C	674	35393933	35393933	Covers all units

Model	Driver	Serial Code	Parts Manual	Ops. & Maint. Manual	Comments
NXP1300WCU	CUM NTA855	661		35386572	
NXP1300AWCU	CUM NTA855	669		35387018	For units thru 260272
	CUM NTA14-C	669		35387018	For units thru 260272
P1300AWCU	CUM NTA855	668	35380096	35380096	Covers all units
P1300BWCUCU	CUM NTA855	677	35386994	35386994	Covers all units
P1300CWCUCU	CUM NTA14-C	678	35393933	35393933	Covers all units
HP1300WGM	G.M. 8V92T	987	35057066	35067032	For units thru 111906
			35067040	35067032	For units above 111906
HP1300AWGM	G.M. 8V92T	589	PCD808	PCD808	For units thru 144268
			PCD809	PCD809	For units above 144268
HP1300BWGM	G.M. 8V92TA	590	35366145	35366145	Covers all units
HP1300WCU	CUM NTA855	660	35376086	35376086	Covers all units
HP1300AWCU	CUM NTA855	695	35386994	35386994	Covers all units
HP1300BWCUCU	CUM NTA-14C	729	35393933	35393933	Covers all units
HP1300CWCUCU	CUM QSX15	075	54757919	54757919	
XP1400WGM	G.M. 8V92T	988	35057009	35067016	For units thru 111906
			35067024	35067016	For units above 111906
XP1400AWGM	G.M.8V92T	593	PCD809	PCD809	Covers all units
XP1400BWGM	G.M. 8V92TA	594	35366145	35366145	Covers all units
XP1400WCU	CUM NTA855	680	35376086	35376086	Covers all units
XP1400AWCU	CUM NTA855	694	35386994	35386994	Covers all units
XP1400BWCUCU	CUM NTA-14C	696	35393933	35393933	Covers all units
NHP1500WCU	CUM QSX15	681	54665302	54665302	
NHP1500SCU	CUM QSX15	682	N/A	N/A	
P1600WGM	G.M. 8V92T	989	35057009	35067016	For units thru 112149
			35067024 35067016	For units above 112149	
P1600AWGM	G.M. 8V92T	597	PCD810	PCD810	For units thru 144268
			PCD809	PCD809	For units above 144268
P1600BWGM	G.M. 8V92TA	598	35366145	35366145	Covers all units
P1600WCU	CUM NTA855	984	35376086	35376086	Covers all units
P1600AWCU	CUM NTA855	693	35386994	35386994	Covers all units
P1600BWCUCU	CUM NTA-14C	692	35393933	35393933	Covers all units
HP1600CWCUCU	CUM QSX15	076	54757919	54757919	
XHP1900-OF-CAT-DD	CAT 3412DIT	629	PCD701	PCD701	Covers all units

Model	Driver	Serial Code	Parts Manual	Ops. & Maint. Manual	Comments
XHP1900-OF-GM-DD	G.M. 12V71N	639	PCD697	PCD697	Covers all units
XHP1900A-OF-GM-DD	G.M. 12V92N	615	N/A	N/A	
XHP2100-OF-CAT-DD	CAT3412DIT	628	PCD702	PCD702	Covers all units
XHP2100-OF-GM-DD	G.M. 12V71N	638	PCD696	PCD696	Covers all units
XHP2100A-OF-GM-DD	G.M. 12V92N	614	N/A	N/A	
XHP2300-OF-CAT-AT	CAT3412DIT	646	PCD698	PCD698	Covers all units
XHP2300-OF-CAT-DD	CAT3412DIT	627	PCD703	PCD703	Covers all units
P600WIR	6IRF8TE	278	22199590	22199590	*22235428
HP450WIR	6IRF8TE	279	22199590	22199590	*22235428
VHP400WIR	6IRF8TE	289	22199590	22199590	*22235428
XHP650BWCAT EXPORT CAT	E282 3306TA	445	35393925	35393925	
XHP750BWCAT EXPORT	CAT E282 3306TA	446	35393925	35393925	
XHP825BWCAT EXPORT	CAT E282 3306TA	448	35393925	35393925	
XHP900BWCAT EXPORT	CAT E472 3406DITA	449	22464937	22464937	
XHP1250CM @1800RPM	EXTERNAL	732	43214683	43214683	
P110AWIR	4IRH8N-1	759	22035585	22035585	
P135AWIR	4IRH8N-1	762	22035585	22035585	
P185AWIR	4IRI8N	820	22305593	22305593	
XP185AWIR	4IRI8T	821	22442842	22442560	
SHP825WCAT	CAT E609 C-9	843	22326730	22258057	*22373294
VHP750BWCAT	CAT E609 C-9	844	22326730	22258057	*22373294
MHP825WCAT	CAT E609 C-9	845	22326730	22258057	*22373294
VHP110AWJDU	J.D. 3029D	849	35393065	35393065	
USMC P260WIR	MIL24V 4IRJ7T	004	22138960	22138960	
VHP90CMH	Hyd. Motor	009	22189203	22189203	
XP375AWJD	J.D. 4045TF	047	54722160	54722160	
XP375AWIR	4IRD5AE	080	22220321	22220321	*22235428
P425AWIR	4IRD5AE	081	22220321	22220321	*22235428
HP375AWIR	4IRD5AE	085	22220321	22220321	*22235428
VHP300AWIR	4IRD5AE	086	22220321	22220321	*22235428
XP1060WCU	CUM QSL-9	258	22326722	22258040	*22235576
HP935AWCU	CUM QSL-9	259	22326722	22258040	*22235576
MHP825WCU	CUM QSL-9	262	22326722	22258040	*22235576
VHP750WCU	CUM M11	265	54579040	54579040	*22235576
XHP750WCU	CUM QSL-9	271	22326722	22258040	*22235576
XHP750CWCAT	CAT E609 C-9	272	22326730	22258057	*22373294
XHP1070BWCAT EXPORT	CAT 3406 TA	456	35391903	35391903	
XHP900ASCATSKID EXPORT	CAT 3406 B	556	35386739	35386739	
XHP1170SCAT	CAT C-15	596	22155816	22155816	*22144950

Model	Driver	Serial Code	Parts Manual	Ops. & Maint. Manual	Comments
XHP1250CMH @1800RPM	Hyd. Motor	733	22077473	22077473	
XHP1250CM @2100RPM	EXTERNAL	738	22077473	22077473	
XHP1250CMH @2100RPM	Hyd. Motor	739	22077473	22077473	
HP675DWCU	CUM 6C8.3	A15	22482533	22482517	
XP750DWCU	CUM 6C8.3	A16	22482533	22482517	
HP750DWCU	CUM 6C8.3	A17	22482533	22482517	
XP825DWCU	CUM 6C8.3	A18	22482533	22482517	
XP950HACAT	CAT C-9	A19	22560841	22258057	*22373294
XP1060HACAT	CAT C-9	A20	22560841	22258057	*22373294
P250WJDU	J.D. 4045D	A23	22320717	22320717	
P260AWIR	4IRI8T	A24	22442701	22442545	
RHP1070WCAT EXPORT	CAT 3406 TA	A28	35393925	35393925	*35393925
HP1600SCAT	CAT C-15	A38	22395487	22395487	*22144950
P250WJDU W/AUX	J.D. 4045D	A39	22320717	22320717	
XP375BWIR	4IRD5AE	A57	22220321	22220321	*22235428
P425BWIR	4IRD5AE	A58	22220321	22220321	*22235428
HP375BWIR	4IRD5AE	A59	22220321	22220321	*22235428
VHP300BWIR	4IRD5AE	A60	22220321	22220321	*22235428
HP450AWIR	6IRF8TE	A61	22442628	22442594	*22235428
VHP400AWIR	6IRF8TE	A62	22442628	22442594	*22235428
VHP30RMH	OPEN EXTERNAL	A63	22430508	22430508	
VHP30RMH	CLOSED EXTERNAL	A64	22430508	22430508	
VHP40RMH	OPEN EXTERNAL	A65	22430508	22430508	
VHP40RMH	CLOSED EXTERNAL	A66	22430508	22430508	
LIGHTSOURCE NAVY 6KW	KUB D1105BG	A90	22474050	22474043	
XHP1070SCAT TIER 2	CAT C-15	A93	22155816	22155816	*22144950
HP60CMH	EXTERNAL	A94	22189203	22189203	
P160BWIR (AirSource)	4IRX3N	B01	22496964	22498711	
P185BWIR (AirSource Plus)	4IRX3T	B02	22546980	22498711	
P185FWJD (AirSource Plus)	J.D. 4024T	B10	22496970 22498745	*22498760	
HP375WCU	CUM 4B3.9TAA	B11	22592075	22592086	
XP375WCU	CUM 4B3.9TAA	B12	22592075	22592086	
P425WCU	CUM 4B3.9TAA	B13	22592075	22592086	
VHP750CWCU RE-RATE	QSL-9	B22	22560866	22560858	*22235576

Model	Driver	Serial Code	Parts Manual	Ops. & Maint. Manual	Comments
MHP825BWCU RE-RATE	QSL-9	B23	22560866	22560858	*22235576
HP915AWCU RE-RATE	QSL-9	B24	22560866	22560858	*22235576
XP1000AWCU RE-RATE	QSL-9	B25	22560866	22560858	*22235576
SHP750WCU RE-RATE	QSL-9	B27	22560866	22560858	*22235576
XHP750WCU EXPORT		B33	22560874	22258040	*22235576
XHP1170AWCAT (TIER3)	CAT C15	B40	22481907	22481881	*22144950
XHP1070CWCAT (TIER3)	CAT C15	B41	22481907	22481881	*22144950
XHP1170ASCAT (TIER3)	CAT C15	B42	22144950		
XHP1070BSCAT (TIER3)	CAT C15	B43	22155816	22155816	*22144950
XHP1170AWCU	QSL15	B44		22063556	*22109441
XHP1170BWCAT EXPORT	CAT C15	B45	22481907	22481881	*22144950
XHP1070DWCAT EXPORT	CAT C16	B46	22481907	22481881	*22144950
XHP1170BSCAT EXPORT		B47		22144950	
XHP1070CSCAT EXPORT		B48	22155816	22155816	*22144950
HP1600ASCAT EXPORT		B49	22155816	22155816	*22144950
P260AWIR MIL 24VOLT		B65			
VHP750DWCU	QSL 300Hp	B69	22560866	22560858	*22235576
MHP825CWCU	QSL 300Hp	B70	22560866	22560858	*22235576
HP915BWCU	QSL 300Hp	B71	22560866	22560858	*22235576
XP1000BWCU	QSL 300Hp	B72	22560866	22560858	*22235576
P185GWJD RE-RATE	J.D. 4024	B73	22591986	22591978	
HP675EWCU	CUM QSC8.3	B74	22826218	22834568	*22893804
XP750EWCU	CUM QSC8.4	B75	22826218	22834568	*22893804
HP750EWCU	CUM QSC8.5	B76	22826218	22834568	*22893804
XP825EWCU	CUM QSC8.6	B77	22826218	22834568	*22893804
XHP1170FrameCAT	CAT C15	B78			*22144950
HP1600EWCU	QSL15	B83	22523831	22523815	*22772784
HP1300EWCU	QSL15	B84	22523831	22523815	*22772784
VHP750EWCAT	CAT C-9	B97	22560833	22560825	*22373294
MHP825CWCAT	CAT C-9	B98	22560833	22560825	*22373294
VHP750BWCAT	CAT C-9	C03	22326730	22258057	*22373294
MHP825WCAT	CAT C-9	C04	22326730	22258057	*22373294

Model	Driver	Serial Code	Parts Manual	Ops. & Maint. Manual	Comments
XP950WCAT	CAT C-9	C05	22326730	22258057	*22373294
P1060WCAT	CAT C-9	C06	22326730	22258057	*22373294
HP675FWCU	CUM 6C8.3	C07	22482533	22482517	
XP750FWCU	CUM 6C8.3	C08	22482533	22482517	
HP750FWCU	CUM 6C8.3	C09	22482533	22482517	
XP825FWCU	CUM 6C8.3	C10	22482533	22482517	
XHP2300-OF-GM-DD	G.M. 12V71N	637	PCD693	PCD693	Covers all units
XHP2300A-OF-GM-DD	G.M. 12V92N	613	N/A	N/A	
XHP2300-OF-GM-AT	G.M. 12V71N	644	PCD691	PCD691	Covers all units
XHP2300A-OF-GM-AT	G.M.12V92N	612	N/A	N/A	

Notes:

- ◇ If an 8 digit part number is not listed, the listed number can be entered into the customer part number field on Smart Equip to cross to the 8 digit Doosan part number
- ◇ For S/N's 351086 or higher utilize manual number 22496913
- ◇ * Electronic service manual

COMPRESSOR MANUALS

Model	Driver	Serial Code	Parts Manual	Operation Manual
XHP700AWCU	CU 299HP	B79	22560866	22560858
SHP750WCU	CU 299HP	B80	22560866	22560858
SHP750A W CAT	CAT C-9 300HP	B95	22560833	22560825
XHP700A W CAT	CAT C-9 300HP	B96	22560833	22560825
XHP750C W CAT	CAT C-9 335HP	C01	22326730	22258057
SHP825 W CAT	CAT C-9 335HP	C02	22326730	22258057
XHP750WCAT-T3	CAT C-9 350 HP T3	C44	22846513	22846471
P425WJD-T3	4045HF 285 24V	C46	23209257	23209307
HP375CWIR	4045HF 285 24V	C47	23209257	23209307
XP375WJD-T3	4045HF 285 24V	C48	23209257	23209307
P600WJD-T3	6068HF285 24V	C54	23209265	23252059
HP450WJD-T3	6068HF285 24V	C55	23209265	23252059
VHP400WJD-T3	6068HF285 24V	C56	23209265	23252059
MHP825WCU-T3	CU 300HP T3	C59	22846505	22846430
HP915WCU-T3	CU 300HP T3	C60	22846505	22846430
XP1000WCU-T3	CU 300HP T3	C61	22846505	22846430
XP375BWIR	4045HF 275 24V	C71	22557888	22442578
P425BWIR	4045HF 275 24V	C72	22557888	22442578
HP375BWIR	4045HF 275 24V	C73	22557888	22442578
VHP300BWIR	4045HF 275 24V	C74	22557888	22442578
XP375BWIR	4045HF 275 24V	C75	22557888	22442578

Model	Driver	Serial Code	Parts Manual	Operation Manual
P425BWIR	4045HF 275 24V	C76	22557888	22442578
HP375BWIR	4045HF 275 24V	C77	22557888	22442578
VHP300BWIR	4045HF 275 24V	C78	22557888	22442578
P600AWIR	JD 6068TF275 TIER 2	C79	22557896	22442596
HP450AWIR	JD 6068TF275 TIER 2	C80	22557896	22442596
VHP400AWIR	JD 6068TF275 TIER 2	C81	22557896	22442596
P600WIR-FLEX	JD 6068TF275 TIER 2	C82	22557896	22442596
HP450WIR-T2-FLEX	JD 6068TF275 TIER 2	C83	22557896	22442596
VHP400WIR-T2-FLEX	JD 6068TF275 TIER 2	C84	22557896	22442596
P600AWIR	JD 6068TF275 TIER 2	C85	22557896	22442596
HP450AWIR	JD 6068TF275 TIER 2	C86	22557896	22442596
VHP400AWIR	JD 6068TF275 TIER 2	C87	22557896	22442596
XHP1170FCATS-T3	CAT 525HP TIER 3	C97	23063852	22878086
XP375BWIR	4045HF 275 24V	C99	22557888	22442578
P425BWIR	JD 4045HF275 TIER2	D01	22557888	22442578
HP375BWIR	JD 4045HF275 TIER2	D02	22557888	22442578
VHP300BWIR	JD 4045HF275 TIER2	D03	22557888	22442578
P185WIR-FLEX	4IRI8N FLEX	D07	22591986	22498760
P185WJD-CP	JD-4024TF270	D08	22591986	22498760
P185FWJD ABT AIRSOURCE	JD 4024T AB&T	D09	22591986	22498760
P135WIR-T4I	IR 4IRH8N-1	D10	23267024	22442552
P185WJDR-T4I	JD 4024TF281 T4I	D11	22591986	22498760
AIRSOURCE P160BWIR TIER 4I		D12	22546964	22498711
P260WIR-T3	4IRI8TE TIER 3	D13	23294663	23294671
XP185WIR-T3	4IRI8TE TIER 3	D14	23294648	23294655
XP375WCU-T2	CU 4B 3.9TAA	D44	22592075	22592083
P425WCU-T2	4B 3.9TAA	D45	22592075	22592083
HP375WCU-T2	ENGINE 4B 3.9TAA	D46	22592075	22592083
P90WIRU-T4I	FAN 7/31 E7/31 E	D50	22695910	
HP375WJD-T3	4045HF 285 24V	D54	23209257	23209307
XXHP1270FCAT-T3	CAT C18 700HP	D58	46499240	46499257
XHP1170-F-CAT TIER 3 C18 ENGINE	CAT C-18 575 HP	D65	46492849	35386606
AIRSOURCE+JD-T4I	JD 4024T	D68	22496970	22498745
P185WJD-T4I	4024TF281	D75	46490686	46490694
P185WYM-T4I	4TNV84T-BMIR	D76	46553433	46553434
C185WKUB-T2	4IRX3N	D80	46551818	46551819
P250WJD-T3	4045TF280	D81	46553448	46553449
P260/HP220WYM-T3	4TNV98T-ZNIR TIER 3	D82	46491866	46553446
XHP1170CM-1800		D85	43214683	43214683
XHP1070WCAT-ML-T3	CAT C15 TIER 3	D86	46545497	46545489

Model	Driver	Serial Code	Parts Manual	Operation Manual
XHP750WCAT-ML-T3	CAT C-9 350 HP T3	D93	46551882	46551884
P185WJDU-T4I	JD 4024TF281	D99	46554166	46554167
C185WKUB-T2	2403T KUBOTA	E04	46555711	46555713
HP1600WCU-FX-T3	CU QSX15-C600 560HP TIER 3, FLEX	E09	22523831	22523815
HP1600WCU-T3	CU QSX15-C600 560HP TIER 3	E10	22523831	22523815
XHP1170FCATS-FX-T3	CAT C-15 540HP TIER 3, FLEX	E11	23063852	22878086
XXHP1270FCAT-FX-T3	CAT C-18 700HP TIER 3, FLEX	E12	46499240	46499257
XXHP1270FCAT-T3	CAT C-18 700HP TIER 3	E13	46499240	46499257
XHP750WCAT-FX-T3	CAT C-9 350HP TIER 3	E14	22846513	22846471
HP915WCU-FX-T3	CU QSL 300HP TIER 3 FLEX	E16	22846505	22846430
MHP825WCU-FX-T3	CU QSL 300HP TIER 3 FLEX	E17	22846505	22846430
XP1000WCU-FX-T3	CU QSL 300HP TIER 3 FLEX	E18	22846505	22846430
HP750WCU-FX-T3	CU QSC 260HP TIER 3 FLEX	E19	22826218	22826226
XP825WCU-FX-T3	CU QSC 260HP TIER 3 FLEX	E20	22826218	22826226
XHP1170WCAT-FX-T3	CAT C-15 540HP TIER 3, FLEX	E21	22742951	22742944
XP750WCU-ML-T3	CU QSC 260HP, ML, TIER 3, FLEX	E33	46567620	46567621
XHP1170WCAT-T3	CAT C-15 540HP TIER 3	E37	22742951	22742944
XHP750-AE-KIT		E40		
XHP900-AE-KIT		E41		
XHP1170 FCAT-S T3-EX	CAT C-15 540HP TIER 3	E42	23063852	22878086
XHP975WCAT-T4I	CAT C-13 T4I	E45	46604940	46604941
HP1300WCAT T4I		E46		
XP825WCU-T4I	CU QSB 6.7L TIER 4-I	E47	46559963	46559964
HP750WCU-T4I	CU QSB 6.7L TIER 4-I	E48	46559963	46559964
XHP1170FCATS-FX-T3	CAT C-18 575 HP TIER 3, FLEX	E92	46492849	35386606
HP1600WCU-T4I	CU QSX15 T4i	E97	46614488	46614489
C185WDZ-T4F	Deutz D2.9 L4 49HP T4F	F23	46651531	46651191
P185WDZ-T4F	Deutz D2.9 L4 49HP T4F	F24	46651531	46651191
VP900eWBAL-VS	Motor 225HP 4 Pole TEFC 460V	F30	46649579	46651363
XP825WCU-T4F	QSB 6.7L T4F	F31	46652079	46652080
HP750WCU-T4F	QSB 6.7L T4F	F32	46652079	46652080

Model	Driver	Serial Code	Parts Manual	Operation Manual
C185KUBG	Kubota WG2503 Gas	F45	46666187	46666645
P185WDO T4F	Doosan D24 T4F	F63	46670940	46670941

SECTION 4

Generators

LEGACY MAINTENANCE KITS

Assorted kits have been developed for a wide range of Generators. The following list provides the contents and part numbers. The kits available below list the quantities of each filter within the assigned kit.

Key:

A= "Filter Change Kit" gives the user one complete change of elements *excluding* separator elements.

B= "Filter Kit" gives the user multiple quantities of all compressor and engine elements *excluding* separator elements.

*= Denotes the quantity of the filters used in the machine.

Model	Kit Part #	Kit Hours	Quantities			Contents	
			A	B	*	Part #	Description
G10A	A 44003929	250	1	1	1	85426815	Fuel Filter
	B 44003937	500	1	1	1	85426849	Oil Filter
				1	1	36890135	Outer Filter
				1	1	54525530	Inner Filter
G11ME	A 36090587		1		1	85426849	Oil Filter
G11A			1		1	85426815	Fuel Filter
			1		1	54480918	Engine Oil
G20	A 36059855		1		1	85400646	Outer Air Filter
			1		1	85400695	Inner Air Filter
			1		1	85426849	Engine Oil Filter
			1		1	85426815	Engine Fuel Filter
G20A	A 36059863		1		1	85400679	Outer Air Filter
G25			1		1	85400703	Inner Air Filter
G25A			1		1	85426856	Engine Oil Filter
			1		1	85426823	Engine Fuel Filter
G25B	A 44003945	250	1	1	1	85426823	Fuel Filter
	B 44003952	500	1	1	1	85426856	Oil Filter
				1	1	35393685	Primary Element
				1	1	54525530	Fuel / Water Element
G40	A 36059871		1		1	85400679	Outer Air Filter
G40A			1		1	85400703	Inner Air Filter
			1		1	85426831	Engine Oil Filter
			1		1	85426823	Engine Fuel Filter
G40B	A 44000404	250	1	1	1	85426823	Fuel Filter
	B 44000412	500	1	1	1	85426831	Oil Filter
				1	1	35393685	Primary Element
				1	1	54525530	Fuel / Water Element
G50	A 36059889		1		1	85400729	Outer Air Filter
G70			1		1	85400778	Inner Air Filter
G80			1		1	36881696	Engine Oil

Model	Kit Part #	Kit Hours	Quantities			Contents	
			A	B	*	Part #	Description
			1		1	85400976	Fuel Filter
G550A	A 36090595		1		1	22206148	Oil Filter
G75A			1		1	36534659	Fuel Filter
			1		1	36875938	Engine Oil
			1		1	54525530	Fuel / Water Filter
					1	85400729	Outer Air Filter (not incl. in kit)
					1	85400778	Inner Air Filter (not incl. in kit)
G60	A 44003960	250	1	1	1	22545867	Oil Filter
	B 44003978	500	1	1	1	22556138	Fuel Filter
				1	1	54471834	Air Cleaner Element
				1	1	54525530	Fuel / Water Element
G80A	A 44003986	250	1	1	1	22545867	Oil Filter
	B 4400394	500	1	1	1	22556138	Fuel Filter
				1	1	54471834	Air Cleaner Element
				1	1	54525530	Fuel / Water Element
G90	A 36059897		1		1	85400752	Outer Air Filter
G115			1		1	85400802	Inner Air Filter
			1		1	36881696	Engine Oil
			1		1	85400976	Engine Fuel Filter
G120	A 36090603		1		1	22206148	Oil Filter
			1		1	22206197	Fuel Filter
			1		1	36875938	Engine Oil
			1		1	22576458	Fuel / Water Filter
					1	85400752	Outer Air Filter (not incl. in kit)
					1	85400802	Inner Air Filter (not incl. in kit)
G125	A 44003986	250	1	1	1	22206148	Oil Filter
	B 44003994	500	1	1	1	22206197	Fuel Filter
				1	1	54471834	Air Cleaner Element
				1	1	54525530	Fuel / Water Element
G145	A 36059905		1		1	85400737	Outer Air Filter
G170			1		1	85400786	Inner Air Filter
G190			1		1	36881696	Engine Oil
			1		1	85400976	Engine Fuel Filter
G145A	A 44016038	250	1	1	1	22206148	Oil Filter
	B 44016046	500	1	1	1	22969257	Fuel Filter
				1	1	22969265	Primary Fuel Filter
				1	1	54717145	Primary Element
				1	1	54717152	Safety Element
G145A	A 36090603		1		1	22206148	Oil Filter
			1		1	22206197	Fuel Filter
			1		1	36875938	Engine Oil

Model	Kit Part #	Kit Hours	Quantities			Contents	
			A	B	*	Part #	Description
			1		1	22576458	Fuel / Water Filter
					1	85400752	Outer Air Filter (not incl. in kit)
					1	85400802	Inner Air Filter (not incl. in kit)
G185	A 44016038	250	1	1	1	22206148	Oil Filter
	B 44016046	500	1	1	1	22969257	Fuel Filter
				1	1	22969265	Primary Fuel Filter
				1	1	54717145	Primary Element
				1	1	54717152	Safety Element
G190A	A 36090611		1		1	22206148	Oil Filter
			1		1	22576474	Fuel Filter
			1		1	54480918	Engine Oil
			1		1	22493795	Fuel / Water Filter
					1	85400737	Outer Air Filter (not incl. in kit)
					1	85400786	Inner Air Filter (not incl. in kit)
G235	A 36059913		1		1	85400737	Outer Air Filter
G260			1		1	85400786	Inner Air Filter
			1		1	85401909	Engine Filter
			1		1	85401917	Engine Bypass Oil Filter
			2		2	85401636	Engine Fuel Filter
			1		1	85502938	Engine Fuel / Water Filter
G235	A 36059954		1		1	85401909	Engine Filter
G260			1		1	85401917	Engine Bypass Oil Filter
			2		2	85401636	Engine Fuel Filter
			1		1	85502938	Engine Fuel / Water Filter
					1	85400737	Outer Air Filter (not incl. in kit)
					1	85400786	Inner Air Filter (not incl. in kit)
G240	A 44016038	250	1	1	1	22206148	Oil Filter
	B 44016053	500	1	1	1	22969257	Fuel Filter
				1	1	22119168	Primary Element
				1	1	22119176	Safety Element
				1	1	22969265	Primary Fuel Filter
G260A	N/A				1	36870038	Oil Filter (Spin-On)
					1	22577423	Fuel Filter
					1	85401339	Outer Air Filter (not incl. in kit)
					1	85401354	Inner Air Filter (not incl. in kit)
G260A	N/A				1	36870038	Oil Filter (Spin-On)
					1	22493878	Fuel Filter

Model	Kit Part #	Kit Hours	Quantities			Contents	
			A	B	*	Part #	Description
					1	36875938	Engine Oil
					1	85401339	Outer Air Filter (not incl. in kit)
					1	85401354	Inner Air Filter (not incl. in kit)
G260A	N/A				1	85628170	Oil Filter (Cartridge)
					1	22577423	Fuel Filter
					1	85401339	Outer Air Filter (not incl. in kit)
					1	85401354	Inner Air Filter (not incl. in kit)
G260A	N/A				1	85628170	Oil Filter (Cartridge)
					1	22493878	Fuel Filter
					1	22576938	Fuel / Water Filter
					1	85401339	Outer Air Filter (not incl. in kit)
					1	85401354	Inner Air Filter (not incl. in kit)
G290	A 44020253	250	1	1	1	22177737	Oil Filter
	B 44020261	500	1	1	1	22765325	Fuel Filter
			1	1	1	36868156	Corrosion Resistor
				1	1	23061666	Fuel / Water Filter
				1	1	89288971	Main Element
				1	1	89288989	Safety Element
G330	N/A				1	36870038	Oil Filter (Spin-On)
					1	22577423	Fuel Filter
					1	85401339	Outer Air Filter (not incl. in kit)
					1	85401354	Inner Air Filter (not incl. in kit)
G330	N/A				1	85628170	Oil Filter (Cartridge)
					1	22577423	Fuel Filter
					1	85401339	Outer Air Filter (not incl. in kit)
					1	85401354	Inner Air Filter (not incl. in kit)
G295	A 36059921		1		1	85401339	Outer Air Filter
G380			1		1	85401354	Inner Air Filter
G405			2		2	85401909	Engine Oil Filter
			2		2	85401636	Engine Fuel Filter
			1		1	85502938	Engine Fuel / Water Filter
G295	A 36059970		2		2	85401909	Oil Filter (Cartridge)
G380			2		2	85401636	Fuel Filter
G405			1		1	85502938	Fuel / Water Filter
					1	85401339	Outer Air Filter (not incl. in kit)

Model	Kit Part #	Kit Hours	Quantities			Contents	
			A	B	*	Part #	Description
					1	85401354	Inner Air Filter (not incl. in kit)
G295	A 36059988		1		1	85401339	Outer Air Filter
G380			1		1	85401354	Inner Air Filter
G405			2		2	85401909	Engine Oil Filter
G450	A 44020279	250	1	1	1	54662028	Oil Filter
	B 44020287	500	1	1	1	54662036	Fuel Filter
			1	1	1	54662051	Coolant Filter
				1	1	22201396	Fuel / Water Filter
				1	1	36864361	Primary Element
				1	1	36864379	Safety Element
G460	A 36094571		1		1	22576995	Oil Bypass Filter
			1		1	22577001	Coolant Filter
			2		2	22576987	Oil Filter
			2		2	22576979	Fuel Filter
			2		2	36875938	Engine Oil
			1		1	22576961	Fuel / Water Filter
					1	85401339	Outer Air Filter (not incl. in kit)
					1	85401354	Inner Air Filter (not incl. in kit)
G330	N/A				1	36870038	Oil Filter (Spin-On)
					1	22493878	Fuel Filter
					1	22576938	Fuel / Water Filter
					1	85401339	Outer Air Filter (not incl. in kit)
					1	85401354	Inner Air Filter (not incl. in kit)
G500	A 36059939		2		2	85400737	Outer Air Filter
			2		2	85400786	Inner Air Filter
			2		2	85401347	Engine Oil Filter
			1		1	85401917	Engine Bypass Oil Filter
			2		2	85401636	Engine Fuel Filter
			1		1	85502938	Engine Fuel / Water Filter
			1		1	85402311	Engine Water Filter
G570	A 44020295	250	1	1	1	54662028	Oil Filter
	B 44020303	500	1	1	1	54662036	Fuel Filter
			1	1	1	54662051	Coolant Filter
				1	1	22201396	Fuel / Water Filter
				1	1	36864361	Primary Element
				1	1	36864379	Safety Element
G600	A 36059939		2		2	85401347	Filter, Oil
			2		2	85401636	Filter, Fuel
			1		1	85401917	Oil Pre-filter
			1		1	85402311	Coolant Filter

Model	Kit Part #	Kit Hours	Quantities			Contents	
			A	B	*	Part #	Description
			1		1	85502938	Fuel / Water Filter
			2		2	85400737	Outer Air Filter
			2		2	85400786	Inner Air Filter
G600A	N/A				1	22576987	Oil Filter
					1	22576995	Oil Pre-Filter
					1	22577001	Coolant Filter
					1	22861710	Fuel Filter
					1	22861702	Fuel / Water Filter
					1	22861744	Air Filter
E Series Generators							
E20WJD	A 35099076		1	1		36876423	Inner Air Filter
E20XWJD	B 35093848		1	4		35308030	Engine Oil Filter
			1	6		35308048	Engine Fuel Filter
			1	6		36845493	In Line Fuel Filter
E30WCU	A 35099084		1	1		36876423	Inner Air Filter
E30XWCU	B 35093830		1	6		35374651	Engine Oil Filter
E38XWCU			1	6		35374669	Filter, Fuel
E50WCU			1	6		35374677	Filter, Secondary Fuel
E50XWCU			1	6		36845493	Filter, Fuel
E63XWCU			1	6		36845493	In Line Fuel Filter
E75WJD	A 36053783		1	1		35393685	Engine Air Filter
	B 35063791		1	4		36881696	Engine Oil Filter
			1	6		36534659	Engine Fuel Filter

MAINTENANCE KITS

Model	Serial Code	Kit Part #	Maintenance Interval	QTY	Consumable Part #	Description
G25WMI-2A-T4I	D61	44003945	250 hrs w/o fluids			
				1	85426823	Filter, Fuel
				1	85426856	Filter, Oil
		44003952	500 hrs w/o fluids			
				1	54525530	Element, Fuel/ Water
				1	35393685	Element, Primary
				1	85426823	Filter, Fuel
				1	85426856	Filter, Oil
G40WMI-2A-T4I	D62	44000404	250 hrs w/o fluids			
				1	85426823	Filter, Fuel
				1	85426831	Filter, Oil

Model	Serial Code	Kit Part #	Maintenance Interval	QTY	Consumable Part #	Description
		44000412	500 hrs w/o fluids			
				1	54525530	Element, Fuel/Water
				1	35393685	Element, Primary
				1	85426823	Filter, Fuel
				1	85426831	Filter, Oil
G145WJD-2A-FX-T3	E22	44016038	250 hrs w/o fluids			
				1	22206148	Element, Oil Filter
				1	22969257	Filter, Fuel
		44016046	500 hrs w/o fluids			
				1	22206148	Element, Oil Filter
				1	54717145	Element, Primary
				1	54717152	Element, Safety
				1	22969257	Filter, Fuel
				1	22969265	Filter, Primary Fuel
G185WJD-2A-FX-T3	E23	44016038	250 hrs w/o fluids			
				1	22206148	Element, Oil Filter
				1	22969257	Filter, Fuel
		44016046	500 hrs w/o fluids			
				1	22206148	Element, Oil Filter
				1	54717145	Element, Primary
				1	54717152	Element, Safety
				1	22969257	Filter, Fuel
				1	22969265	Filter, Primary Fuel
G240WJD-2B-FX-T3	E24	44016038	250 hrs w/o fluids			
				1	22206148	Element, Oil Filter
				1	22969257	Filter, Fuel
		44016053	500 hrs w/o fluids			
				1	22206148	Element, Oil Filter
				1	22119168	Element, Primary
				1	22119176	Element, Safety
				1	22969257	Filter, Fuel
				1	22969265	Filter, Primary Fuel
G240WJD-2C-FX-T3	E25	44016038	250 hrs w/o fluids			
				1	22206148	Element, Oil Filter
				1	22969257	Filter, Fuel
		44016053	500 hrs w/o fluids			

Model	Serial Code	Kit Part #	Maintenance Interval	QTY	Consumable Part #	Description
				1	22206148	Element, Oil Filter
				1	22119168	Element, Primary
				1	22119176	Element, Safety
				1	22969257	Filter, Fuel
				1	22969265	Filter, Primary Fuel
G290WCU-3B-FX-T3	E26	44020253	250 hrs w/o fluids			
				1	22765325	Filter, Fuel
				1	22177737	Filter, Oil
				1	36868156	Res Crsn Wtr
		44020261	500 hrs w/o fluids			
				1	89288971	Element, Main
				1	89288989	Element, Safety
				1	22765325	Filter, Fuel
				1	23061666	Filter, Fuel/Water
				1	22177737	Filter, Oil
				1	36868156	Res Crsn Wtr
G290WCU-3C-FX-T3	E27	44020253	250 hrs w/o fluids			
				1	22765325	Filter, Fuel
				1	22177737	Filter, Oil
				1	36868156	Res Crsn Wtr
		44020261	500 hrs w/o fluids			
				1	89288971	Element, Main
				1	89288989	Element, Safety
				1	22765325	Filter, Fuel
				1	23061666	Filter, Fuel/Water
				1	22177737	Filter, Oil
				1	36868156	Res Crsn Wtr
G450WCU-2B-FX-T3	E28	44020279	250 hrs w/o fluids			
					54662051	Filter, Engine Coolant QSX15
					54662036	Filter, Engine Fuel
					54662028	Filter, Engine Oil
		44020287	500 hrs w/o fluids			
					36864361	Element, Primary Outer
					36864379	Element, Safety Inner
					54662051	Filter, Engine Coolant QSX15
					54662036	Filter, Engine Fuel

Model	Serial Code	Kit Part #	Maintenance Interval	QTY	Consumable Part #	Description
					54662028	Filter, Engine Oil
					22201396	Filter, Fuel/Water Separator
G450WCU-2C-FX-T3	E29	44020279	250 hrs w/o fluids			
					54662051	Filter, Engine Coolant QSX15
					54662036	Filter, Engine Fuel
					54662028	Filter, Engine Oil
		44020287	500 hrs w/o fluids			
					36864361	Element, Primary Outer
					36864379	Element, Safety Inner
					54662051	Filter, Engine Coolant QSX15
					54662036	Filter, Engine Fuel
					54662028	Filter, Engine Oil
					22201396	Filter, Fuel/Water Separator
G570WCU-2B-FX-T3	E30	44020295	250 hrs w/o fluids			
					54662051	Filter, Engine Coolant Qsx15
					54662036	Filter, Engine Fuel
					54662028	Filter, Engine Oil
		44020303	500 hrs w/o fluids			
					36864361	Element, Primary Outer
					36864379	Element, Safety Inner
					54662051	Filter, Engine Coolant QSX15
					54662036	Filter, Engine Fuel
					54662028	Filter, Engine Oil
					22201396	Filter, Fuel/Water Separator
G570WCU-2C-FX-T3	E31	44020295	250 hrs w/o fluids			
					54662051	Filter, Engine Coolant Qsx15
					54662036	Filter, Engine Fuel
					54662028	Filter, Engine Oil
		44020303	500 hrs w/o fluids			

Model	Serial Code	Kit Part #	Maintenance Interval	QTY	Consumable Part #	Description
					36864361	Element, Primary Outer
					36864379	Element, Safety Inner
					54662051	Filter, Engine Coolant QSX15
					54662036	Filter, Engine Fuel
					54662028	Filter, Engine Oil
					22201396	Filter, Fuel/Water Separator
G325WCU-3A-T4I	E44	44020253	250 hrs w/o fluids			
				1	22765325	Filter, Fuel
				1	22177737	Filter, Oil
				1	36868156	Res Crsn Wtr
		44020261	500 hrs w/o fluids			
				1	89288971	Element, Main
				1	89288989	Element, Safety
				1	22765325	Filter, Fuel
				1	23061666	Filter, Fuel/Water
				1	22177737	Filter, Oil
				1	36868156	Res Crsn Wtr
G240WCU-T4I	E51	46589959	250 hrs w/o fluids			
				1	46558720	Filter, Engine Lube Oil
				1	46554959	Filter, Fuel Prefilter w/ Water Separator
				1	46558719	Filter, Fuel Primary
		46589960	500 hrs w/o fluids			
				1	54717145	Element, Primary
				1	54717152	Element, Safety
				1	46558720	Filter, Engine Lube Oil
				1	46554959	Filter, Fuel Prefilter w/ Water Separator
				1	46558719	Filter, Fuel Primary
				1	46570540	Grease
		46589961	2000 hrs w/o fluids			
				1	54717145	Element, Primary
				1	54717152	Element, Safety

Model	Serial Code	Kit Part #	Maintenance Interval	QTY	Consumable Part #	Description
				1	46567299	Filter Element, Crankcase Breather
				1	46558720	Filter, Engine Lube Oil
				1	46554959	Filter, Fuel Prefilter w/ Water Separator
				1	46558719	Filter, Fuel Primary
				1	46570540	Grease
G70WJD-2A-FX-T3	E53	44003986	250 hrs w/o fluids			
				1	22206197	Element, Fuel Filter
				1	22206148	Element, Oil Filter
		44003994	500 hrs w/o fluids			
				1	22206197	Element, Fuel Filter
				1	54525530	Element, Fuel/ Water
				1	22206148	Element, Oil Filter
				1	54471834	Element, Primary Air
G90WJD-2A-FX-T3	E54	44021541	250 hrs w/o fluids			
				1	22206148	Element, Oil Filter
				1	22969257	Filter, Fuel
		44021558	500 hrs w/o fluids			
				1	54471842	Element, A/C Safety
				1	22206148	Element, Oil Filter
				1	54471834	Element, Primary Air
				1	22969257	Filter, Fuel
				1	22969265	Filter, Primary Fuel
G190WCU-3A-T4i	E57	46589959	250 hrs w/o fluids			
				1	46558720	Filter, Engine Lube Oil
				1	46554959	Filter, Fuel Prefilter w/ Water Separator
				1	46558719	Filter, Fuel Primary
		46589960	500 hrs w/o fluids			
				1	54717145	Element, Primary

Model	Serial Code	Kit Part #	Maintenance Interval	QTY	Consumable Part #	Description
				1	54717152	Element, Safety
				1	46558720	Filter, Engine Lube Oil
				1	46554959	Filter, Fuel Prefilter w/ Water Separator
				1	46558719	Filter, Fuel Primary
				1	46570540	Grease
		46589961	2000 hrs w/o fluids			
				1	54717145	Element, Primary
				1	54717152	Element, Safety
				1	46567299	Filter Element, Crankcase Breather
				1	46558720	Filter, Engine Lube Oil
				1	46554959	Filter, Fuel Prefilter w/ Water Separator
				1	46558719	Filter, Fuel Primary
				1	46570540	Grease
G150WCU-3A-T4i	E77	46589959	250 hrs w/o fluids			
				1	46558720	Filter, Engine Lube Oil
				1	46554959	Filter, Fuel Prefilter w/ Water Separator
				1	46558719	Filter, Fuel Primary
		46589960	500 hrs w/o fluids			
				1	54717145	Element, Primary
				1	54717152	Element, Safety
				1	46558720	Filter, Engine Lube Oil
				1	46554959	Filter, Fuel Prefilter w/ Water Separator
				1	46558719	Filter, Fuel Primary
				1	46570540	Grease
		46589961	2000 hrs w/o fluids			
				1	54717145	Element, Primary
				1	54717152	Element, Safety
				1	46567299	Filter Element, Crankcase Breather

Model	Serial Code	Kit Part #	Maintenance Interval	QTY	Consumable Part #	Description
				1	46558720	Filter, Engine Lube Oil
				1	46554959	Filter, Fuel Prefilter w/ Water Separator
				1	46558719	Filter, Fuel Primary
				1	46570540	Grease
G85WCU-3A-T4I	E94	46625039	250 hrs w/o fluids			
				1	46558720	Filter, Engine Lube Oil
				1	46587383	Filter, Fuel Final 4.5L
				1	46554959	Filter, Fuel Prefilter w/ Water Separator
		46625040	500 hrs w/o fluids			
				1	22476683	Decal, Oil and Filter Change
				1	46595499	Filter, Direct Flow Primary
				1	46595500	Filter, Direct Flow Secondary
				1	46558720	Filter, Engine Lube Oil
				1	46587383	Filter, Fuel Final 4.5L
				1	46554959	Filter, Fuel Prefilter w/ Water Separator
		46625041	1000 hrs w/o fluids			
				1	22476683	Decal, Oil and Filter Change
				1	46595859	Filter, Crankcase 4.5 L
				1	46595499	Filter, Direct Flow Primary
				1	46595500	Filter, Direct Flow Secondary
				1	46558720	Filter, Engine Lube Oil
				1	46587383	Filter, Fuel Final 4.5L
				1	46554959	Filter, Fuel Prefilter w/ Water Separator

Model	Serial Code	Kit Part #	Maintenance Interval	QTY	Consumable Part #	Description
G125WCU-3A-T4I	E95	46625039	250 hrs w/o fluids			
				1	46558720	Filter, Engine Lube Oil
				1	46587383	Filter, Fuel Final 4.5L
				1	46554959	Filter, Fuel Prefilter w/ Water Separator
		46625040	500 hrs w/o fluids			
				1	22476683	Decal, Oil and Filter Change
				1	46595499	Filter, Direct Flow Primary
				1	46595500	Filter, Direct Flow Secondary
				1	46558720	Filter, Engine Lube Oil
				1	46587383	Filter, Fuel Final 4.5L
				1	46554959	Filter, Fuel Prefilter w/ Water Separator
		46625041	1000 hrs w/o fluids			
				1	22476683	Decal, Oil and Filter Change
				1	46595859	Filter, Crankcase 4.5 L
				1	46595499	Filter, Direct Flow Primary
				1	46595500	Filter, Direct Flow Secondary
				1	46558720	Filter, Engine Lube Oil
				1	46587383	Filter, Fuel Final 4.5L
				1	46554959	Filter, Fuel Prefilter w/ Water Separator
G70WCU-3A-T4I	E96	46625039	250 hrs w/o fluids			
				1	46558720	Filter, Engine Lube Oil
				1	46587383	Filter, Fuel Final 4.5L

Model	Serial Code	Kit Part #	Maintenance Interval	QTY	Consumable Part #	Description
				1	46554959	Filter, Fuel Prefilter w/ Water Separator
		46625040	500 hrs w/o fluids			
				1	22476683	Decal, Oil and Filter Change
				1	46595499	Filter, Direct Flow Primary
				1	46595500	Filter, Direct Flow Secondary
				1	46558720	Filter, Engine Lube Oil
				1	46587383	Filter, Fuel Final 4.5L
				1	46554959	Filter, Fuel Prefilter w/ Water Separator
		46625041	1000 hrs w/o fluids			
				1	22476683	Decal, Oil and Filter Change
				1	46595859	Filter, Crankcase 4.5 L
				1	46595499	Filter, Direct Flow Primary
				1	46595500	Filter, Direct Flow Secondary
				1	46558720	Filter, Engine Lube Oil
				1	46587383	Filter, Fuel Final 4.5L
				1	46554959	Filter, Fuel Prefilter w/ Water Separator

LEGACY OIL COOLER/RADIATOR LIST

Model	Cooler	Radiator
E20WJD	None	35312164
E20XWJD	None	35312164
E30WCU	None	35312164
E30XWCU	None	35312164
E38XWCU	None	35312164
E50WCU	None	35312164
E50XWCU	None	35312164
E63XWCU	None	35312164
E75WJD	None	36877280
E100WJD	None	36877280
E125WJD	None	36877280
E165WJD	None	36877280
G20	None	85426054
G25	None	85400067
G40	None	85400034
G50	None	85403285
G70	None	85403293
G80	None	85403293
G90	None	85403293
G115	None	85403301
G145	None	85403319
G170	None	85403327
G190	None	85403327
G235	None	85423333
G260	None	85425825
G295	None	85425825
G380	None	85425692
G405	None	85425692
G500	None	85425692
G575	None	85425619

OIL COOLER/RADIATOR LIST

Model	Serial Code	Cooler	Radiator
G40WMI-2A-T2	B50		22803332
NOVA G80	B51		22430813
G7HE "A"	B58		N/A
BG7HE "A"	B59		N/A
NOVA G125	B61	36115251	54738927
G330A	B99	N/A	85629434

Model	Serial Code	Cooler	Radiator
G90WJD-2A-T3	C24	36140426	22285464
G145WJD-2A-T3	C27	22880074	22285464
G185WJD-2A-T3	C28	23019961	22939466
G240WJD-2B-T3	C31	22675292	22939466
NOVA G315 60HZ	C32	22758551	22779755
G450WCU-2B-T2	C34	N/A	23035629
G570WCU-2B-T2	C37	N/A	23035629
G290WCU-3B-T3	C38	22758551	22779755
NOVA G340 60HZ	C40	N/A	23035629
G80A 2007 CREDIT PERMITTED SUPER STD	C90	N/A	22430813
G125 2007 CREDIT PERMITTED SUPER STD	C91	N/A	54738927
G80A 2007 FLEX SUPER STD	C92	N/A	22400813
G125 2007 FLEX SUPER STD	C93	N/A	54738927
G10WMI-T2	D60	N/A	22662357
G25WMI-2A-T4I	D61	N/A	22545103
G40WMI-2A-T4I	D62	N/A	22578496
G70WJD-2A-T3	D63	N/A	23263395
G290WCU-3C-T3	D77	22758551	22779755
G570WCU-2C-T2	D78	23035611	23035629
G450WCU-2C-T2	D96	23035611	23035629
G240WJD-2C-T3	D97	22675292	22939466
G145WJD-2A-FX-T3	E22	22880074	22285464
G185WJD-2A-FX-T3	E23	N/A	N/A
G240WJD-2B-FX-T3	E24	N/A	N/A
G240WJD-2C-FX-T3	E25	N/A	N/A
G290WCU-3B-FX-T3	E26	22758551	22779755
G290WCU-3C-FX-T3	E27	22758551	22779755
G450WCU-2B-FX-T3	E28	23035611	23035629
G450WCU-2C-FX-T3	E29	23035611	23035629
G570WCU-2B-FX-T3	E30	23035611	23035629
G570WCU-2C-FX-T3	E31	23035611	23035629
G325WCU-3A-T4I	E44	46554706	46554705
G240WCU-T4I	E51	46554060	46554059
G190WCU-3A-T4i	E57	46554060	46554059

E-SERIES GENERATOR MANUALS

Model	Driver	Style	Serial Code	Parts Manual	Ops. & Maint. Comments
E20WJD	J.D. 3179D	Kohler	803	35373224	Covers all units
E20XWJD	J.D. 3179D	Kohler	809	35380005	Covers all units
G20XWJD	J.D. 3179D	Kohler	804	35380039	Covers all units
E30WCU	CUM 4B3.9	Kohler	802	35373232	Covers all units
E30XWCU/ E38XWCU	CUM 4B3.9	Kohler	810	35380013	For units thru 267817
				35390277	For units above 267817
G30XWCU	CUM 4B3.9	Kohler	805	35380047	Covers all units
G45XWCU	CUM 4BT3.9	Kohler	806	35380054	Covers all units
E50WCU	CUM 4BT3.9	Kohler	801	35373240	Covers all units
E50XWCU/ E63XWCU	CUM 4BT3.9	Kohler	811	35380021	For units thru 284847
				35393396	For units above 284847
E75WJD	J.D.4045T	I-R	783	54370077	Covers all units
E100WJD	J.D.6068T	I-R	785	54370077	Covers all units
E125WJD	J.D.6068T	I-R	787	54370077	Covers all units
E165WJD	J.D.6081A	I-R	775	54370077	Covers all units
E2500H	Honda GX140	T-J	790	35380310	Covers all units
E3000H	Honda GX160	T-J	796	35380476	For units thru 225000



Model	Serial Code	Part #	Description
G3.5, G5, G7VE		22146591	Parts/OPS/Maint.
G5H, G7H		22256432	Parts/OPS/Maint.
G10VE		22146609	Parts/OPS/Maint.
G10		22846570	Parts
G10		22637300	OPS/Maint.
G11		22185581	Parts/OPS/Maint.
G11A		22459440	Parts/OPS/Maint.
G20		22083455	Parts/OPS/Maint.
G20A		22459457	Parts/OPS/Maint.
G25		22091706	Parts/OPS/Maint.
G25A		22459465	Parts/OPS/Maint.
G25B		22637318	Parts
G25B		22637300	OPS/Maint.
G40		22092696	Parts/OPS/Maint.
G40A		22459481	Parts/OPS/Maint.
G40B		22636807	Parts
G40B		22637300	OPS/Maint.
G50		22097257	Parts/OPS/Maint.
G50A		22459507	Parts/OPS/Maint.
G60		22636831	Parts
G60		22637300	OPS/Maint.
G70		22102453	Parts/OPS/Maint.
G75		22459515	Parts/OPS/Maint.
G80		22102461	Parts/OPS/Maint.
G80A		22636864	Parts
G80A		22637300	OPS/Maint.
G90		22102479	Parts/OPS/Maint.
G115		22102487	Parts/OPS/Maint.
G120		22459523	Parts/OPS/Maint.
G125		22637359	Parts
G125		22637300	OPS/Maint.
G145		22102495	Parts/OPS/Maint.
G145A		22459531	Parts/OPS/Maint.
G170		22102503	Parts/OPS/Maint.
G190		22102511	Parts/OPS/Maint.
G190A		22459549	Parts/OPS/Maint.
G235		22102529	Parts/OPS/Maint.
G260		22102537	Parts/OPS/Maint.
G260A		22459556	Parts/OPS/Maint.
G295		22102545	Parts/OPS/Maint.
G330		22459564	Parts/OPS/Maint.
G380		22102552	Parts/OPS/Maint.

Model	Serial Code	Part #	Description
G405		22102560	Parts/OPS/Maint.
G460		22459572	Parts/OPS/Maint.
G500		22102578	Parts/OPS/Maint.
G575		22102586	Parts/OPS/Maint.
G600		22459580	Parts/OPS/Maint.

GENERATOR MANUALS

Model	Driver	Serial Code	Parts Manual	Operation Manual
G40WMI-2A-T2	S4S-Y262IR MITS	B50	22636807	22637300
NOVA G80	JD 4045TF275	B51	22636864	22637300
G7HE "A"	HONDA GX390	B58	22256432	N/A
BG7HE "A"	HONDA GX390	B59	22256432	N/A
NOVA G125	JD SKELETON	B61	22637359	22637300
G330A	JD 6090HF485 TIER 3	B99	22459564	22459564
G90WJD-2A-T3	4045HF285	C24	23087836	22637300
G145WJD-2A-T3	4045HF485	C27	23071459	22637300
G185WJD-2A-T3		C28	22983407	22637300
G240WJD-2B-T3	JD 6068HF485	C31	22938419	22637300
G450WCU-2B-T2	QSX15-G9 NR2	C34	23047533	22637300
G570WCU-2B-T2	QSX15-G9 NR2	C37	23006661	22637300
G290WCU-3B-T3	QSL9-G3 NR3	C38	23060676	22637300
G80A 2007 CREDIT PERMITTED SUPER STD	JD 4045TF275	C90	22636864	22637300
G125 2007 CREDIT PERMITTED SUPER STD	JD 6068TF275	C91	22637359	22637300
G80A 2007 FLEX SUPER STD	JD 4045TF275	C92	22636864	22637300
G125 2007 FLEX SUPER STD	JD 6068TF275	C93	22637359	22637300
G10WMI-T2	MI S3L	D60	22846570	22637300
G25WMI-2A-T4I	G25	D61	22637318	22637300
G40WMI-2A-T4I	MI S4S-Y362IR, T4	D62	22636807	22637300
G70WJD-2A-T3	JD 4045TF285E, T3	D63	23332570	
G290WCU-3C-T3	QSL9-G3 NR3	D77	23060676	22637300
G570WCU-2C-T2	QSX15-G9 NR2	D78	23006661	22637300
G450WCU-2C-T2	QSX15-G9 NR2	D96	23047533	22637300
G240WJD-2C-T3	JD 6068HF485	D97	22938419	22637300
G145WJD-2A-FX-T3	4045HF485	E22	23071459	22637300
G185WJD-2A-FX-T3	2000AMP C-H 75908	E23	44016046	22983407
G240WJD-2B-FX-T3	2000AMP C-H 75908	E24	44016053	22938419

G240WJD-2C-FX-T3	2000AMP C-H 75908	E25	44016053	22938419
G290WCU-3B-FX-T3	CU QSL9-G3-NR3 FLEX	E26	23060676	22637300
G290WCU-3C-FX-T3	CU QSL9-G3-NR3 FLEX	E27	23060676	22637300
G450WCU-2B-FX-T3	QSX15-G9 NR2 FLEX, T2	E28	23047533	22637300
G450WCU-2C-FX-T3	QSX15-G9 NR2, FLEX T2	E29	23047533	22637300
G570WCU-2B-FX-T3	QSX15-G9 NR2, FLEX T2	E30	23006661	22637300
G570WCU-2C-FX-T3	QSX15-G9 NR2, FLEX T2	E31	23006661	22637300
G325WCU-3A-T4I	QSL9-G8 G325 T4I	E44	46579519	
G240WCU-T4I	QSB6.7-G6	E51	46584420	
G70WJD-2A-FX-T3		E53		
G90WJD-2A-FX-T3		E54		
G190WCU-3A-T4i	QSB6.7-G7	E57	46584421	
G150WCU-3A-T4i		E77		
CONTAINERIZED GENERATOR		E79		
G85WCU-3A-T4I	QSB5-G8	E94	46624916	46624379
G125WCU-3A-T4I	QSB5-G9	E95	46624916	46624379
G70WCU-3A-T4I	QSB5-G7	E96	46630682	46624379
G240WCU-A3-T4F	QSB6.7 T4F	F33	46654879	46654880
G190WCU-A3-T4F	QSB6.7 T4F	F35	46654879	46654880
G150WCU-A3-T4F	QSB6.7 T4F	F36	46654879	46654880
				46668141
NG225WPS-3E		F56	46672647	46668141

LEGACY DEALER-INSTALLED OPTIONS

	G10A	G25B	G40B	G60	G80A
Serial Code	B63	B54	B50	B55	B51
Forklift Skid Kit	44020964	44021590	44020907	44020899	44020899
Fuel/Water Sep. Kit	44021681				
3-way Fuel Valve Kit	44021004	44021004	44013167	44020741	44020741
Battery Charger Kit		44021574	44020725	44020766	44020766
Battery Heater Kit		44021566	44020717	44020758	44020758
Block Heater Kit		44021582	44013464	44020733	44021343
Camlock Connectors Field Kit					
Remote Fuel (3-way Valve) Kit					

	G90A	G125	G145	G185
Serial Code	C24	C91	C24	C28
Forklift Skid Kit	44020980	44020972	44020980	
Fuel/Water Sep. Kit				
3-way Fuel Valve Kit	44021798	44021780	44021798	
Battery Charger Kit	44021863	44021889	44021871	44023570
Battery Heater Kit	44021855	44021855	44021855	44023588
Block Heater Kit	44021830	44021848	44021830	44023562
Camlock Connectors Field Kit				
Remote Fuel				
(3-way Valve) Kit				

	G240	G290	G450	G570
Serial Code	C31	C38	C34	C37
Forklift Skid Kit		44021079	44021087	44021087
Fuel/Water Sep. Kit				
3-way Fuel Valve Kit				
Battery Charger Kit	44023570			
Battery Heater Kit	44023588			
Block Heater Kit	44023562			
Camlock Connectors Field Kit		44023638	44023638	44023638
Remote Fuel				
(3-way Valve) Kit		44020923	44020782	44020782

DEALER-INSTALLED OPTIONS

Model	Serial Code	Part Description	Part Number
Generators T1-T3			
G25C	D61	External Fuel Connections (3 way) Field Kit	44021004
		Battery Charger Kit	44021574
		Battery Heater Kit	44021566
		Block Heater Kit	44021582
		Fork Lift Skid Kit	44021590
		G25/G40 AC Sense Field Kit	44033413
G70A	D63	Battery Heater Field Kit	44020758
		Fork Lift Skid Field Kit	44020899
		External Fuel Connections (3 way) Field Kit	44020741
		Block Heater Field Kit	44021343
		Battery Charger Field Kit	44020766
		Camlock Connectors Field Kit	44023638
		Diagnostic Gauge Trouble Code Reader	44030294
		Heated Hose (480V)	46573601
G70A_FLEX		Battery Heater Field Kit	44020758
		Fork Lift Skid Field Kit	44020899
		External Fuel Connections (3 way) Field Kit	44020741
		Block Heater Field Kit	44021343
		Battery Charger Field Kit	44020766
		Camlock Connectors Field Kit	44023638
		Diagnostic Gauge Trouble Code Reader	44030294
		Heated Hose (480V)	46573601
G90A	C24	Fork Lift Skid Kit	44020980
		3-Way Fuel Valve Kit	44021798
		Engine Block Heater	44021830
		Battery Heater Kit	44021855
		Battery Charger Kit	44021863
		Camlock Connectors Field Kit	44023638
		Diagnostic Gauge Trouble Code Reader	44030294
		Heated Hose (480V)	46573604
G90A_FLEX		Fork Lift Skid Kit	44020980
		3-Way Fuel Valve Kit	44021798
		Engine Block Heater	44021830
		Battery Heater Kit	44021855
		Battery Charger Kit	44021863
		Camlock Connectors Field Kit	44023638

Model	Serial Code	Part Description	Part Number
		Diagnostic Gauge Trouble Code Reader	44030294
		Heated Hose (480V)	46573604
G145B	C27	Fork Lift Skid Kit	44020980
		3-Way Fuel Valve Kit	44021798
		Engine Block Heater Kit	44021830
		Battery Heater Kit	44021855
		Battery Charger Kit	44021871
		Camlock Connectors Field Kit	44023638
		Diagnostic Gauge Trouble Code Reader	44030294
		Heated Hose (480V)	46573604
G145 FLEX	E22	Fork Lift Skid Kit	44020980
		3-Way Fuel Valve Kit	44021798
		Engine Block Heater Kit	44021830
		Battery Heater Kit	44021855
		Battery Charger Kit	44021871
		Camlock Connectors Field Kit	44023638
		Diagnostic Gauge Trouble Code Reader	44030294
		Heated Hose (480V)	46573604
G185	C28	Camlock Connectors Field Kit	44023638
		Block Heater Kit	44023562
		Battery Warmer Kit	44023588
		Battery Charger Kit	44023570
		Diagnostic Gauge Trouble Code Reader	44030294
		Heated Hose (480V)	46572999
G185 FLEX	E23	Camlock Connectors Field Kit	44023638
		Block Heater Kit	44023562
		Battery Warmer Kit	44023588
		Battery Charger Kit	44023570
		Diagnostic Gauge Trouble Code Reader	44030294
		Heated Hose (480V)	46572999
G240 FLEX	E24	Camlock Connectors Field Kit	44023638
		Block Heater Kit	44023562
		Battery Warmer Kit	44023588
		Battery Charger Kit	44023570
		Diagnostic Gauge Trouble Code Reader	44030294
		Heated Hose (480V)	46572999
SAO, G240 600V FLEX	E25	Camlock Connectors Field Kit	44023638
		Block Heater Kit	44023562
		Battery Warmer Kit	44023588
		Battery Charger Kit	44023570

Model	Serial Code	Part Description	Part Number
		Diagnostic Gauge Trouble Code Reader	44030294
		Heated Hose (480V)	46572999
G290	C38	Kit, Remote Fuel (3-way valve)	44020923
		Kit, Forklift Skid	44021079
		Kit, Camlock Connectors	44023638
		Diagnostic Gauge Trouble Code Reader	44030294
G290 FLEX	E26	Kit, Remote Fuel (3-way valve)	44020923
		Kit, Forklift Skid	44021079
		Kit, Camlock Connectors	44023638
		Diagnostic Gauge Trouble Code Reader	44030294
		Heated Hose (480V)	46573401
		Heated Hose (600V)	46573621
SAO, G290 600V	D77	Kit, Remote Fuel (3-way valve)	44020923
		Kit, Forklift Skid	44021079
		Kit, Camlock Connectors	44023638
		Diagnostic Gauge Trouble Code Reader	44030294
SAO, G290 600V FLEX	E27	Kit, Remote Fuel (3-way valve)	44020923
		Kit, Forklift Skid	44021079
		Kit, Camlock Connectors	44023638
		Diagnostic Gauge Trouble Code Reader	44030294
		Heated Hose (480V)	46573401
		Heated Hose (600V)	46573621
G325		Aftermarket G325 Safety Decals	46575679
		Aftermarket G325 Branding Decals	46576499
G450 FLEX	E28	Kit, Remote Fuel (3-way valve)	44020782
		Kit, Forklift Skid	44021087
		Kit, Camlock Connectors	44023638
		Diagnostic Gauge Trouble Code Reader	44030294
		Heated Hose (480V)	46573201
		Heated Hose (600V)	46573582
SAO, G450 600V FLEX	E29	Kit, Remote Fuel (3-way valve)	44020782
		Kit, Forklift Skid	44021087
		Kit, Camlock Connectors	44023638
		Diagnostic Gauge Trouble Code Reader	44030294
		Heated Hose (480V)	46573201
		Heated Hose (600V)	46573582
G570	C37	Kit, Remote Fuel (3-way valve)	44020782
		Kit, Forklift Skid	44021087
		Kit, Camlock Connectors	44023638

Model	Serial Code	Part Description	Part Number
		Diagnostic Gauge Trouble Code Reader	44030294
		Heated Hose (480V)	46573201
		Heated Hose (600V)	46573582
SAO, G570 600V		Kit, Remote Fuel (3-way valve)	44020782
		Kit, Forklift Skid	44021087
		Kit, Camlock Connectors	44023638
		Diagnostic Gauge Trouble Code Reader	44030294
		Heated Hose (480V)	46573201
		Heated Hose (600V)	46573582
SAO, G570 600V FLEX	E31	Kit, Remote Fuel (3-way valve)	44020782
		Kit, Forklift Skid	44021087
		Kit, Camlock Connectors	44023638
		Diagnostic Gauge Trouble Code Reader	44030294
		Heated Hose (480V)	46573201
		Heated Hose (600V)	46573582
G570 FLEX	E30	Kit, Remote Fuel (3-way valve)	44020782
		Kit, Forklift Skid	44021087
		Kit, Camlock Connectors	44023638
		Diagnostic Gauge Trouble Code Reader	44030294
		Heated Hose (480V)	46573201
		Heated Hose (600V)	46573582
Generators T4			
G40C T4	D62	Block Heater Field Kit	44013464
		External Fuel Connections (3 way) Field Kit	44013167
		Battery Heater Field Kit	44020717
		Fork Lift Skid Field Kit	44020907
		Battery Charger Field Kit	44020725
		Camlock Connectors Field Kit	44023638
G70WCU-3A-T4i	E96	Drawbar Mounted Cablebox (8)	44032084
		Spare Tire	46622301
		Camlock Option	46624606
		Shutdown Alarm Option	46568680
		Auto Oil-Level Maintainer	46629559
		Battery Charger	46628309
		Special Paint	36027122
		Rear Stabilizer Jackstands	46630741
		Keyed Lock, Doors	46575720
		Lojack	46641468
G85WCU-3A-T4i	E94	Drawbar Mounted Cablebox (8)	44032084
		Spare Tire	46622301

Model	Serial Code	Part Description	Part Number
		Camlock Option	46624606
		Shutdown Alarm Option	46568680
		Auto Oil-Level Maintainer	46629559
		Battery Charger	46628309
		Special Paint	36027122
		Rear Stabilizer Jackstands	46630741
		Keyed Lock, Doors	46575720
		Lojack	46641468
G125WCU-3A-T4i		Drawbar Mounted Cablebox (8)	44032084
		Spare Tire	46622301
		Camlock Option	46624606
		Shutdown Alarm Option	46568680
		Auto Oil-Level Maintainer	46629559
		Battery Charger	46628309
		Special Paint	36027122
		Rear Stabilizer Jackstands	46630741
		Keyed Lock, Doors	46575720
		Lojack	46641468
G150WCU-3A-T4i		Kit, Keyed Alike Door Locks	46604672
		Kit, Battery Charger	46604675
		Kit, Spare Tire	46604678
		Kit, External Fuel	46606639
		Kit, Cold Start	46606641
G190WCU-3A-T4i	E57	Kit, Keyed Alike Door Locks	46604672
		Kit, Battery Charger	46604675
		Kit, Spare Tire	46604678
		Kit, External Fuel	46606639
		Kit, Cold Start	46606641
G240WCU-3A-T4i	E51	Kit, Keyed Alike Door Locks	46604672
		Kit, Battery Charger	46604675
		Kit, Spare Tire	46604678
		Kit, External Fuel	46606639
		Kit, Cold Start	46606641

SECTION 5

Lighting Systems

LIGHT TOWERS - BULBS

Light Tower Model	Bulb Type	Part #	Color	Watts/ Light	Mean Lumen	Average Life (Hrs)
L5	High Pressure Sodium	36796837	Soft Orange	1,000	126,000	24,000
	Metal Halide	36847747	Bright White	1,000	88,000	12,000
	Tungsten Halogen	N/A	N/A	N/A	N/A	N/A
L5U	High Pressure Sodium	N/A	N/A	N/A	N/A	N/A
	Metal Halide	N/A	N/A	N/A	N/A	N/A
	Tungsten Halogen	36885804	Natural Daylight White	1,000	20,850	2,000
L5E	High Pressure Sodium	N/A	N/A	N/A	N/A	N/A
	Metal Halide	N/A	N/A	N/A	N/A	N/A
	Tungsten Halogen	36795417	Natural Daylight White	1,000	20,850	2,000
L6, L6B, L6C	High Pressure Sodium	36779494*/36796837	Soft Orange	1,000	126,000	24,000
	Metal Halide	36847747	Bright White	1,000	88,000	12,000
	Tungsten Halogen	36795417	Natural Daylight White	1,000	20,850	2,000
L6A	High Pressure Sodium	36796837	Soft Orange	1,000	126,000	24,000
	Metal Halide	36847747	Bright White	1,000	88,000	12,000
	Tungsten Halogen	36795417	Natural Daylight White	1,000	20,850	2,000
L8	High Pressure Sodium	36779494*/36796837	Soft Orange	1,000/ 1,500	126,000	24,000
	Metal Halide	36847747/36796017	Bright White	1,000	88,000	12,000
	Tungsten Halogen	36792398***	Natural Daylight White	1,000	34,730	2,000
L8A, L8B, L8C	High Pressure Sodium	36796837	Soft Orange	1,000	126,000	24,000
	Metal Halide	36847747	Bright White	1,000	88,000	12,000
	Tungsten Halogen	36792398***	Natural Daylight White	1,500	34,730	2,000
L20	High Pressure Sodium	N/A	N/A	N/A	N/A	N/A
	Metal Halide	23084965	Bright White	1,000	95,000	12,000
	Tungsten Halogen	N/A	N/A	N/A	N/A	N/A

* 36779494 was only used on early L6 and L8 units equipped with ballast capable of handling high pressure sodium bulbs exclusively.

** 36796019 Conversion of L8 units from 1000 to 1500 watt bulbs requires different ballast kits.

*** Non-tungsten halogen units cannot be converted to tungsten halogen in the field because of extensive electrical modifications.

Value Replacement Bulbs

Light Tower Model	Bulb Type	Part #	Watts	Lot Size
Rectangular Lamp Assemblies	Metal Halide	46633080	1000	12/box
Round Lamp Assemblies	Metal Halide	46633079	1000	6/box

Balloon Lights

Part #	Description	Notes
Complete Parts and Kits		
46620111	BL2000 Light	Complete and ready to mount: includes case and 2 bulbs.
36145167	Kit: 7' – 24' Tripod and Grip Head	Incl. #22407555 & #16534554
22407548	Kit: 7' – 19' Tripod and Grip Head	Not sold as individual accessories.
36145175	Kit: Grip Head, Pole Mount and Truck Mount	Incl. #16534554, #22367981 & #22367973
36141216	Kit: Grip Head with Pole Mount	Incl. #16534554 & #22367981
Individual Accessories		
16534554	Grip Head/Tilting Device	
22407555	Tripod Stand	Extension for stand-alone uses. Replacement tripod stand only. Grip head must be ordered separately or kits 36145167 or 22407548 can be purchased which include grip head.
22367981	7' – 15' Pole Mount	Extension mounts to any equipment with locally sourced hardware. Replacement pole mount only. Grip head must be ordered separately or kit 36141216 can be purchased which includes grip head.
22367973	7' – 15' Truck Mount	Extension mounts directly to a vehicle's receiver hitch. Replacement truck mount only. Grip head must be ordered separately or kit 36145175 can be purchased which includes grip head.
46621054	1000 Watt Bulb	



LEGACY MAINTENANCE KITS

Assorted kits have been developed for a wide range of Lighting Systems. The following list provides the contents and part numbers. The kits available below list the quantities of each filter within the assigned kit.

Key:

A= "Filter Change Kit" gives the user one complete change of elements *excluding* separator elements.

B= "Filter Kit" gives the user multiple quantities of all compressor and engine elements *excluding* separator elements.

*= Denotes the quantity of the filters used in the machine.

Model	Kit Part #	Kit Hours	Quantities			Contents	
			A	B	*	Part #	Description
L6-4MH	A 36006807		1	1		36791895	Engine Air Filter
L6A-4MH	B 36006815		1	4		36791911	Engine Oil Filter
			1	6		36791929	Engine Fuel Filter
			1	6		35366699	In Line Fuel Filter
L8-4MH	A 36006823		1	1		36791903	Engine Air Filter
L8A-4MH	B 36006831		1	4		36791911	Engine Oil Filter
			1	6		36791929	Engine Fuel Filter
			1	6		35366699	In Line Fuel Filter
L5K*	A 36023174		1	1		36791895	Engine Air Filter
L6B-4MH	B 36023182		1	4		36870574	Engine Oil Filter
L8B-4MH			1	6		36870566	Engine Fuel Filter
L6C-4MH			1	6		36845493	In Line Fuel Filter
L8C-4MH							
*For models with air filter elements that have air fins							
L5K*	A 36042901		1	1		36890135	Engine Air Filter
L6-4MH	B 36042919		1	4		36870574	Engine Oil Filter
Light Source			1	6		36870566	Engine Fuel Filter
			1	6		36845493	In Line Fuel Filter
*For models with air filter elements that have air fins							
L5Y	A 36039725		1	1		36888527	Engine Air Filter
	B 36039733		1	4		36888550	Engine Oil Filter
			1	6		36888592	Engine Fuel Filter
L20	A 44003945		1	1	1	85426823	Fuel Filter
	B 44003952		1	1	1	85426856	Oil Filter
				1	1	35393685	Primary Element
				1	1	54525530	Fuel / Water Element

MAINTENANCE KITS

Model	Serial Code	Kit Part #	Maintenance Interval	QTY	Consumable Part #	Description
L20-60HZ-T2	D55	44003663	250 hrs w/ fluids			
				1	54480918	Engine Oil, 1 Gal
				1	85426823	Filter, Fuel
				1	85426856	Filter, Oil
		44003945	250 hrs w/o fluids			
				1	85426823	Filter, Fuel
				1	85426856	Filter, Oil
		44003671	500 hrs w/ fluids			
				1	54525530	Element, Fuel/ Water
				1	35393685	Element, Primary
				1	54480918	Engine Oil, 1 Gal
				1	85426823	Filter, Fuel
				1	85426856	Filter, Oil
		44003952	500 hrs w/o fluids			
				1	54525530	Element, Fuel/ Water
				1	35393685	Element, Primary
				1	85426823	Filter, Fuel
				1	85426856	Filter, Oil
L20-60HZ-T4I	D59	44003945	250 hrs w/o fluids			
				1	85426823	Filter, Fuel
				1	85426856	Filter, Oil
		44003671	500 hrs w/ fluids			
				1	54525530	Element, Fuel/ Water
				1	35393685	Element, Primary
				1	54480918	Engine Oil, 1 Gal
				1	85426823	Filter, Fuel
				1	85426856	Filter, Oil
		44003952	500 hrs w/o fluids			
				1	54525530	Element, Fuel/ Water
				1	35393685	Element, Primary
				1	85426823	Filter, Fuel
				1	85426856	Filter, Oil

LSC-60HZ-T4F	E06	46618979	250 hrs w/o fluids			
				1	36870566	Filter, Fuel
				1	36845493	Filter, Fuel .7Mm Media
				1	36870574	Filter, Oil
		46618980	500 hrs w/o fluids			
				1	46606880	Element, Air Cleaner
				1	36870566	Filter, Fuel
				1	36845493	Filter, Fuel .7Mm Media
				1	36870574	Filter, Oil
LSCWKUB-60HZ-T4F	E83, E84	46618979	250 hrs w/o fluids			
				1	36870566	Filter, Fuel
				1	36845493	Filter, Fuel .7Mm Media
				1	36870574	Filter, Oil
		46618980	500 hrs w/o fluids			
				1	46606880	Element, Air Cleaner
				1	36870566	Filter, Fuel
				1	36845493	Filter, Fuel .7Mm Media
				1	36870574	Filter, Oil



LEGACY LIGHT TOWER MANUALS

Model	Serial Code	Manual #	Description
L6, L8		22862387	Parts
L6, L8, LS, LSC		2924369	OPS
LS 60 Hz		22902465	Parts
L20 Tier 2		23237399	Options
L20 Tier 2		23240211	OPS
L20 Tier 2		23237720	Parts
L20 Tier 4		46552003	Parts
MVS6		23242795	OPS
MVS6		46551866	Electronics Pod
MVS6		23210990	Parts
MVS6		23291313	Trouble Shooting
MVS6		46551871	Mounting Kit
50 Hz		22930028	Parts
50 Hz		22545495	OPS

LIGHT TOWER MANUALS

Model	Driver	Serial Code	Parts Manual	Operation Manual
L6 D	3CYL KUBOTA D1105, T4	C45	22862387	22924369
LS-60HZ-T4F	3CYL KUBOTA D1105, T4	D47	22902456	22902415
L6-60HZ-T4F	3CYL KUBOTA D1105, T4	D48	22862387	22924369
L8-60HZ-T4F	3CYL KUBOTA D1105, T4	D49	22862387	22924369
L20-60HZ-T2	G25	D55	23237720	23240211
LS-60HZ-T4F	3CYL KUBOTA D1105, T4	D56	22902456	22902415
L20-60HZ-T4I	G25C, T4	D59	46552003	23240211
L6-60HZ-T4F	3 CYL KUBOTA, T4	D88	22862387	22924369
L8-60HZ-T4F	3 CYL KUBOTA, T4	D89	22862387	22924369
LS-60HZ-T4F	3 CYL KUBOTA, T4	D92	22902456	22902415
LS-60HZ-T4F	3CYL KUBOTA D1105, T4	D98	22902456	22902415
LSC-60HZ-T4F	MI L3	E06	46551817	22924369
LSCWKUB-60HZ-T4F	KUBOTA 1005, T4	E83	46611282	22924369

LEGACY OIL COOLER/RADIATOR LIST

Model	Cooler	Radiator
L5K	None	36888451
Light Source	None	36888451
L6C	None	36888451
L8C	None	36888451

OIL COOLER/RADIATOR LIST

Model	Serial Code	Radiator	Comment
L6 D	C45	36888451	S/N prior 384254
		23083405	S/N begin 384254
LS-60HZ-T4F	D47	36888451	S/N prior 383711
		23083405	S/N begin 383711
L6-60HZ-T4F	D48	36888451	
L8-60HZ-T4F	D49	36888451	S/N prior 384254
		23083405	S/N begin 384254
L20-60HZ-T2	D55	22233340	
LS-60HZ-T4F	D56	36888451	S/N prior 383711
		23083405	S/N begin 383711
L20-60HZ-T4I	D59	46495263	
L6-60HZ-T4F	D88	36888451	
L8-60HZ-T4F	D89	46545695	
LS-60HZ-T4F	D92	46545695	
LS-60HZ-T4F	D98	46545695	
LSC-60HZ-T4F	E06	46499398	
LSCWKUB-60HZ-T4F	E83	46605079	


DEALER-INSTALLED OPTIONS

Model	Serial Code	Part Description	Part Number
Lighting System T1-T3			
L6	D88	Electric Winch Field Kit	44025872
L8	D89	Electric Winch Field Kit	44025872
LIGHT SOURCE 50HZ	D90	Field Kit - Electric Winch	44018273
		Field Kit - Autostart	44009926
LIGHT SOURCE 60HZ	D92	Field Kit - Electric Winch	44018273
		Field Kit - Autostart	44009926
		Field Kit - Ground Rod	46588259
Lighting System T4			
MVS 6A-T4		Kit, Extreme Cold Weather	44033272
L20 4MH-T4	D59	Autolight Field Kit	44025153
		Cold Start Field Kit	44026003
		Electric Winch Field Kit	44025872
		Fuel Level Gauge and Shutdown Field Kit	44025620

This page is intentionally left blank.



Portable Power

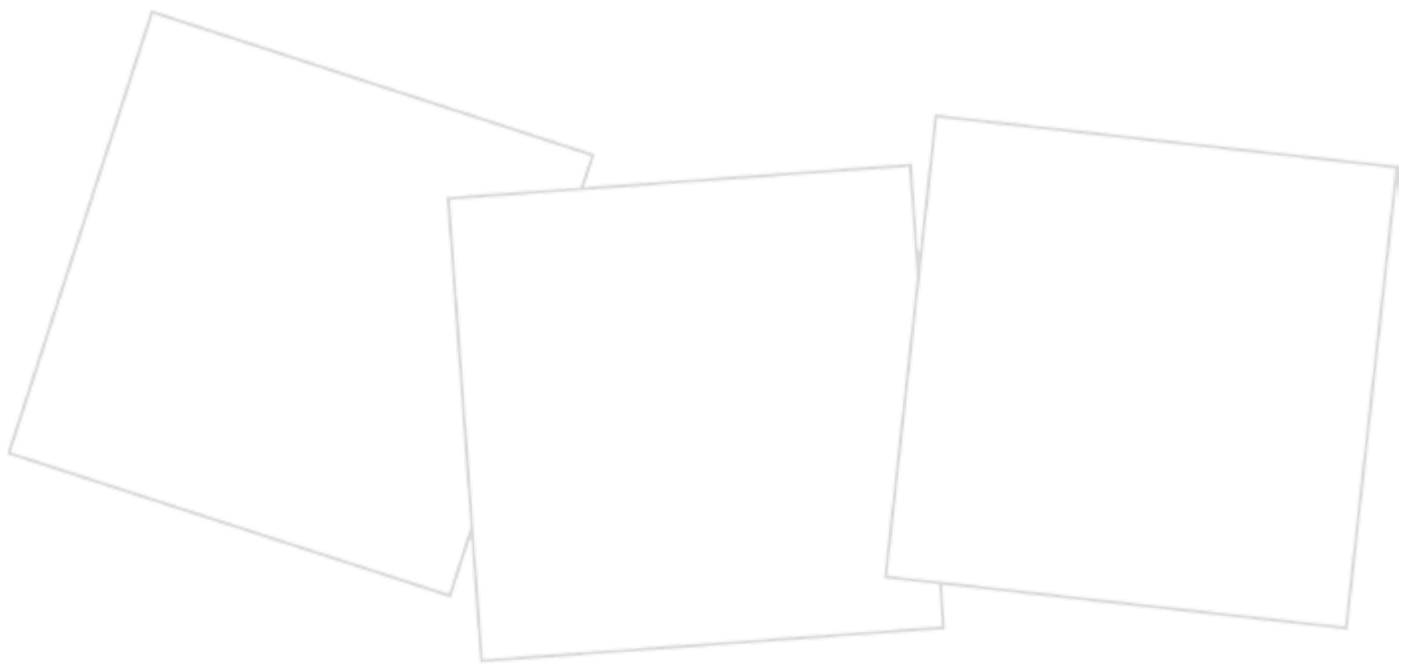

SECTION 6

Light Compaction



Compaction

Model	Description	Part #
Roller Options		
SX-170H	Truck Hook Assembly	59954149
DX-500E		54679212
DX-600E		54679212
DX-700E		54679212
Rammer Options		
RX-264H	Narrow Foot (4in. x 13in. / 152 x 330 mm)	13373550
RX-264H	Narrow Foot (8in. x 13in. / 200 x 330 mm)	58836974
RX-304H	Narrow Foot (9in. x 13in. / 230 x 330 mm)	59106369
RX-344H	Narrow Foot (9in. x 13in. / 230 x 330 mm)	59106369
BXR-300E	Extension Plates (3in. / 76 mm per side)	54692603





SECTION 7

Reference

AIREND SERIAL NUMBERS

Reading Airend Serial Numbers

Unique airend serial numbers came into use in 1970. As with complete units, it was decided that Utility Equipment would use a serial code system for identifying airends. The serial code system would be two (2) digits instead of three (3) (which the complete machines have.)

Serial numbers with 5 digits in front of the "U" or "US" began in January 2001.

An example of a serial number is as follows:


11326/U/12/NR	
11326	Unique serial number
"U" or "US"	"Manufactured in Mocksville" or "Manufactured in Statesville"
12	Manufactured in 2012
NR	Airend serial code

You may also notice a serial number which contains "RU" or "RS" instead of just "U" or "US." "RU" designates that the airend was rebuilt in Mocksville, NC. Airends stamped "RS" indicate units rebuilt in Statesville, NC. However, this does not mean that any used components were utilized in the building of the airend.



Example of serial number location.

Airend Serial Number Location

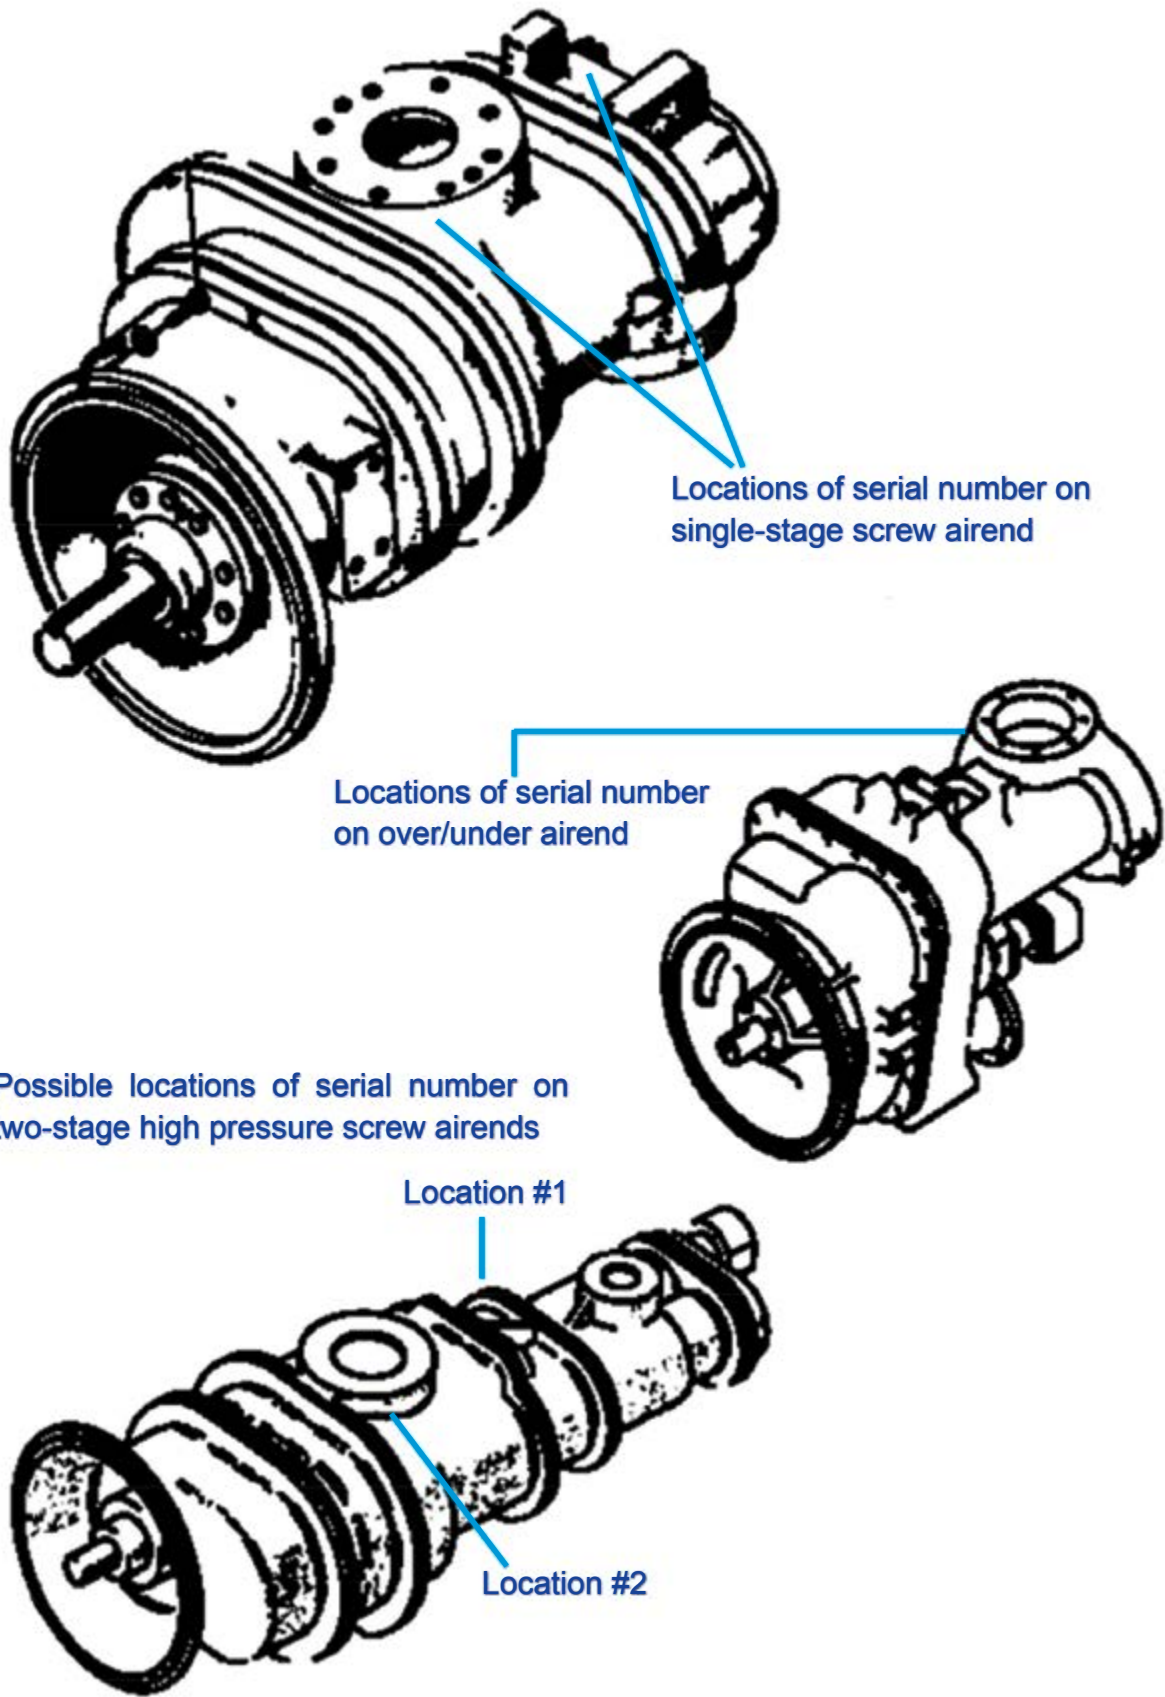

Airend Serial Number Locations on Small to Medium Air Compressors



Airend Serial Number Locations on Large Air Compressors



COMPRESSOR SERIAL NUMBERS

Small to Medium Air Compressor Serial Number Location



C185 Air Compressor Serial Number Location




Large Air Compressor Serial Number Location




GENERATOR SERIAL NUMBERS



Compressors - Serial Plate Nomenclature

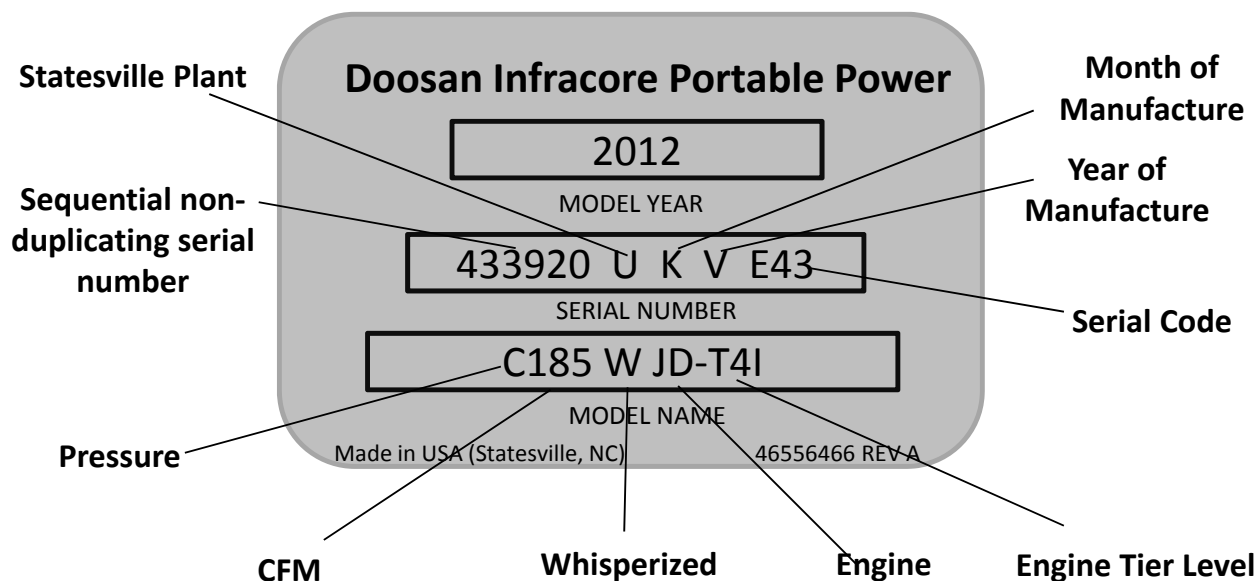


Generators - Serial Plate Nomenclature

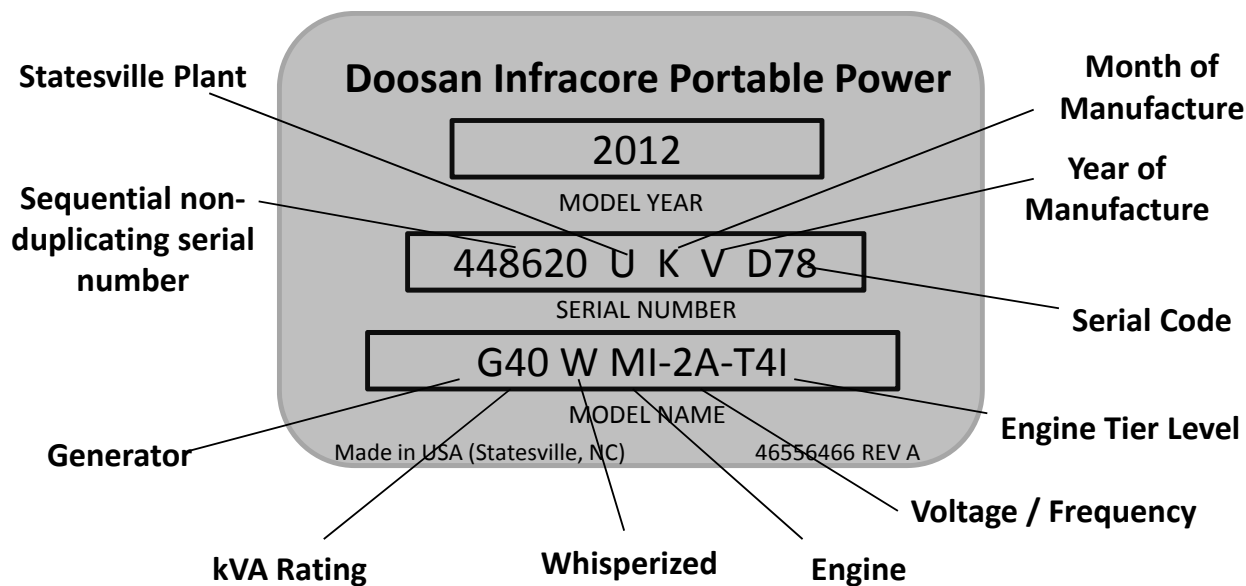

Light Towers - Serial Plate Nomenclature

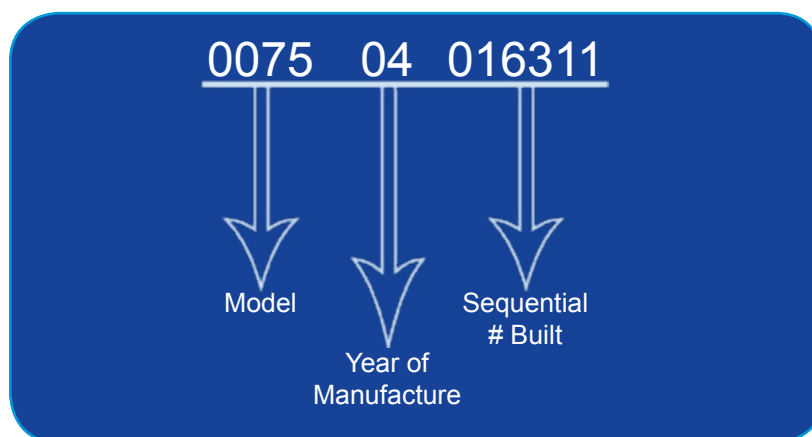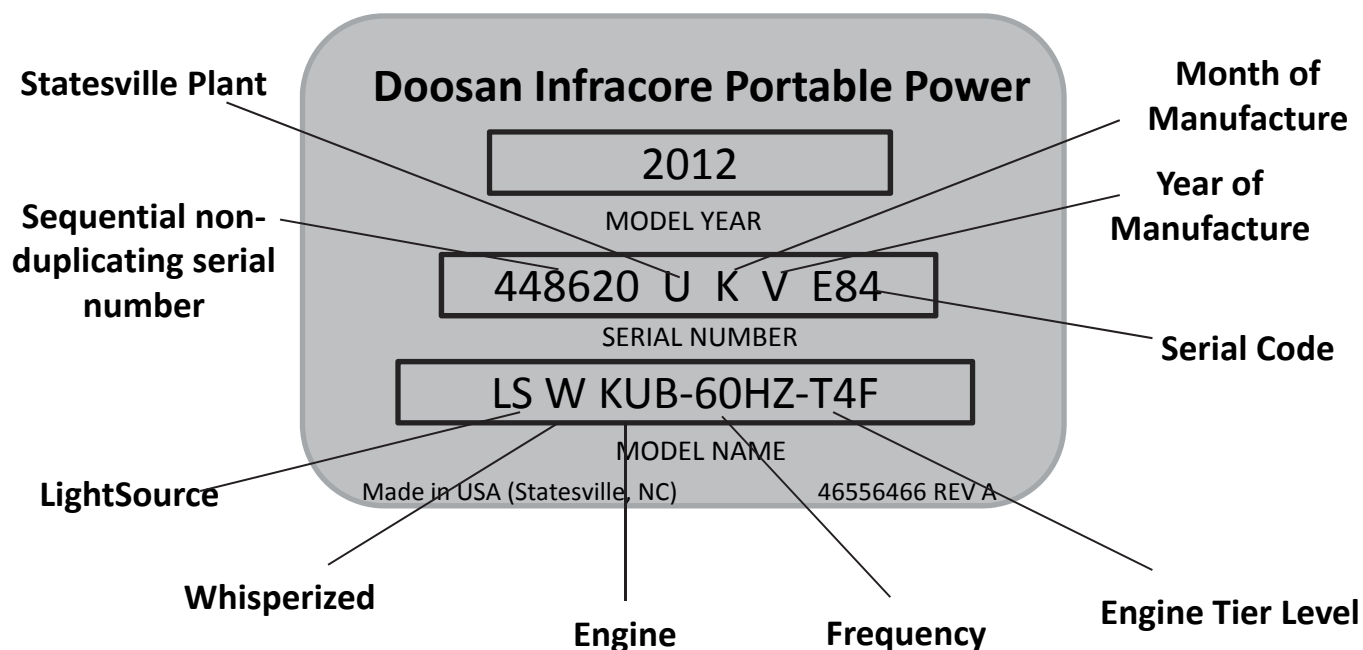

Example of decal for models G115/4231703-001

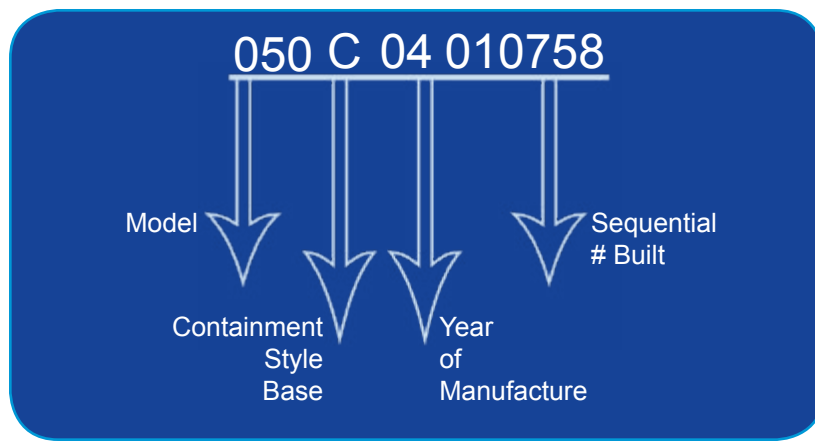

** The PowerSource line of mobile generators will follow the same serial number layout and nomenclature traditionally found on Doosan portable compressors (example: 123456 U AB B01)*

Small to Medium Generator Serial Number Location



Large Generator Serial Number Location



LIGHTING SYSTEM SERIAL NUMBERS

L20



L6/L8



LS



LSC



LIGHT COMPACTION SERIAL NUMBERS

Reading Light Compaction Serial Numbers

N/D/035 8	Model DX-500E/Manufactured in 2003/35 models manufactured
N	Model
D	Year of Manufacture
035	Number of Models Manufactured

Symbol		New Model	Symbol		Year of Manufacture
A	=	BX-6 Series	A	=	2000
B	=	BX-8 Series	B	=	2001
C	=	BX-12 Series	C	=	2002
D	=	BXR-60H (BXR-60 Series)	D	=	2003
E	=	<i>BXR-70 (non-production)</i>	E	=	2004
F	=	BXR-100	F	=	2005
G	=	BXR-200H (BXR-200 Series)	G	=	2006
H	=	BXR-300	H	=	2007
I	=	Unused Alphabet	I	=	Unused Alphabet
J	=	RX-264H (RX-554)	J	=	2008
K	=	RX-304H (RX-654H Series)	K	=	2009
L	=	RX-344H (RX-754 Series)	L	=	2010
M	=	<i>SX-17 (non-production)</i>	M	=	2011
N	=	DX-500E	N	=	2012
O	=	Unused Alphabet	O	=	Unused Alphabet
P	=	DX-600E and DX-600H	P	=	<i>For Prototype Machine</i>
Q	=	Unused Alphabet	Q	=	Unused Alphabet
R	=	DX-700E and DX-700H	R	=	2013
S	=	BX-60 Series	S	=	2014
T	=	BX-80 Series	T	=	2015
U	=	BX-120 Series	U	=	2016
V	=	SX-170H	V	=	2017
W	=	Blank	W	=	2018
X	=	Blank	X	=	2019
Y	=	Blank	Y	=	2020
Z	=	Blank	Z	=	Unused Alphabet

VEHICLE IDENTIFICATION NUMBERS (VIN)

The VIN decal is attached to the exterior of all post-January 2000 models.

MANUFACTURED BY:		Doosan Infracore Portable Power	
DATE: 06/10/2011		GVWR (LBS): 5866	
GAWR (LBS) (1) 5455	TIRE ST235/80R16	RIM 16 X 6K	PSI 65
THIS VEHICLE CONFORMS TO ALL APPLICABLE FEDERAL MOTOR VEHICLE SAFETY STANDARDS IN EFFECT ON THE DATE OF MANUFACTURE SHOWN ABOVE.			
V.I.N 4FVCABDA7BU426825			
TYPE OF VEHICLE: TRAILER			
MANUFACTURED BY / FABRIQUÉ PAR:		Doosan Infracore Portable Power	
V.I.N./N.I.V. 4FVCABDA7BU426825			
GVWR/PNVB (KG) : 2661		DATE: 06/10/2011	
TYPE OF VEHICLE/TYPE DE VÉHICULE:		TRA/REM	COLD INFL PRESS/PRESS DE GONF. A FROID
GAWR/PNBE (KG) (1) 2474	TIRE/PNEU ST235/80R16	RIM/JANTE 16 X 6K	PSI/LPC (KPA) 65/448
THIS VEHICLE CONFORMS TO ALL APPLICABLE STANDARDS PRESCRIBED UNDER THE CANADIAN MOTOR VEHICLE SAFETY REGULATIONS IN EFFECT ON THE DATE OF MANUFACTURE.		CE VÉHICULE EST CONFORME A TOUTES LES NORMES QUI LUI SONT APPLICABLES EN VERTU DU REGLEMENT SUR LA SECURITE DES VEHICULES AUTOMOBILES DU CANADA EN VIGUEUR A LA DATE DE SA FABRICATION.	
		23241045 REV.A	

17 Digit VIN Number Logic

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
Manufacturers ID			TYPE	SERIES	CONFIGURATION	LENGTH	AXLE	CHECK DIGIT	MODEL YEAR	PLANT	FIRST 6 DIGITS FROM UNIT SERIAL #					
			C - Compressor	if type=C	A=Standard	A=12 ft	A=Single	*SUM/11	See Table	U=Mocksville US=Statesville						
			G - Genset		B=Whisperized	B=13 ft	B=Tandem		V=1997							
			L - Light Tower	COMPRESSORS		C=14 ft			W=1998							
				A=100psi		D=15 ft			X=1999							
				B=125psi		E=16 ft			Y=2000							
				C=150psi		F=17 ft			1=2001							
				D=170psi		G=18 ft			2=2002							
				E=200psi		H=19 ft			3=2003							
				F=250psi		J=20 ft			4=2004							
				G=300psi		K=21 ft			5=2005							
				H=350psi		L=22 ft			6=2006							
									Etc.							
				if type=G												
				GENSETS												
				A=11KVA												
				B=18KVA												
				C=28KVA												
				D=49KVA												
				E=145KVA												
				F=193KVA												
				G=262KVA												
				H=327KVA												
				I=460KVA												
				J=584KVA												
				K=31KVA												
				L=38KVA												
				M=63KVA												
				N=75KVA												
				O=100KVA												
				P=120KVA												
				Q=165KVA												
				if type=L												
				LIGHT TOWERS												
				R=5KW												
				S=6KW												
				T=8KW												

Doosan Portable Power updates the model nomenclature layout to add clarity around tier changes in engines, and model detail differences. Examples are:

- Compressor models: P185WJD – T4i
- Generator models: G145WJD – 2A – T3
- Light tower models: L6 – 60Hz – T4F

PARTS DETERMINATION

“Determining Which Parts Book to Use and Reading Serial Numbers for Complete Machines”

With the introduction of several new lines of equipment in 2001, Portable Power/Aftermarket, became responsible for servicing over 600 different styles of portable compressors, generator sets, and light towers beginning with the introduction of the vane style portable in the early 1950's. At the same time, our distributors became tasked with the responsibility of determining which style portable machine a customer actually had and what parts book he or she should use to obtain correct part numbers. Needless to say, the task was monumental.

We feel that with the systematic approach given below, a dealer can correctly identify what he or she is working on and procure what it will take to fix it.

The distributor should try to obtain two important things from the customer; these are:

- A. Model: (Example: P100WD)
- B. Serial Number of Unit: (Example: 100624U78910)

A. Model

The distributor has to determine the exact model of the unit before he or she can choose the appropriate parts book or microfiche to use. For example- if a customer came to your counter looking for parts to fit his or her 600 cfm compressor - your choices would be:

1) DR600	18) XP600BWGM
2) DR600T	19) XP600CWGM
3) DL600	20) XP600 SGM
4) EL600	21) DXL600-A-CAT
5) DXL600H	22) XP600 CUM
6) DXL600HS	23) HP600 CUM
7) DXL600A	24) DXL600AH-CAT
8) DXL600B	25) HP600CMH
9) DXL600AH	26) HP600AWCU
10) DXL600BH	27) HP600BWCU
11) DXLCA600H	28) XP600AWCU
12) HP600WGM	29) P600WCU
13) HP600AWGM	30) P600AWCU
14) HP600BWGM	31) HP600CWCU
15) XP600SCU	32) HP600WJD
16) XP600WGM	33) XHP600SCAT
17) XP600AWGM	

The point remains that each of the above alphanumeric notations—both prefix and suffix—that go with the “600” are very important. Each set of letters has its own specific meaning.

For example:

- ◇ Do not use a G175 book for a P175WD unit.
- ◇ Do not use a P100WW book for a P100WD unit.
- ◇ Do not use a XP600WGM book for a XP600AWGM unit.
- ◇ Do not use a DXL750A book for a DXL750 unit.
- ◇ Do not use a DXL900 book for a XP900WGM unit.

Notations for Non P-Line Portable Compressors

Below are listed the most important notations that you will come across on Non P-Line compressors.

A	Redesign of earlier model	L	Type of screw compressor
B	Redesign of earlier model	P	125 lb. unit
CA	CAT engine	PTO	Power take off unit
CU	Cummins engine	R	Rotary vane notation
CW	Clockwise rotation	RA	Style of rotary vane - two-stage
CWW	Counter clockwise rotation	RB	Style of rotary vane - single-stage
D	Diesel engine	RMS	Military spec.
D	Deutz engine	RR	Rand Air version
E	Electric driven	RS	Power take off rotary vane
F	Ford engine	S	Silenced version
FF	Ford engine	SL	Special silenced version
G	Gasoline engine	T	"Trucm" version
H	Hercules engine	U	Utility model
H	150 lb. pressure unit	XL	Style of Screw Compressor
IH	International engine		

Notations for P-Line Portable Compressors

Below are listed the notations that will come across on the P-Line compressors.

Prefixes:

P	100PSI	VHP	151 thru 249 PSI	XHP	250PSI or up
XP	125PSI	SHP	250PSI	RHP	300PSI
MHP	175PSI	NHP	151 thru 249PSI (Non Lube)		
NXP	125PSI (Non Lube)	HP	150PSI		

Suffixes:

- ◇ "A," "B," "C," "D," "E," "F" – Designates that the unit is a redesigned model. In other words XP600AWGM is not the same unit as XP600WGM, or XP750WGM is not the same unit as XP750AWGM.
- ◇ "W" or "S" – Designates whispered or standard.

- ◇ “F,” “W,” “D,” “GM,” “CU,” “CAT” or “JD” – These notations after the “Whisperized” or “Standard” notations refer to the driver.

W	White	CAT	Caterpillar
D	Deutz	JD	John Deere
GM	General Motors	F	Ford
CU	Cummins	IR	Ingersoll Rand

- ◇ “U” – Designates utility version. Example – P100AWWU – This means:

P	100PSI	W	Whisperized
100	100cfm	W	White engine
A	Redesigned unit	U	Utility version

- ◇ The other suffixes you may encounter after the cfm rating:

O.F.	Oil Field Rig	A.T.	Automatic Transmission
D.D.	Direct Drive		

Notations for Generators, Light Towers and Abrasive Blasting Equipment

Prefixes:

E	Generator (60HZ)	A	Aftercooler
AC	Abrasives Conditioner	AD	Aftercooler – Dryer
L	Light Tower	AF	Aftercooler – Filter
G	New line of generators (G3.5 thru G575)	DC	Dust Collector
G	Generator (50HZ)		

(Only for units with suffixes – ex. G30WCU)

Numeric Reference – Watts or Kilowatts, cfm rating, kilo volt Amperes.

Suffixes (For Generators):

- ◇ X – Extra Quiet
- ◇ W – Whisperized
- ◇ JD, CU, H, V, R designate engine make:

R	Robins	CU	Cummins
J.D.	John Deere	H	Honda
V	Vanguard		

- ◇ E – Electric Start

Suffixes (For Light Towers):

- ◇ 4MH – Number and type of Lamp (ex. 4 metal halide lamps)

Notations for Compressor Modules

Prefixes: Same as aforementioned listing.

Suffixes:

- ◇ CM – Compressor Module (shaft -mounted fan cooling)
- ◇ CMH – Compressor Module (hydraulic-mounted fan cooling)
- ◇ Notations for Special Natural Gas powered units.
- ◇ Numeric Reference – cfm Rating

L	100PSI	HH	150PSI
H	125PSI	NG	Natural Gas

B. Serial Number of Model

Distributor should always try to obtain the unit serial number – “The Complete Serial Number.”

For example -

101366 is a serial number, **but**
101366U79910 is the complete serial number.

From the early 1950’s to 1970, serial numbers were in the following sequence types:

1)	600AR18719	R600 serial #18719
2)	125SRA19209	RA125 serial #19209
3)	A85RR61253	RR85 serial #61253
4)	50621L900M	L900 serial #50621

These serial numbers gave the style of unit and the unique serial number. They were stamped on the airend and on the Portable Machine identification plate.

Beginning in the 1970 Portable Power/Utility Equipment went to a serial code system for serial numbers. The basic concept was simple- in that, a three digit serial code would represent each style of machine built by the Portable Division/Utility Equipment. The same concept was carried on until 1991.

Example of “Serial Code” type serial number:		
98716U77500		
1)	98716	Unique serial number.
2)	U	Unit was manufactured in U.S.
3)	77	Unit was manufactured in 1977.
4)	500	Serial code for DR600.

Also at this point in time, the compressor serial number was removed from the airend. In its place was stamped a unique airend serial number (see Airend Serial Numbers,

Compressor section page 90) which was totally different from the compressor serial number. The compressor serial number was now stamped on the frame on the right hand side of the unit- when facing the drawbar looking toward the unit. This may vary from unit to unit.

Beginning in 1991, with unit serial number 194276, the year of manufacture was removed from the serial number. A typical serial number looked as follows: 195200U578.

Also in 1991, at unit serial number 199888, the serial number was no longer stamped on the frame of the unit.

Effective in August 1992, with unit serial number 214473, the numeric year of manufacture was reinstated by using two letters that give you the actual month and year of manufacture. The month and year of manufacture is encoded into the serial number according to the coding system that follows.

The new serial number plate will now show the model number for easier identification. This model number will be the nomenclature such as P185WJD. The letter immediately following the Model Year is a code that indicates the current model configuration of the unit. This is just one more feature that will make ordering service parts and referencing maintenance manuals easier.

Location of Serial Number Plates	Effective with S/N 214473
Utility Mount Compressors:	Left hand side (airend oil filter side) of fan shroud, or inside of door at instrument panel.
Platinum Series (P100 thru P185):	Inside front panel near radiator (street side), or curb side fan shroud.
P250 thru P375 Cummins and John Deere:	Fan shroud (curb side).
Prestige Series (100 thru 250 cfm), P250WD, VHP300WD/P375WD, HP375WD, XP400WD, P425WD, XHP600/750SCAT, and Towable Generators:	Left hand side (street side) of fan shroud, or above instrument panel on horizontal part of box.
Fast Tracks (New style with fenders):	Fan shroud (curb side), or above instrument panel on horizontal part of box.
Fast Tracks, Large EPA, HP300WCU, P375WCU, HP450WCU, XP525WCU, P600WCU and other intermediate size compressors:	Above instrument panel on horizontal part of box.
AF-1600:	On outside of the discharge pipe support, midway between sub-base and top.
L6/L8 Light Towers:	On the backside of the instrument/control panel rear cover in top right hand corner. L6A and L8A: on left hand side (street side) of rear tower support above fan shroud. L6B and L8B: Right hand side (inside of unit) of rear panel near radiator. L6C and L8C: radiator side support on curb side.
Light Source:	Top of instrument panel box.
E30/38, E50/63:	Fan shroud (street side)
E75/100/125/160:	Fan shroud (street side)
Generators (G3.5 through G575):	Decal located near instrument panel or on exterior bottom frame rail.
AD55, 85, 165:	Below air inlet valve on frame.
Compressor Module:	On top of inside bottom frame rail.

We have also had requests from the field to change to a model year on our units similar to that used by the automobile manufacturers. Starting September 1, 1992, we changed to a model year that runs from September 1 to August 31 of the following year. For example, any unit manufactured between September 1, 1992, and August 31, 1993, will carry a 1993 model year designation. Units manufactured between September 1, 1993, and August 31, 1994 will be 1994 models, etc.

Important Note: The explanation of how serial numbers work does not apply to our new line of generators (G3.5V through G575). Example of new style generator serial number-G115/4231703-001. Also, these units utilize a serial number decal instead of metal plate.

Month of Manufacture	Code	Year of Manufacture	Code
January	A	1992	B, C
February	B	1993	D
March	C	1994	E
April	D	1995	F
May	E	1996	G
June	F	1997	H
July	G	1998	I
August	H	1999	J
September	I	2000	K
October	J	2001	L
November	K	2002	M
December	L	2003	N
		2004	O
		2005	P
		2006	Q
		2007	R
		2008	S
		2009	T
		2010	U
		2011	V
		2012	W
		2013	X
		2014	Y
		2015	Z

DOOSAN SERIAL CODE LISTING

Code	Description
004	P260WIR MIL 24V
009	VHP90CMH-OPEN
010	P105WJD GALV.
011	P125WJD GALV.
012	P130WJD GALV.
013	P160WJD GALV.
014	P175WJD GALV.
015	P185WJD GALV.
016	XP185WJD GALV.
017	P185WJD GALV.
018	P105WIR GALV.
019	P130WIR GALV.
020	P185WIR GALV.
021	P185WIR GALV
022	XP185WIR GALV.
023	P375BWCU GALV.
024	P375WJD GALV.
025	HP300BWCU GALV.
026	HP300WJD GALV.
027	DAYLIGHT 60HZ
047	XP375AWJD
048	BAB185WJD
049	BAP185WJD
050	VHP750WCU
051	HP915WCU
052	XP1000WCU
053	VHP750AWCAT
054	VHP850AWCAT
055	HP900AWCAT
056	XP1000AWCAT
057	XHP825CMH@1800
058	XHP1070CMH-2100
059	XHP1070CMH-1800
060	P425WIR
061	XP375WIR
062	HP350WIR
063	VHP290WIR
064	HP375WJD
069	XHP750CM-2100
070	XHP750CM-1850

Code	Description
071	XHP650CM@1850
072	XHP900CM-2100
073	XHP900CM-1800
074	XHP825CM@2100
075	HP1300CWCU
076	HP1600CWCU
077	XHP1070AWCAT
078	XHP1170WCAT
079	XHP1170WCU
080	XP375AWIR
081	P425AWIR
082	XHP825CM@1800
083	XHP1070CM-2100
084	XHP1070CM-1800
085	HP375AWIR
086	VHP300AWIR
089	P90WIR
100	GR85
101	G85
102	GRR85
103	GRRU85
104	RS85CW
105	RS85CCW
106	DRR85F
107	DRA85
108	GRR85S
109	GH85
110	G85S
118	P105WIR
120	D85
123	P125AWJD
124	P100BWF
130	DR60
134	P100AWW
135	P100AWWU
136	P100CWD
138	P100BWW
139	P100WF
140	DR100
141	P100WFU
142	GR100
144	P100WJDU
149	P110AWD
150	GRB125
151	GRBU125

Code	Description
152	DRB125
153	DRBU125
156	P125WUFU
157	P125WJDU
158	P125WJD
159	DRA125RMS
160	G125
161	D125
162	D125F
165	P110CWD
166	P110BWD
167	P100BWD
168	P125WF
169	P125AWD
170	P125AWW
171	P125BWW
172	P130AWJD
173	P130WJD
174	P150AWD
175	P150AWW
176	P150BWD
177	P150WJD
178	P160AWJD
179	P160WJD
180	P160WC
181	P160AWW
182	P160AWWU
183	P125BWD
184	P125AWF
185	P130WF
186	P160BWW
187	P160WUFU
188	P160WJDU
189	MC2A (AIRFORCE)
197	P125BWF
198	P100DWD
199	P125DWD
200	GR150
201	GRU150
206	GRB150
207	GRBU150
208	GR150S
209	P100FWD
210	P100WJD
211	G150

Code	Description
212	P130WD
214	P130WJD
215	D150F
216	P160WJD
218	P175WJD
219	P185WD
220	G150B
221	P185EWJD
222	XP185WJD-T1
223	P125WD
224	P125WJD
228	P130AWJDU
229	P185WJDUA-T1
231	P185WJDR
232	P185WDR
233	P175DWJD
234	P175AWJDU
235	P185AWJDU (CA re-rate)
241	P185WIR
242	P130WIR
245	P100EWD
246	P105WJD
247	WS14110H
250	GRR160
251	GRRU160
252	DRR160
256	D160
257	DRRD160S
258	XP1060WCU
259	HP935AWCU
262	MHP825WCU
265	VHP750WCU
271	XHP750WCU
272	XHP750CWCAT
274	P125EWD
275	P130BWJD
276	P130CWJD
278	P600WIR
279	HP450WIR
281	XP185DWJD
282	P175CWJD
283	P160CWJD
284	P175DWD/SCAL
286	P185WD
288	XP185WIR

Code	Description
289	VHP400WIR
295	P185WIR
296	P185WJDU
297	P185WJDU-T1
298	USMC6KW-METALHALIDE
299	P175CWD/SCAL
300	GXL175
301	GXLU175
302	DXL175
303	DXLU175H
304	DXL175GM
305	DXLU175GM
306	GXL175S
307	XP175BWJD
308	XP185CWJD
309	P175CWJD
310	P175AWJDU
311	G175
312	HP175CWJD
313	D175
314	P175WJDU-GPC
315	P175WJDU
316	P175WFU
317	P175BWD
318	P175BSD
319	P175BWW
320	DR175F
321	DR175P
322	DRF175SL
323	DRP175SL
324	P175CWD
325	P175CWW
326	P175DWD
327	P185DWJD
328	P185CWJD
329	P185BWJD
330	P185BWW
332	HP320
334	P185CWD
335	P70KW
349	P250AWCU
358	P250WCU
359	P250BWJD
360	DR250FS
361	DR250PS

Code	Description
362	P250AWJD
364	P250WJD
365	P250BWD
367	P250AWD
368	P250WD-M0595
369	P250WD-M-H268
371	DR270
374	HP300WD
376	PTO5/250
377	PTO7/330
378	PTO9/450
379	PTO9/600
380	PTO5/250
381	PTO7/260
382	PTO7
383	PTO9
384	PTO9/620
385	PTO750 2100RPM
386	PTO9/750
387	PTO750/2100
388	HP300AWD
389	P260WIR
390	HP320WD P375WD
394	P250WJD-T1
395	XP335WD
396	HP300BWCU
399	WS18130H
400	DR365GM
406	XP375WJD
408	P375AWD
409	WS20200HHE
410	P375WCU
411	HP300WCU
412	P375AWCU
413	P375BWCU
414	P375WJD
415	WS26350WHE
416	HP355
417	XP380
418	P400
419	HP500W/PTO
422	VHP400AWCU
432	XP525WCU
433	HP450WCU
434	P600WCU

Code	Description
435	P600SD
440	HP450SCAT
441	P600AWCU
442	XP525AWCU
443	HP450AWCU
445	XHP650BWCAT
446	XHP750BWCAT
448	XHP825BWCAT
449	XHP900WCAT-T1
456	XHP1070WCAT-T1
457	WS36650WHE
458	HR2600/250
459	HR2-600/2300
460	D500
462	HP525BWGM
463	HP525CWGM
464	DXL525GM
465	DXL600HPCAT
466	HP600WCU
467	DXL600BP
468	XP600BWGM
469	XP600CWGM
471	HP600AWGM
472	HP600BWGM
473	XP600WCU
474	P700BWGM
475	P700CWGM
476	XHP600SCAT
479	DXL700B
480	XP750AWGM
481	XP750BWGM
482	P750WCU
483	P750SCU
484	XHP750AWGM
485	XHP750BWGM
487	P850AWGM
488	P850BWGM
489	HP750WCU
490	P750WGM
491	P750AWCU
492	HR2750
493	HP850AWGM
494	HP850BW
495	HP750AWCU
496	MM655H

Code	Description
497	XP825WCU
498	XP825AWCU
510	DXL600H
511	DXL600HS
512	MM655HP
513	DXL600A
514	DXL600AH
515	DXL600AH
516	DXLCA600H
517	DXL600BH
518	DXL600PCAT
519	P600WJD
520	DXL650HCU
521	XHP650WCAT
522	HP600AWCU
526	MM890H
527	P750AWCU482
528	XP600AWCU
529	HP600AWCU
530	XHP750WCAT
537	XHP750AWCAT
538	XHP650AWCAT
539	DXL700A
540	DXL700
541	XHP825AWCAT (250PSI)
542	DXL700CAT
543	XHP1070ASCAT
545	DXL750ACAT
546	DXL750B
547	DXL750A
548	DXLCA750
549	DXL750 PAKTRAK
550	DXL750GM
551	DXL750S
552	EXL750 (60HZ)
553	EXL750 (50HZ)
554	DXL750CU
556	XHP900SCAT-T1
557	D750
558	DXL750HCU
559	D750S
560	DXL850
561	DXL850S
562	DXL850CU
563	DXL850CAT

Code	Description
564	DXL850ACAT
565	DXL850A
566	DXL850B
567	MM890HP
569	XHP900SCAT
570	DXL850H
571	DXL850HS
573	XP900AWGM
574	XP900BW
578	XHP900WCAT
579	P900AWCU
580	P900WCU
581	HP1000WCU
583	HP1000AWCU
584	XHP900AWCAT
585	P1100AWGM
586	P1100CWGM
588	XHP1070WCAT
589	HP1300AWGM
590	HP1300BWGM
591	XHP1070SCAT (Keystone)
592	XHP1070SCAT
593	XP1400AWGM
594	XP1400BWGM
595	MM1090H
596	XHP1170SCAT
597	P1600AWGM
598	P1600BWGM
599	MM1290H
611	MM12130HH
621	MM16130HH
624	XHP1150CAT DD
625	XHP1050CAT DD
626	XHP950CAT DD
627	XHP2300CAT DD
628	XHP2100CAT DD
629	XHP1900CAT DD
632	CM655
633	XHP900/350
634	XHP1150GM DD
635	XHP1050GM DD
636	XHP950GM DD
637	XHP2300GM DD
638	XHP2100GM DD

Code	Description
639	XHP1900GM DD
649	CM655H
658	XP1200AWCU
660	HP1300WCU
668	P1300AWCU
669	NXP1300AWCU
670	DXL1400
671	DXL1400S
673	HP1000CWCU
674	XP1200CWCU
675	XP1200BWCU
676	HP1000BWCU
677	P1300BWCU
678	P1300CWCU
680	XP1400WCU
681	NHP1500WCU/NHP1500AWCU
682	NHP1500SCU
686	P1600CAT NG
687	CM990H
689	PB16130HP
690	AF1600
691	PB16130H
692	P1600BWCU-T1
693	P1600AWCU
694	XP1400AWCU
695	HP1300AWCU
696	XP1400WCU-T1
697	PB16130HPE
698	PB16130HE
702	XHP900/350OFCAT
703	XHP900/350GM
705	RS15H
706	XP750WJD
707	VHP825WCU
708	HP935WCU-T1
709	XP1050WCU-T1
710	XP750CWCU
711	XP750BWCU
713	XP825BWCU
716	HP825BWCU
718	XP900CWCU
720	HP600CWCU
721	HP825CWCU
722	HP825DWCU

Code	Description
723	WT244OH
724	XP900DWCU
729	HP1300BWCU-T1
732	XHP1250CM-1800
733	XHP1250CMH-1800
734	VHP750WCAT
735	VHP850WCAT
736	HP900WCAT
737	XP1000WCAT
738	XHP1250CM-2100
739	XHP1250CMH-2100
742	HP600CWCU GALV.
743	XP750CWCU GALV.
744	HP750CWCU GALV.
745	HP750WJD GALV
746	XP825CWCU GALV.
747	XP825WJD GALV.
748	D2000A
749	WT3055H
750	D2000
751	D2000S
753	WT3655H
754	WT3690H
755	WT4690H
756	P90AWIR
759	P110AWIR
762	P135AWIR/ MC-7 (Air Force)
763	XP825CWCU
764	HP750CWCU
765	P900CWCU
766	XP825WJD
767	HP750WJD
768	P900WJD
769	LIGHTSOURCE 50HZ
770	D2300
771	D2500
772	DXL2500
773	DXL2500S
789	LIGHTSOURCE
801	E50WCU
802	E30WCU
803	E20WJD
804	G20SJD
805	G30SCU
806	G45SCU

Code	Description
807	E100WCU
808	E150WCU
809	E20XWJD60HZ
810	E30XWCU
811	E50XWCU60HZ
812	G20SJD50HZ
813	G30SCU50HZ
814	G45SCU50HZ
818	P380CU
819	L8C-4MH
820	P185AWIR
821	XP185AWIR
822	L6C-4MH
823	L6B-4MH
824	L6A-4MH
825	L6-4MH
826	L8-4MH
827	L8A-4MH
828	L8B-4MH
829	P380WPG
833	P185AWIR
834	WT3655HL
835	E25XWCU
836	L5K60HZ
837	L5Y60HZ
841	LIGHTSOURCE - HA
842	RHP750WCAT
843	SHP825WCAT
844	VHP750BWCAT
845	MHP825WCAT
846	HP935WCAT
847	XP950WCAT
848	XP1060WCAT
849	VHP110WJDU
852	WT4690HL
858	HP185CMH
859	VHP200CMH-1850
860	AD55 AIRDRYER
861	AD85
862	AD165
863	DD165
864	A165
865	VHP300CMH-2750
866	VHP500CMH-2100
867	A85

Code	Description
869	A750/1000
870	A1050/1600
871	VHP400CMH-1700
872	VHP550CMH-2100
873	VHP550CMH-2300
875	HP600CMH-2300
876	XP650CMH-2500
877	XHP750CMH-2100
882	XHP750CMH-1850
883	XHP650CMH-1850
884	XHP900CMH-2100
885	XHP900CMH-1800
886	XHP825CMH-2100
900	P100WWU
901	P100WW
902	P250SD
903	P125WD
904	P250WD
905	P150WD
906	P150WW
909	P100SD
910	P100WD
911	P100AWD
912	P100SP
913	P100WP
914	P185AWW
915	P185WW
916	P185SJD
917	P125WW
919	P175WW
920	P175WWU
921	P175WDU
923	P175AWW
924	P175SF
925	P175WF
926	P175AWWU
927	P175SD
928	P175WD
929	XP175WJD
930	P175SP
931	P175WP
932	P185WJD
933	P300SGM
934	P300WGM
936	P335SD

Code	Description
937	P335WD
939	P335SF
940	P335WF
942	P375WD
943	P375SD
944	P375WGM
945	P425SGM
946	P425WGM
947	P450SCAT
949	P250SGM
951	P450SCU
952	P450WCU
953	P175AWD
954	P175AWDU
955	P175ASD
956	XP175AWJD
957	P185AWJD
958	P185ASJD
960	HP525SCU
961	HP525WCU
963	XP600SGM
964	XP600WGM
966	XP600SCU
967	XP600WCU
968	HP600WGM
969	P600XWGM
970	P600WGM
971	XHP750SCAT
972	DXLH700
973	DXL650
974	XHP750GM
975	P700SCU
976	P700WCU
978	XHP750SCU
979	XHP750WGM
980	XHP750SGM
981	XP750WGM
982	P850WGM
983	HP850WGM
984	P1600WCU
985	XP900WGM
986	P1100WGM
987	HP1300WGM
988	XP1400WGM
989	P1600WGM

Code	Description
990	HP525SGM
991	HP525WGM
993	P700SGM
994	P700WGM
A05	OBPS CAT 2 STANDARD
A06	OBPS CAT 2 FORD AUTO
A07	OBPS CAT 3
A08	CAT 130 90CFM
A09	CAT 1 FORD 90CFM
A10	CAT 2 Standard Kit 100-220cfm
A11	CAT 2 Ford AutoTrans Kit
A12	CAT 3 Kit
A13	CAT 1 Standard Kit 30-90cfm
A14	CAT 1 Ford Auto Trans Kit
A15	HP675DWCU
A16	XP750DWCU
A17	HP750DWCU
A18	XP825DWCU
A19	XP950HACAT
A20	XP1060HACAT
A23	P250WJDU-T1
A24	P260AWIR
A25	CS14
A26	G2H
A27	G3H
A28	RHP1070WCAT
A29	N25 3 PHASE 208/120VAC
A30	N25 1 PHASE 120/240VAC
A31	N40 3 PHASE 208/120VAC
A32	N40 1 PHASE 120/240VAC
A33	S30 3 PHASE
A34	S30 1 PHASE
A35	S40 3 PHASE
A36	S40 1 PHASE
A38	HP1600SCAT
A39	P250WJDUA-T1
A40	N60 3 PHASE
A41	N80 3 PHASE
A42	S45 1 PHASE
A43	S60 3 PHASE
A44	S75 3 PHASE
A45	N60 1 PHASE
A46	N80 1 PHASE
A47	S60 1 PHASE
A48	S75 1 PHASE

Code	Description
A49	S100 3 PHASE
A50	S100 1 PHASE
A51	S125 3 PHASE
A52	N130 3 PHASE
A53	N100 3 PHASE
A54	N130 3 PHASE
A55	S20 3 PHASE
A56	S20 1 PHASE
A57	XP375BWIR
A58	P425BWIR
A59	HP375BWIR
A60	VHP300BWIR
A61	HP450AWIR
A62	VHP400AWIR
A63	VHP30RMH OPEN
A64	VHP30RMH CLOSED CENTER
A65	VHP40RMH OPEN
A66	VHP40RMH CLOSED
A67	S150 3 PHASE
A68	S170 3 PHASE
A69	S200 3 PHASE
A70	S230 3 PHASE
A71	S275 3 PHASE
A72	N130 3 PHASE
A73	N130 3 PHASE 208V
A74	N130 208V PMG
A75	N130 480V PMG
A76	N100 3 PHASE 208V
A77	N100 208V PMG
A78	N100 480V PMG
A79	CAT-1 BeltDriveKit (30-90CFM)
A90	NAVY 6KW HP HA
A91	P65WK
A92	P65WKU
A93	XHP1070SCAT
A94	HP60CMH
A95	LIGHTSOURCE A 50HZ
A96	ZX75
A97	ZX125
A98	WL350
A99	WL440
B01	P160BWIR (AirSource)
B02	P185BWIR (AirSource Plus IR)
B03	BL275B
B04	BL370B

Code	Description
B05	BL570B
B06	BL575B
B07	BL2000
B08	DD10S
B09	DD10ST
B10	P185FWJD (AirSource Plus JD)
B11	HP375WCU
B12	XP375WCU
B13	P425WCU
B14	VHP750DWCAT
B15	MHP825BWCAT
B16	XHP700WCAT
B17	SHP750WCAT
B18	VHP750CCAT
B19	MHP825ACAT
B20	XHP750DCAT
B21	SHP825ACAT
B22	VHP750CWCU
B23	MHP825BWCU
B24	HP915AWCU
B25	XP1000AWCU
B26	XHP700WCU
B27	SHP750WCU
B28	VHP750BWCU
B29	MHP825AWCU
B30	HP935BWCU
B31	XP1060AWCU
B32	SHP825WCU EXPORT
B33	XHP750AWCU
B34	P185GWJD
B35	HP1600DWCU
B36	HP1300DWCU
B40	XHP1170WCAT-T3
B41	XHP1070WCAT-T3
B42	XHP1170SCAT-T3
B43	XHP1070BSCAT
B44	XHP1170AWCU
B45	XHP1170BWCAT
B46	XHP1070DWCAT
B47	XHP1170BSCAT
B48	XHP1070CSCAT
B49	HP1600ASCAT
B50	G40WMI-60HZ-T2
B51	G80A
B52	N100480V LPG

Code	Description
B53	N130 480V LPG
B54	G25WMI-60HZ-T2
B55	G60WJD-60HZ-T2
B56	N60
B57	S60
B58	G7AHE
B60	S40
B61	G125
B62	BL2000
B63	G10WMI-60HZ-T2
B65	P260AWIR MIL 24VOLT
B69	VHP750DWCU
B70	MHP825CWCU
B71	HP915BWCU
B72	XP1000BWCU
B73	P185GWJD (CA re-rate)
B74	HP675WCU-T3
B75	XP750WCU-T3
B76	HP750WCU-T3
B77	XP825WCU-T3
B78	XHP1170FrameCAT
B79	XHP700AWCU
B80	SHP750WCU
B81	WL350A
B82	WL440A
B83	HP1600WCU-T3
B84	HP1300WCU-T3
B95	SHP750AWCAT
B96	XHP700AWCAT
B97	VHP750WCAT-T3
B98	MHP825CWCAT
B99	G330A
C01	XHP750CWCAT
C02	SHP825WCAT
C03	VHP750BWCAT
C04	MHP825WCAT
C05	XP950WCAT
C06	P1060WCAT
C07	HP675FWCU
C08	XP750WCU-T2
C09	HP750WCU-T2
C10	XP825WCU-T2
C13	Lightsource A
C14	Lightsource A-60HZ HA
C16	P90WIRU

Code	Description
C17	P90BWIR
C18	NHP1500WCU-T3
C24	G90WJD-60HZ-T3
C27	G145WJD-60HZ-T3
C28	G185WJD-60HZ-T3
C31	G240WJD-60HZ-T3
C32	G315
C34	G450WCU-60HZ-T2
C37	G570WCU-60HZ-T2
C38	G290WCU-60HZ-T3
C40	G340
C44	XHP750WCAT-T3
C45	L6D-4MH
C46	P425WIR-T3
C47	HP375CWIR
C48	XP375WIR-T3
C49	PB16130HE
C50	VHP750EWCAT
C51	P1060AWCAT
C52	XP950AWCAT
C53	MHP825AWCAT
C54	P600WIR-T3
C55	HP450WIR-T3
C56	VHP400WIR-T3
C57	XHP750EWCAT
C58	SHP825AWCAT
C59	MHP825WCU-T3
C60	HP915WCU-T3
C61	XP1000WCU-T3
C62	XHP900BWCAT
C63	XHP1070BWCAT
C64	XHP1070ASCAT (LEPA)
C65	XHP900ASCAT
C67	NHP1500WCU-T3
C68	HP1600FCU-T3
C69	RD1600A
C70	VHP90CMH CLOSED
C71	XP375BWIR
C72	P425BWIR
C73	HP375BWIR
C74	VHP300BWIR
C75	XP375BWIR
C76	P425BWIR
C77	HP375BWIR
C78	VHP300BWIR

Code	Description
C79	P600AWIR
C80	HP450AWIR
C81	VHP400AWIR
C82	P600WIR-FLEX
C83	HP450WIR-T2-FLEX
C84	VHP400WIR-T2-FLEX
C85	P600AWIR
C86	HP450AWIR
C87	VHP400AWIR
C88	G80A
C89	G125
C90	G80A
C91	G125A
C92	G80A FLEX
C93	G125 FLEX
C97	XHP1170FCATS-T3
C98	HP900WCAT
C99	XP375BWIR
D01	P425BWIR
D02	HP375BWIR
D03	VHP300BWIR
D04	P260WIR-ML-T2
D05	HP60CMH
D06	VHP40RMD
D07	P185WIR-FLEX
D08	P185WJD-CP
D09	P185FWJD (AirSource plus JD)
D10	P135WIR-T4I
D11	P185WJDR-T4I
D12	P160BWIR (AirSource)
D13	P260WIR-T3
D14	XP185WIR-T3
D15	MVS6-60HZ-T2 (Blackhawk)
D16	VHP40RMG
D17	14/85
D18	7/170
D19	10/125
D20	14/115
D21	7/71
D22	12/56
D23	7/51
D24	Concrete Mixer CM6
D25	Concrete Mixer CM9
D26	Concrete Mixer CM9P
D27	Mortar Mixer MM6

Code	Description
D28	Mortar Mixer MM6P
D29	Mortar Mixer MM8
D30	Mortar Mixer MM8P
D31	Mortar Mixer MM10
D32	Mortar Mixer MM12
D33	Walk-Behind Trowel WT24
D34	Walk-Behind Trowel WT36
D35	Walk-Behind Trowel WT36A
D36	Walk-Behind Trowel WT46
D37	Walk-Behind Trowel WT46A
D38	Walk-Behind Trowel WT48
D39	Walk-Behind Trowel WT48A
D40	Walk-Behind Trowel WT48D
D41	Walk-Behind Trowel WT48DA
D42	Power Buggy PB16
D43	Power Buggy PB 16E
D44	XP375WCU-T2
D45	P425WCU-T2
D46	HP375WCU-T2
D47	Lightsource B 60Hz
D48	L6-60HZ-T4
D49	L8-60HZ-T4
D50	P90WIRU-T3
D51	P90WIR-T3
D52	P65WK-T4
D53	P65WKU-T4
D54	HP375WIR-T3
D55	L20-60HZ-T2
D56	LS-60HZ-T4
D57	LS-50HZ
D58	XXHP1250FCAT-T3
D59	L20-60HZ-T4
D60	G10B
D61	G25WMI-60HZ-T4I
D62	G40WMI-60HZ-T4I
D63	G70WJD-60HZ-T3
D64	VHP40RMD
D65	XHP1170FCAT
D66	MVS6-60HZ-T4 (Blackhawk)
D67	Lightsource V9
D68	AirSource + JD-CP
D69	AirSource + IR-T2
D70	AirSource-T2
D71	TME CAT 1 30-90 CFM STANDARD ROTARY

Code	Description
D72	TME CAT 1 90 CFM REVERSE ROTARY
D73	TME CAT 2 100-220 CFM STANDARD ROTARY
D74	TME CAT 2 140-160 CFM REVERSE
D75	P185WJD-T4I
D76	P185WYM-T4I
D77	G290WCU-60HZ-T3
D78	G570WCU-60HZ-T2
D79	P260WIR-ML-T3
D80	C185WKU-T2
D81	P250WJD-T3
D82	P260/HP220WYM-T3
D83	VHP600CM-2200
D84	LS-50HZ
D85	XHP1170CM-1800
D86	XHP1070WCAT-ML-T3
D87	12/150
D88	L6-60HZ-T4F
D89	L8-60HZ-T4F
D90	LS-50HZ
D91	LS-60HZ-T4F
D92	LS-60HZ-T4F
D93	XHP750WCAT-ML-T3
D94	7/41 CATEGORY 01
D95	C185WKUB-T4I
D96	G450WCU-2C-T2
D97	G240WJD-2C-T3
D98	LS-60HZ-T4F
D99	P185WJDU-T4I
E01	MC20WHTZ-T4I
E02	MHP85CMH-OPEN
E03	MHP85CMH-CLOSED
E04	C185SKUB-T2
E05	VHP85CMH-OPEN
E06	LSC-60HZ-T4F
E08	NHP1500WCU-EX-T3
E09	HP1600WCU-FX-T3
E09	HP1600WCU-T4I
E10	HP1600WCU-EX-T3
E11	XHP1170FCATS-FX-T3
E16	HP935WCU-FX-T1
E16	HP915WCU-FX-T3
E19	HP750WCU-FX-T3

Code	Description
E20	XP825WCU-FX-T3
E21	XHP1170WCAT-FX-T3
E22	G145WJD-2A-FX-T3
E23	G185WJD-2A-FX-T3
E24	G240WJD-2B-FX-T3
E26	G290WCU-3B-FX-T3
E27	G290WCU-3C-FX-T3
E28	G450WCU-2B-FX-T2
E29	G450WCU-2C-FX-T2
E30	G570WCU-2B-FX-T2
E31	G570WCU-2C-FX-T2
E32	P250WJD-T4I
E37	XHP1170WCAT-EX-T3
E44	G325WCU-3A-T4I
E45	XHP1000WCAT-T4I
E47	XP825WCU-T4I
E48	HP750WCU-T4I
E51	G240WCU-3A-T4I
E53	G70WJD-2A-FX-T3
E54	G90WJD-2A-FX-T3
E55	P260/HP220WYM-FX-T3
E56	P260/HP220WYM-FX-T3
E57	G190WCU-3A-T4I
E61	XHP1170WCAT-EU-FX-T3
E68	HP375WJD-FX-T3
E69	XP375WJD-FX-T3
E70	HP450WJD-FX-T3
E71	VHP400WJD-FX-T3
E72	P600WJD-FX-T3
E77	G150WCU-3A-T4I
E78	HP935WCU-EX-T1
E80	XP1050WCU-EX-T1
E81	XP375WCU-FX-T3
E82	HP375WCU-FX-T3
E83	LSCWKUB-60HZ- T4F
E84	LSCWKUB-50HZ
E85	P425/HP375WCU-T4I
E86	P125WJDU-T4I
E91	HP450/VHP400WCU-T4I
E94	G85WCU-3A-T4I
E95	G125WCU-3A-T4I
E96	G70WCU-3A-T4I
E97	HP1600WCU-T4I
F01	XHP1070WCAT-ML-FX-T3
F03	G40WMI-2A-T4I

Code	Description
F05	P185WJD-FX-T4I
F06	P185WJDU-FX-T4I
F08	C185WKUB-FX-T4I
F09	P250WJD-FX-T4I
F15	P425/HP375WCU-T4I
F16	L20WIZ-60Hz-FX-T4i
F17	XHP1170WCU-T4i
F18	G70WCU-3A-T4I-PM
F19	G125WCU-3A-T4I-PM
F20	XP200WJD-T4I
F21	XP200WJD-FX-T4i
F22	XHP1170WCAT-FX-T3
F23	C185WDZ-T4F
F24	P185WDZ-T4F
F26	HP915WCU-T4i
F27	XP1000WCU-T4i
F30	VP900eWBAL-VS
F31	XP825WCU-T4F
F32	HP750WCU-T4F
F33	G240WCU-3A-T4F
F35	G190WCU-3A-T4F
F36	G150WCU-3A-T4F
F37	P185WKUB-T2-EX
F38	C185WKUB-T2-EX
F44	P250/HP185WDZ-T4F
F45	C185WKUBG
F50	L20WIZ-60Hz-T4i
F51	L20WIZ-60Hz-FX-T4i
F55	NG160WPS-3E-NGE
F56	NG225WPS-3E-NGE
F57	NG295WPS-3E-NGE
F63	P185WDO-T4F

PRODUCT HISTORY - BY SERIAL NUMBER

This chart follows the path of portable power products from the inception of the vane style compressor through today's EPA models. Listed is the range of serial numbers that were manufactured in each year (in some cases the figures are close estimates).

Model Year	Machines Manufactured			Notes
1950-1951	0	thru	474	
1952	475	thru	2303	
1953	2304	thru	4124	
1954	4125	thru	5834	
1955	5835	thru	8806	
1956	8807	thru	12368	
1957	12369	thru	15334	
1958	15335	thru	17640	
1959	17641	thru	20328	
1960	20329	thru	23295	
1961	23296	thru	25712	
1962	25713	thru	27729	
1963	27730	thru	30822	
1964	30823	thru	34645	
1965	34646	thru	39452	
1966	39453	thru	42564	
1967	42565	thru	50057	
1968	50058	thru	53632	
1969	53633	thru	58684	
1970	58682	thru	62772	
1971	62773	thru	66244	
1972	66245	thru	71451	
1973	71452	thru	77753	
1974	77754	thru	84524	
1975	84525	thru	90149	
1976	90150	thru	93967	
1978	93968	thru	100723	
1979	100724	thru	107133	
1980	107134	thru	113627	
1981	113628	thru	119743	
1982	119744	thru	126846	
1983	126847	thru	131612	
1984	131613	thru	136440	
1985	136441	thru	144594	
1986	144595	thru	152287	
1987	152288	thru	159256	
1988	159257	thru	165580	
1989	165581	thru	173446	

Model Year	Machines Manufactured			Notes
1990	173447	thru	181306	
1991	181307	thru	188616	
1992	188617	thru	203921	
1993	203922	thru	222156	
1994	222157	thru	243146	
1995	243147	thru	252474	
1996	252475	thru	261282	
1997	261283	thru	272084	
1998	272085	thru	284846	
1999	284847	thru	296440	
2000	307552	thru	307551	
2001	318481	thru	318480	
2002	326650	thru	326649	
2003	334231	thru	334230	
2004	345001	thru	349139	Beginning with the year 2004 the serial ranges listed denote model year rather than the build year.
2005	349140	thru	360843	
2006	360844	thru	375986	
2007	375987	thru	391348	
2008	391349	thru	404207	
2009	404208	thru	409633	409634-409673 canceled serial #
2010	409674	thru	417954	includes 409282-409284 & 409625-409629
2011	418000	thru	430210	
	430219	thru	430340	
	430361	thru	430363	
	430376	thru	430384	
	431037	thru	431050	
2012	430211	thru	430218	
	430341	thru	430360	
	430364	thru	430375	
	430385	thru	431036	
	431051	thru	446199	
2013	446200	thru	457295	For actual build date consult warranty system.
2014	457296	thru	468831	
2015	468832	thru		

The Portable Product

Ingersoll Rand has been in the forefront of compressor technology, design and manufacturing since the early 1900's. From piston to vane, and into the current era of screws, Ingersoll Rand has maintained its place as "World Leader." A brief historical timetable has been constructed to serve as an overview of our evolution in the construction industry.

1902

At the turn of the century, stationary air compressors were physically large and heavy requiring bulky, solid foundations. The first portable was built in 1902 by the Rand Drill Company in Painted Post, NY by mounting a water-cooled stationary compressor on wheels.

1906

The Ingersoll-Sergeant Drill Co. (Easton, PA, Phillipsburg, NJ) merged with the Rand Drill Co. (Painted Post, NY; Sherbrooke, Quebec; Athens, PA; Tarrytown, NY) to form the Ingersoll Rand Company.

1912

Type-12 portables were built; single-staged, water-cooled, driven by steam engines.

1913

A special Tie Tamper compressor was developed for railway service. It consisted of one two-stroke-cycle gasoline engine power cylinder and one Type-12 air cylinder with a common crankshaft.

1917

Type-14 portables were built. This was the first compact portable. A large number were used in World War I.

1921

A more complete line of portables (Type 20) was developed with vertical single-acting duplex water-cooled compressor cylinders direct-connected or geared to four cylinder, four cycle tractor-type gasoline engines. These were very popular through the 20's and several units are still operating today.

1930

Ingersoll Rand introduced the first high pressure portable, the "XL" rated at 330 cfm/300 psig or 270 cfm @ 500 psig engine was a Waukesha gasoline engine or an IR oil (spark ignited diesel fuel) engine. Compressor was the XOB horizontal, water-cooled, two cylinder, two stage, double-acting type.

1933

Ingersoll Rand introduced the Type-40 portable, which was the first “V” type air cooled two-stage portable. At this time, we started rating portables on air delivery rather than on piston displacement. Speed was about 900 rpm.

1938

The “A” line was announced. This was a streamlined, sturdy, compact Type-40 compressor.

1939

We introduced the first practical 500 cfm portable with multi-speed regulation.

1940

Ingersoll Rand introduced a complete new “K” series mobile air Type-40 air cooled compressor. During World War II, the government standardized on K-315 portables.

1945

We introduced the KA series which was an improvement over the K series with improved specification regulation.

1950

Ingersoll Rand revolutionized the portable compressor business by introducing the Cyro-Flo two-stage rotary slide vane DR-600 powered by a General motors 6 cylinder diesel engine.

This was the first successful application of rotary compressors for portable use. The R-600 was followed by the R-105, R-210, and R-315 series. The KA line of portables was discontinued as each rotary series became available.

1956

We added to the Gyro-Flo line, the GR-85 single-stage rotary, which was the first single-stage rotary portable developed. We also introduced a rotary R-900 in 1956. Ingersoll Rand introduced the R-250 and R365 which became the industry standard series and discontinued the R-210 and R-315. We also redesigned the R-125 and introduced the RA-125. At this time, the R-125 was discontinued.

1961

This was another important year in Ingersoll Rand portable history. We introduced the Spiro-Flo DL-1200. This was the first single engine driven 1200 cfm portable in the world; and the first twin screw portable compressor on the market. Gardner-Denver introduced their Roto-Screw compressor two days later. In 1961 we also introduced the RS-85 and RS-125 power take-off compressors.

1963

On October 15th, we announced the new DL-900 twin-screw portable compressor and discontinued the DR900. This was another step in the portable division's efforts to maintain Ingersoll Rand as the leader in the portable compressor business. We have met the problem of customer demands for large capacity portable compressors by continually designing and developing lighter weight complete portable packages throughout the years.

1966

The DL-600 twin-screw portable was added to the equipment line. It utilized a 175mm size airend and complimented the DL-1200 and DL-900.

1968

Ingersoll Rand introduced the first truly quiet portable air compressor. This unit was a DL900S, delivering 900 cfm at 100 psi. This unit was primarily designed for the quiet noise requirements of New York City and other eastern metropolitan areas.

1970

Ingersoll Rand introduced the DXL-750 powered by GM 6V-71 which quickly established itself as the dominate large portable for Rock Drill Crawlair applications. They were very popular for interstate highway construction. The XL models later ranged from 600-1400 cfm.

Ingersoll Rand developed and produced 112 RMS250 Military Units for Tacom; units were used extensively in Vietnam.

Ingersoll Rand introduced the RR-85 and RR160 featuring repeatable end plates and slot bottom porting for improved efficiency. These cost effective products were directed toward the rental market.

1978

Ingersoll Rand introduced the world's largest compressor. A model D2000, capable of delivering 2000 cfm at 150 psi and powered by a General Motors 16V-71 Detroit Diesel engine, the same design also incorporated a 1750 cfm at 125 psi unit powered by General Motors 12V-71 Detroit Diesel engine. Ingersoll Rand expanded with the Whisperized line to include 1200 cfm.

1972

Ingersoll Rand introduced a new line of small units in one package called the "Unipac." It featured IR's first 175 cfm oil flooded screw along with 150 cfm two-stage vane and 125 cfm single-stage vane powered by a variety of diesel and gasoline engines. This unit established the principle of multiple-mode common packages.

1973

Ingersoll Rand introduced the first high pressure two-stage oil flooded screw portable 750 cfm at 250 psi in a DXL package which was followed by a Whisperized package in 1974.

1974

Ingersoll Rand introduced the D160SL upper Silenced Model (below 70dBA at 1 meter) on a limited production, pushing noise levels to the quietest portable even manufactured.

1975

Ingersoll Rand manufactured a 5000 cfm portable compressor for use with the mine rescue team in South Africa. This unit was a Whisperized design rated at 85 dBA at on meter in accordance with CAGI Pneurop test standards. The unit rating was 5000 cfm at 100 psi.

1976

Ingersoll Rand introduced the first of a family of skid mounted oil field packaged air compressors. The units could either be single module or double module units. Each module was capable of 1150 cfm at 250 psi or 750 cfm at 400 psi, depending on the pressure setting of the unit.

Ingersoll Rand introduced the P425GM and P600GM mid-size packages to meet EPA Noise Level. The R365 was removed.

1977

Ingersoll Rand introduced a totally new line of two-wheel portable air compressors. These units were all of screw-type air end construction and whisperized to meet U.S.A. EPA noise levels of 75 dBA at seven meters. Sizes introduced were 100 cfm, 175 cfm, 300, cfm, and 335 cfm, all at 100 psi.

1971

Ingersoll Rand introduced the larger versions of the Whisperized EPA units. These units ranged from 525 cfm 1600 cfm with various pressure ratings, depending on the engine and package design.

1979

Ingersoll Rand introduced the P250WD utilizing the Deuta engine. Size and fuel economy were superior to any competitive products.

Unique “utility” compressors in 100-175 cfm were developed, designed for truck mounting rather than “less running gear” portables used by the industry.

1982

Ingersoll Rand introduced 2 new models; P100AWD and P375WD units powered by Deutz engines. Units were built using state of the art design features.

Second generation oil field units were developed incorporating the new “HR” (High Reliability) line of airends; significantly more rugged product than its predecessor.

1983

Ingersoll Rand introduced three new models; the 9750, XP825 and P900. These models, powered by Cummins engines, were incorporated in a “Fast Track” design with most components interchangeable. Units can be towed by much smaller vehicles than previous models. This was the first product totally designed on the CAD system.

1984

We received U.S. Army approval product a P250 mounted on a military trailer. The contract eventually resulted in 1,807 units being produced.

1986

Second generation “utility” units were introduced with superior features to benefit the customer: 34” width, central removal drains, improved sliding doors and operator controls convenient for truck mounting.

1987

A new line of products were introduced with the release of 20, 30 and 50 KW Gensets powered by John Deere and Cummins engines and using Kohler generators. Customer benefits and features were far superior to competition.

The P1600WCU, a smaller and lighter unit than released in 1978, was the first of a series of products introduced in the 300-400 HP package.

U.S. Air Force approval was given to produce the MC-2A (15 cfm / 200 psi) compressor for flight line use. With exercise of option, contract was for 2260 units.

1989

Ingersoll Rand introduced the XHPWCAT. This unit, utilizing the CAT 3406 engine, was Ingersoll Rand’s first truly portable 350 psi machine.

1990

The 300-400 HP package expanded to include 1000, 1200, and 1300 cfm models. The 375 Deutz family expanded to include 400 and 425 cfm models. The AF1600 Aftercooler was introduced. The second generation Gensets were introduced; resulting in a much quieter operating unit.

The 100 and 125 cfm units in the new “Prestige” family were released. This was highlighted by the first use of an 85mm screw air end.

1991

The “Prestige” family expanded to include 130 thru 185 cfm models incorporating the 85mm air end, and a new 250 cfm unit driven by a John Deere diesel engine.

A new line of product was introduced with the release of the L6 and L8 Light Towers.

The Generator line was expanded with the introduction of units covering the 2500 thru 6000 watt range.